
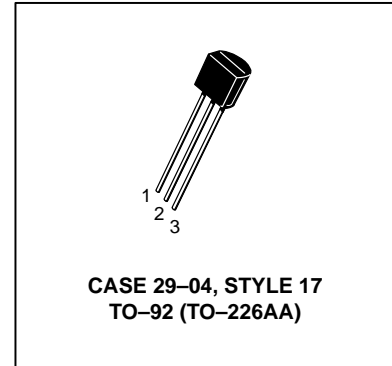


**Amplifier Transistors**  
**NPN Silicon**

**BC546, B**  
**BC547, A, B, C**  
**BC548, A, B, C**



www.DataSheet4U.com

**MAXIMUM RATINGS**

Rating	Symbol	BC 546	BC 547	BC 548	Unit
Collector–Emitter Voltage	$V_{CEO}$	65	45	30	Vdc
Collector–Base Voltage	$V_{CBO}$	80	50	30	Vdc
Emitter–Base Voltage	$V_{EBO}$	6.0			Vdc
Collector Current — Continuous	$I_C$	100			mAdc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	625 5.0			mW mW/°C
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	1.5 12			Watt mW/°C
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	–55 to +150			°C

**THERMAL CHARACTERISTICS**

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	200	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	°C/W

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

**OFF CHARACTERISTICS**

Collector–Emitter Breakdown Voltage ( $I_C = 1.0\text{ mA}, I_B = 0$ )	BC546 BC547 BC548	$V_{(BR)CEO}$	65 45 30	— — —	— — —	V
Collector–Base Breakdown Voltage ( $I_C = 100\ \mu\text{Adc}$ )	BC546 BC547 BC548	$V_{(BR)CBO}$	80 50 30	— — —	— — —	V
Emitter–Base Breakdown Voltage ( $I_E = 10\ \mu\text{A}, I_C = 0$ )	BC546 BC547 BC548	$V_{(BR)EBO}$	6.0 6.0 6.0	— — —	— — —	V
Collector Cutoff Current ( $V_{CE} = 70\text{ V}, V_{BE} = 0$ ) ( $V_{CE} = 50\text{ V}, V_{BE} = 0$ ) ( $V_{CE} = 35\text{ V}, V_{BE} = 0$ ) ( $V_{CE} = 30\text{ V}, T_A = 125^\circ\text{C}$ )	BC546 BC547 BC548 BC546/547/548	$I_{CES}$	— — — —	0.2 0.2 0.2 —	15 15 15 4.0	nA   $\mu\text{A}$



**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted) (Continued)


Characteristic	Symbol	Min	Typ	Max	Unit
<b>ON CHARACTERISTICS</b>					
DC Current Gain ( $I_C = 10 \mu\text{A}$ , $V_{CE} = 5.0 \text{ V}$ )	$h_{FE}$	—	90	—	—
	BC547A/548A	—	150	—	—
	BC546B/547B/548B	—	270	—	—
	BC548C	—	270	—	—
( $I_C = 2.0 \text{ mA}$ , $V_{CE} = 5.0 \text{ V}$ )	BC546	110	—	450	—
	BC547	110	—	800	—
	BC548	110	—	800	—
	BC547A/548A	110	180	220	—
	BC546B/547B/548B	200	290	450	—
	BC547C/BC548C	420	520	800	—
( $I_C = 100 \text{ mA}$ , $V_{CE} = 5.0 \text{ V}$ )	BC547A/548A	—	120	—	—
	BC546B/547B/548B	—	180	—	—
	BC548C	—	300	—	—
Collector–Emitter Saturation Voltage ( $I_C = 10 \text{ mA}$ , $I_B = 0.5 \text{ mA}$ )	$V_{CE(sat)}$	—	0.09	0.25	V
( $I_C = 100 \text{ mA}$ , $I_B = 5.0 \text{ mA}$ )		—	0.2	0.6	
( $I_C = 10 \text{ mA}$ , $I_B = \text{See Note 1}$ )		—	0.3	0.6	
Base–Emitter Saturation Voltage ( $I_C = 10 \text{ mA}$ , $I_B = 0.5 \text{ mA}$ )	$V_{BE(sat)}$	—	0.7	—	V
Base–Emitter On Voltage ( $I_C = 2.0 \text{ mA}$ , $V_{CE} = 5.0 \text{ V}$ )	$V_{BE(on)}$	0.55	—	0.7	V
( $I_C = 10 \text{ mA}$ , $V_{CE} = 5.0 \text{ V}$ )		—	—	0.77	

**SMALL–SIGNAL CHARACTERISTICS**


Current–Gain — Bandwidth Product ( $I_C = 10 \text{ mA}$ , $V_{CE} = 5.0 \text{ V}$ , $f = 100 \text{ MHz}$ )	$f_T$	150	300	—	MHz
	BC546	150	300	—	
	BC547	150	300	—	
	BC548	150	300	—	
Output Capacitance ( $V_{CB} = 10 \text{ V}$ , $I_C = 0$ , $f = 1.0 \text{ MHz}$ )	$C_{obo}$	—	1.7	4.5	pF
Input Capacitance ( $V_{EB} = 0.5 \text{ V}$ , $I_C = 0$ , $f = 1.0 \text{ MHz}$ )	$C_{ibo}$	—	10	—	pF
Small–Signal Current Gain ( $I_C = 2.0 \text{ mA}$ , $V_{CE} = 5.0 \text{ V}$ , $f = 1.0 \text{ kHz}$ )	$h_{fe}$	125	—	500	—
	BC546	125	—	900	—
	BC547/548	125	—	900	—
	BC547A/548A	125	220	260	—
	BC546B/547B/548B	240	330	500	—
	BC547C/548C	450	600	900	—
Noise Figure ( $I_C = 0.2 \text{ mA}$ , $V_{CE} = 5.0 \text{ V}$ , $R_S = 2 \text{ k}\Omega$ , $f = 1.0 \text{ kHz}$ , $\Delta f = 200 \text{ Hz}$ )	NF	—	2.0	10	dB
	BC546	—	2.0	10	
	BC547	—	2.0	10	
	BC548	—	2.0	10	

Note 1:  $I_B$  is value for which  $I_C = 11 \text{ mA}$  at  $V_{CE} = 1.0 \text{ V}$ .


**BC546, B BC547, A, B, C BC548, A, B, C**

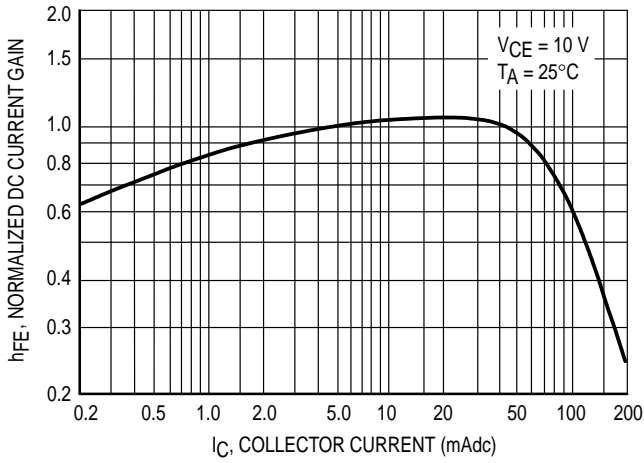


**Figure 1. Normalized DC Current Gain**

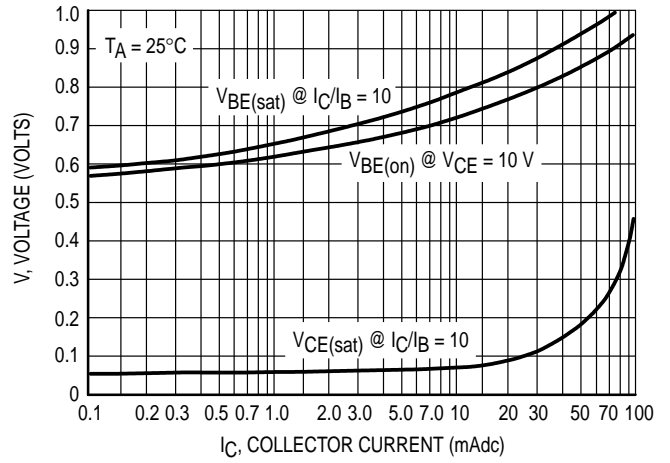

**Figure 2. "Saturation" and "On" Voltages**

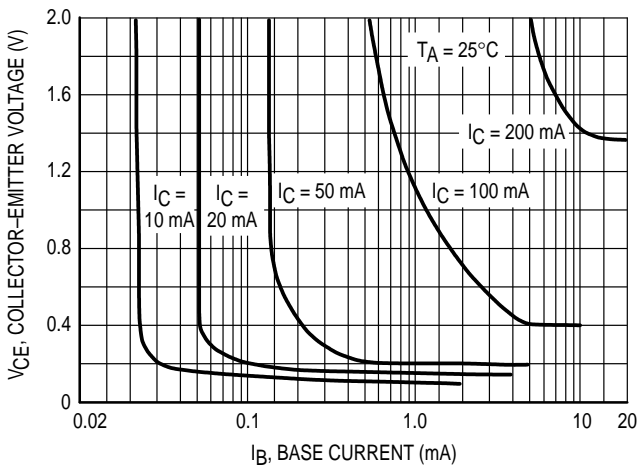


**Figure 3. Collector Saturation Region**

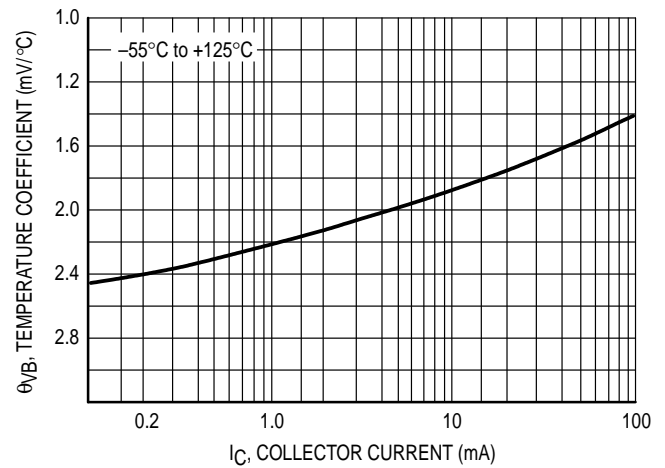


**Figure 4. Base-Emitter Temperature Coefficient**

**BC547/BC548**

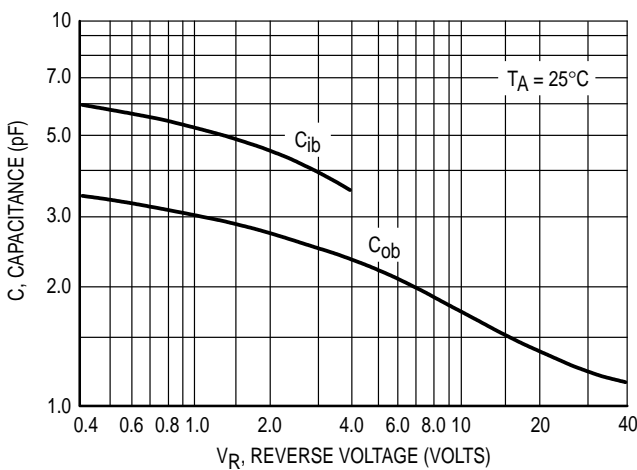

**Figure 5. Capacitances**

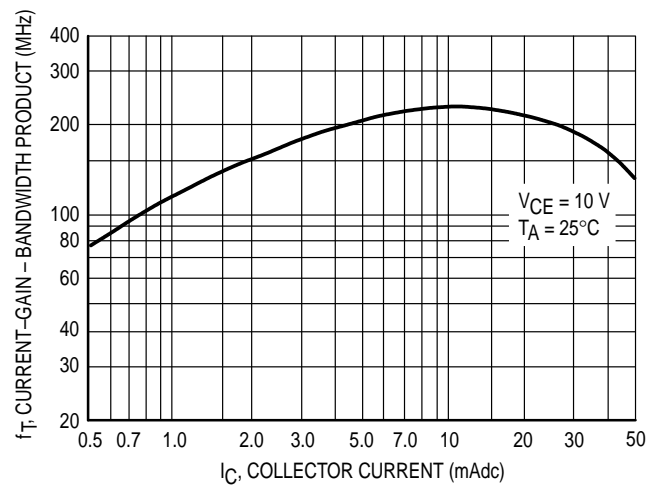

**Figure 6. Current-Gain - Bandwidth Product**

BC547/BC548

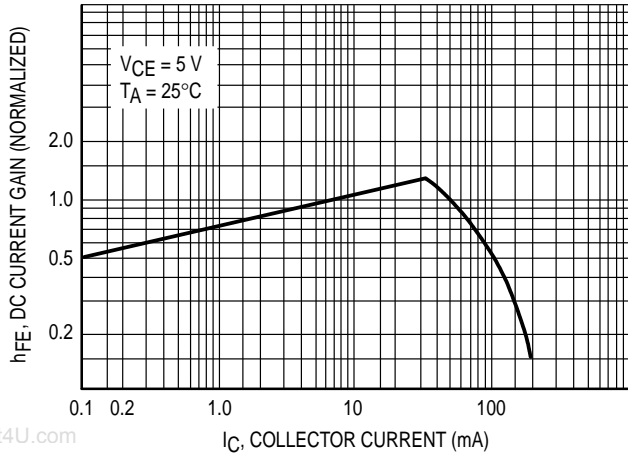


Figure 7. DC Current Gain

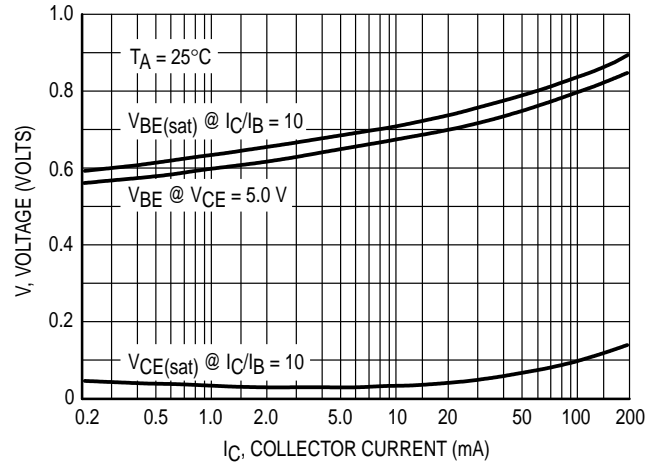


Figure 8. "On" Voltage

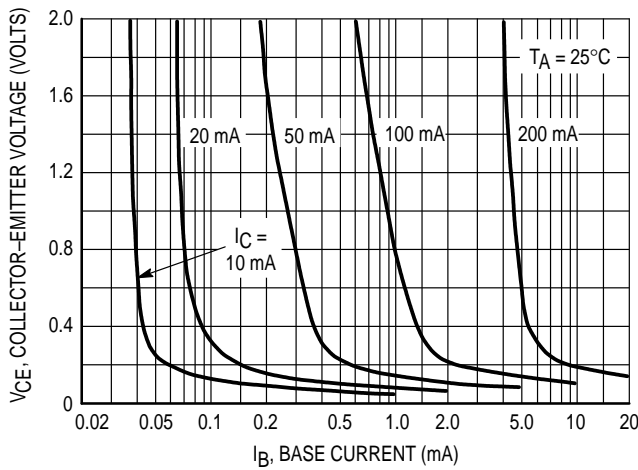


Figure 9. Collector Saturation Region

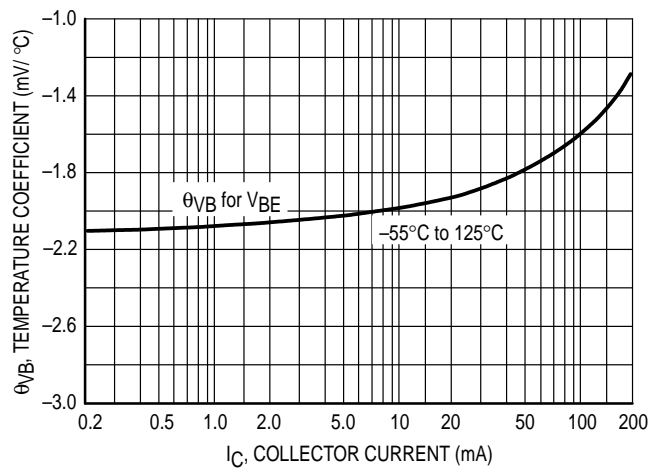


Figure 10. Base-Emitter Temperature Coefficient

BC546

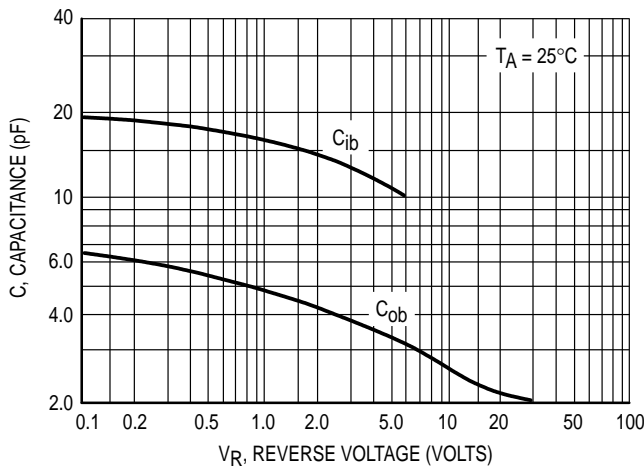


Figure 11. Capacitance



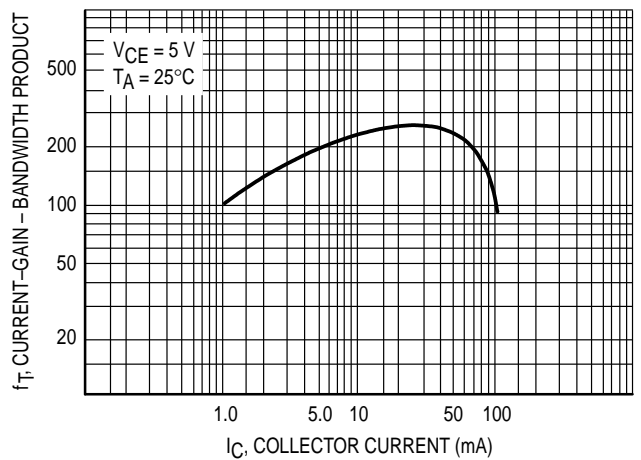


Figure 12. Current-Gain - Bandwidth Product

PACKAGE DIMENSIONS

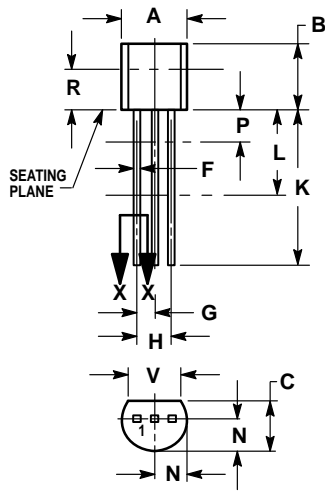


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
  4. DIMENSION F APPLIES BETWEEN P AND L. DIMENSION D AND J APPLY BETWEEN L AND K. MINIMUM LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.022	0.41	0.55
F	0.016	0.019	0.41	0.48
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	—	12.70	—
L	0.250	—	6.35	—
N	0.080	0.105	2.04	2.66
P	—	0.100	—	2.54
R	0.115	—	2.93	—
V	0.135	—	3.43	—

CASE 029-04  
(TO-226AA)  
ISSUE AD

- STYLE 17:
1. PIN 1. COLLECTOR
  2. BASE
  3. EMITTER

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

**How to reach us:**

**USA/EUROPE:** Motorola Literature Distribution;  
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,  
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

**MFAX:** RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244-6609  
**INTERNET:** <http://Design-NET.com>

**HONG KONG:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

