


AYDIN VECTOR

PDF-108 PROGRAMMABLE DATA FILTER

T-64-05

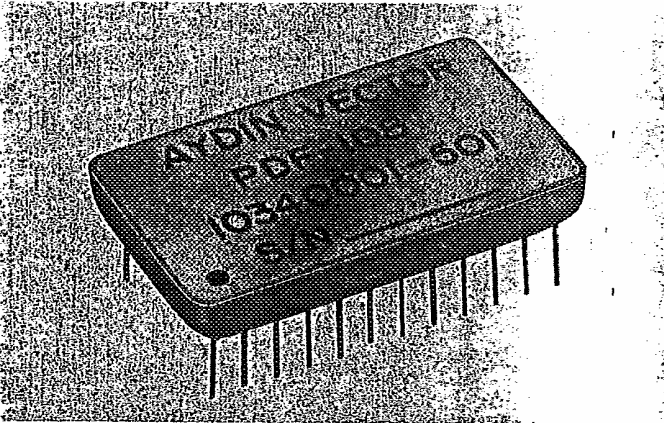

TYPE OF CIRCUITRY:

Programmable gain and offset differential input instrumentation amplifier followed by programmable cutoff frequency low pass filter.

SIGNAL INPUT VOLTAGE RANGE:

± 10 Vdc maximum.

DIFFERENTIAL INPUT IMPEDANCE:

>100 megohms in parallel with 12 pF.

COMMON MODE INPUT IMPEDANCE:

>100 megohms in parallel with 12 pF.

INPUT BIAS CURRENT (either Input):

60 nanoamperes maximum @ -25°C to $+85^{\circ}\text{C}$.

COMMON MODE REJECTION RATIO, Dc TO 60 Hz:

At Gain = 1000 , 110 dB Minimum.

At Gain = 100 , 100 dB Minimum.

At Gain = 1 , 70 dB Minimum.

GAIN RANGE:

1 to 1000 , programmable by external resistor/pot combination.

FIXED GAIN ACCURACY @ 25°C : Gain = $1000 \pm 0.2\%$. (unit to unit)

Gain = $100 \pm 0.1\%$. Gain of "1" and the above gains are supplied.

GAIN STABILITY: 0.35% @ $G=100$

1% @ $G=1000$.

OFFSET CORRECTION RANGE @ $G=100$: ± 50 mVdc programmable by external resistor/pot combination.

OFFSET DRIFT OVER TEMPERATURE RANGE:

$\pm 0.1\%$ of F.S. @ $G=1$

$\pm 0.3\%$ of F.S. @ $G=100$

$\pm 2\%$ of F.S. @ $G=1000$

OFFSET CORRECTION TERMINAL:

- Input Range: ± 10 Vdc Maximum.
- Voltage Gain To Output: Unity, with positive sense.

OUTPUT NOISE: 2 mV ptp @ $G=100$

20 mV ptp @ $G=1000$

OUTPUT CURRENT:

50 mA typ.

OUTPUT IMPEDANCE:

0.1 Maximum (Output shorted to load sense).

OUTPUT VOLTAGE SWING, $1k \parallel 1500pF$ LOAD:

± 10 Vdc.

OUTPUT NON-LINEARITY:

$\pm 0.2\%$ Maximum.

DISTORTION:

$\pm 0.2\%$ Maximum @ f_{out} BW, $< V_{out} = 20$ V ptp.

FILTER TYPE:

Low Pass. (The following specifications exclude external resistor drift).

CHARACTERISTICS:

6 -pole Butterworth, with final roll-off of -36 dB/octave, to within ± 3 dB of theoretical response.

PHASE ACCURACY:

$\pm 1^{\circ}$ from unit to unit

CUTOFF FREQUENCY RANGE:

7.14 Hz standard, programmable up to 10 kHz maximum by six resistors.

CUTOFF FREQUENCY POINT:

-3.0 dB from reference mid band response.

CUTOFF FREQUENCY ACCURACY, INITIAL:

$\pm 5\%$, exclusive of external programming resistor drift.

CUTOFF FREQUENCY, TEMPERATURE COEFFICIENT:

$\pm 5\%$ over the stated operating temperature range.

TEMPERATURE RANGE, OPERATING:

-25°C to $+85^{\circ}\text{C}$ (Consult factory for wider temperature range).

TEMPERATURE RANGE, STORAGE:

-55°C to $+125^{\circ}\text{C}$

SIZE:

0.2 " high, 0.77 " wide, 1.27 " long, 24 pins.

POWER INPUT SUPPLY VOLTAGE:

$+15\text{V}$ and -15Vdc with 0.5% regulation recommended.

POWER SUPPLY CURRENT (Ea. Supply):

mA typ, mA max., exclusive of output load current.

RESISTOR TABLE FOR GAIN PROGRAMMING

GAIN	(RG) REQUIRED RESISTOR
1.0	OPEN
10.0	4440 ±20%
100	404 ±20%
1000	40 ±20%

ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE:

OPERATING:

-25°C to +85°C (Consult factory for extended temperature range).

STORAGE:

-45°C to +125°C.

VIBRATION:

Capable of withstanding greater than 30g from 55 to 200 Hz in each major axis.

BURN-IN:

100% burn-in for 168 hours @ 125°C (power applied, signal applied).

SHOCK:

Capable of withstanding at least 20g shock in each major axis.

ACCELERATION:

Capable of withstanding at least 100g acceleration in each major axis.

ALTITUDE: Unlimited

HUMIDITY:

95% RH non-condensing.

RECOMMENDED EXTERNAL RESISTORS FOR GAIN:


Programming, Fixed; RN55C

Variable: Cermet, or Low T.C. Wirewound Type

Recommended External Resistors for Cutoff Frequency Programming

PIN	FUNCTION
1	LOAD SENSE
2	OUTPUT
3	FILTERED OUTPUT
4	UNFILTERED BUFFER OUT
5	REF VOLTAGE
6	+15VDC PWR
7	COMM. R5 & R6
8	FC RES6
9	COMM R3 & R4
10	FC RES R5
11	FC RES R4
12	FC RES R2
13	FC RES R3
14	COMM R1 & R2
15	FC RES R1
16	CASE GND
17	GAIN RES 2
18	GAIN RES 1
19	X1000 FIXED GAIN
20	X100 FIXED GAIN
21	DIFF INPUT (-)
22	DIFF INPUT (+)
23	PWR & SIG RTN & CASE GND
24	-15VDC PWR

Outline Drawing

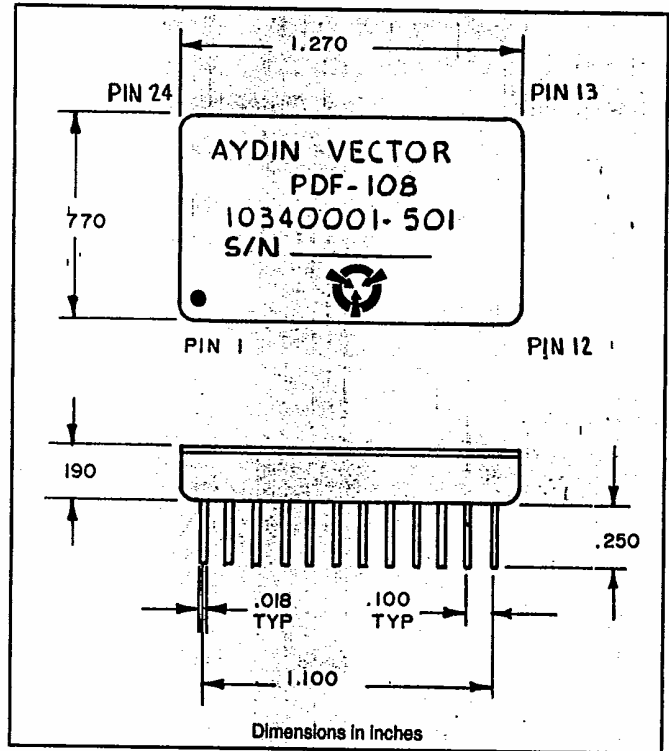

Bulletin No.: 1034000-501/1/87 1M/Printed in USA.



NEWTOWN INDUSTRIAL COMMONS • P.O. Box 328, NEWTOWN PA 18940-0328 • (215) 968-4271 • TWX: 510-667-2320 • FAX: 215-968-3214