


FEATURES

- Board mount type “GT” package: 17 pins
- InGaAs-APD with pre-amplifier
- Integrated Design Optimizes Performance at Bit Rates up to 10.7Gb/s
- Electrical Differential Output
- High Sensitivity: -26.5dBm
- Operates in both C and L wavelength bands

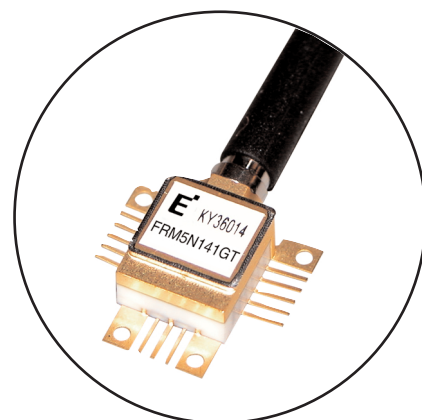

APPLICATIONS

This APD with preamplifier is intended to function as an optical receiver at 1,310nm or 1,530-1,610nm in SONET, SDH, DWDM or other optical fiber systems operating up to 10.7Gb/s. The typical transimpedance (Z_t) value of 1,200 Ω optimizes the total bandwidth for 10Gb/s application. The detector preamplifier is DC coupled and has an electrical differential output.

DESCRIPTION

The FRM5N141GT incorporates a high bandwidth InGaAs APD photo diode, a GaAs amplifier in a hermetically sealed board mount type package. The APD is processed with modern epitaxial techniques resulting in a reliable performance over a wide range of operating conditions.

ABSOLUTE MAXIMUM RATINGS ($T_c=25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Ratings		Unit
		Min.	Max.	
Storage Temperature	T_{stg}	-40	+85	$^\circ\text{C}$
Operating Temperature	T_{op}	-5	+75	$^\circ\text{C}$
Supply Voltage	V_{ss}	-6	0	V
APD Reverse Voltage	V_R	0	$V_B(\text{Note})$	V
APD Reverse Current	I_R	-	4(peak)	mA

Note: Since V_B may vary from device-to-device, V_B data is attached to each device for reference.

OPTICAL & ELECTRICAL CHARACTERISTICS

(T_C=25°C, λ=1,550nm, V_{SS}=-5.2V, unless otherwise specified)

Parameter	Symbol	Test Conditions	Limits			Unit	
			Min.	Typ.	Max.		
APD Responsivity	R	λ = 1,310nm, M=1	0.75	0.85	-	A/W	
		λ = 1,550nm, M=1	0.75	0.90	-		
		λ = 1,610nm, M=1	-	0.80	-		
APD Breakdown Voltage	VB	ID = 10μA	20.0	25.0	30.0	V	
Temperature Coefficient of VB	Γ	Note (1)	0.03	0.05	0.07	V/°C	
AC Transimpedance	Z _t	f = 750MHz, Single-end	800	1200	-	Ω	
Maximum Output Voltage Swing	V _{clip}	Saturated Output Voltage	350	550	750	mV	
Bandwidth	BW	-3dB from 750MHz, Pin=-20dBm	M=9	6.0	7.5	8.5	GHz
			M=3	6.0	7.5	-	
Lower Cut-off Frequency	f _{cl}	-3dB from 750MHz, Pin=-20dBm	-	40	100	kHz	
Peaking	d _{pk}	130MHz to BW, Pin=-20dBm, M=9	-	0.5	-	dB	
Group Delay Deviation	GD	1GHz to 4GHz, Pin=-20dBm, M=9	-	30	-	ps _{p-p}	
		1GHz to 6GHz, Pin=-20dBm, M=9	-	50	-		
Output Return Loss	S ₂₂	130MHz to 6GHz	-	12	-	dB	
		130MHz to 8GHz	-	7	-		
Minimum Sensitivity	P _r	10Gb/s, NRZ, PRBS=2 ³¹ -1, B.E.R.=10 ⁻¹² , VR=Optimum, Rext=13dB	25°C	-	-26.5	-25.0	dBm
			75°C	-	-25.5	-24.0	
Maximum Overload	P _O	10Gb/s, NRZ, PRBS=2 ³¹ -1, B.E.R.=10 ⁻¹² , M=3, Rext=13dB	-7	-5	-	dBm	
Optical Return Loss	ORL	λ = 1,550nm	27	-	-	dB	
		λ = 1,310nm	27	-	-		
Power Supply Current	I _{SS}	-	-	110	130	mA	
Power Supply Voltage	V _{SS}	-	-5.46	-5.20	-4.94	V	
Thermistor Resistance	R _{th}	-	9.5	10.0	10.5	kΩ	
Thermistor B Constant	B	-	3800	3900	4000	K	

Note 1: Γ=ΔVB/dTc


Note: All the parameters are measured with 50Ω load through external coupling capacitor.

InGaAs-APD/Preamp _____ FRM5N141GT
Receiver

Notes

FRM5N141GT

InGaAs-APD/Preamp Receiver

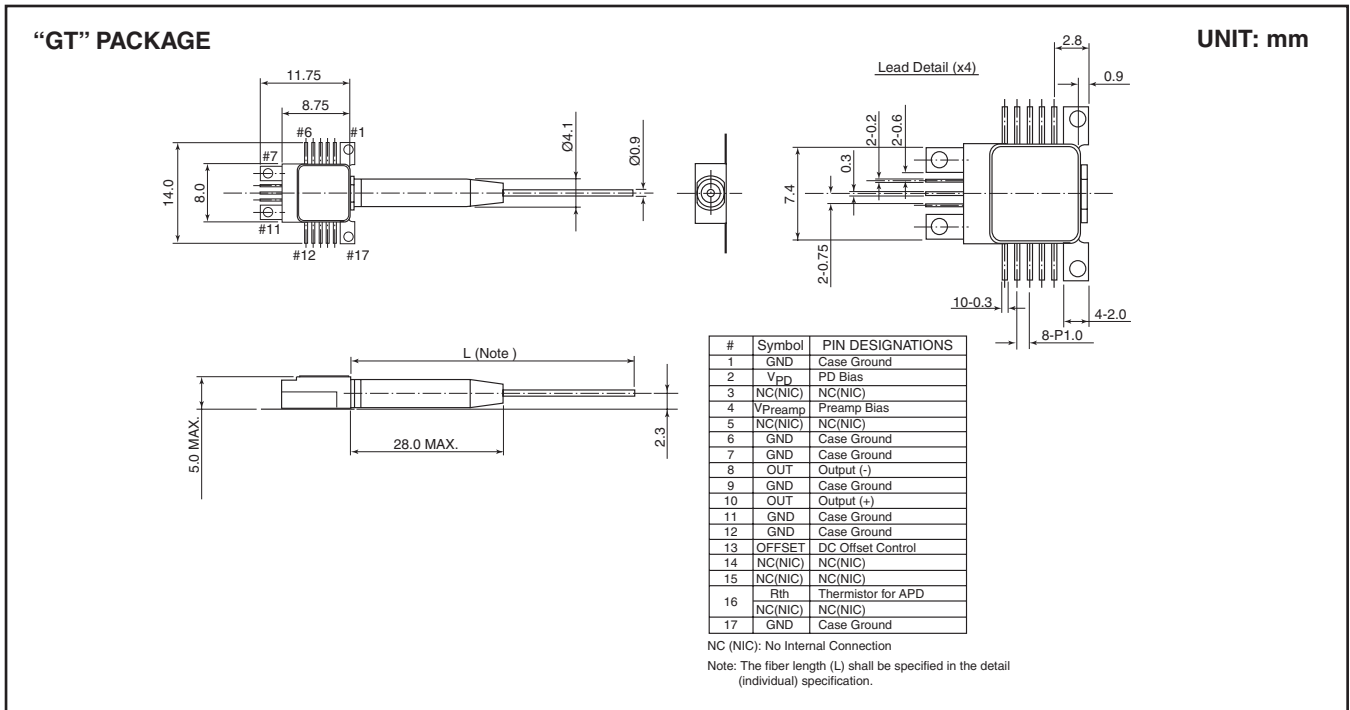

For further information please contact:

Eudyna Devices USA Inc.

2355 Zanker Rd.
 San Jose, CA 95131-1138, U.S.A.
 TEL: (408) 232-9500
 FAX: (408) 428-9111
www.us.eudyna.com

Eudyna Devices Europe Ltd.

Network House
 Norreys Drive
 Maidenhead, Berkshire SL6 4FJ
 United Kingdom
 TEL: +44 (0) 1628 504800
 FAX: +44 (0) 1628 504888

Eudyna Devices Asia Pte Ltd.

Hong Kong Branch
 Rm. 1101, Ocean Centre, 5 Canton Rd.
 Tsim Sha Tsui, Kowloon, Hong Kong
 TEL: +852-2377-0227
 FAX: +852-2377-3921

Eudyna Devices Inc.

Sales Division
 1, Kanai-cho, Sakae-ku
 Yokohama, 244-0845, Japan
 TEL: +81-45-853-8156
 FAX: +81-45-853-8170

CAUTION

Eudyna Devices Inc. products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put this product into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Eudyna Devices Inc. reserves the right to change products and specifications without notice. The information does not convey any license under rights of Eudyna Devices Inc. or others.

© 2004 Eudyna Devices USA Inc.
 Printed in U.S.A.