EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet

Chip LED with Right Angle Lens

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions

- The 12-21C SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.


Device Selection Guide

	C		
Part No.	Material	Emitted Color	Lens Color
12-21C/Y2C-AQ1R1B/2C	AlGaInP	Brilliant Yellow	Water Clear






Package Outline Dimensions

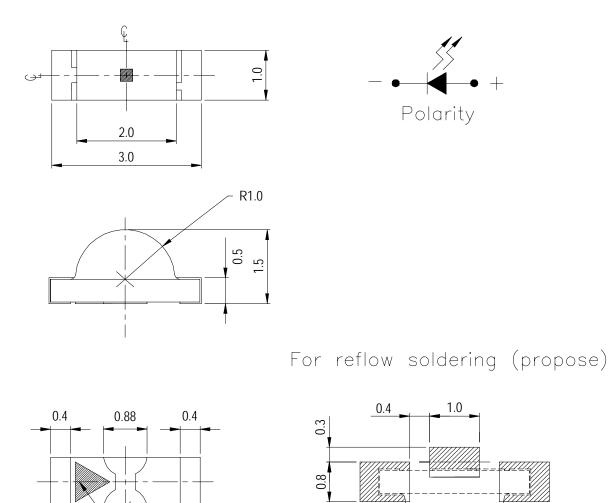





R0.4

Cathode Mark

Everlight Electronics Co., Ltd. Device No. : DSE-12C-Y01 http://www.everlight.com Prepared date: 01-Dec-2005 1.0

1.8

1.0

EVERLIGHT ELECTRONICS CO.,LTD.

12-21C/Y2C-AP1R1B/2C

Absolute Maximum Ratings (Ta=25°C)

ÆRLIGHT

	- 8 ~ (- •• -	••••			
Parameter	Symb	ool	Rating		Unit
Reverse Voltage	VR		5		V
Forward Current	IF		25		mA
Operating Temperature	Тор	r	-40 ~ -	+85	°C
Storage Temperature	Tstg	5	-40 ~ -	+90	°C
Soldering Temperature	Tso	1	260 (for 5 seconds)		°C
Electrostatic Discharge (HBM) ESE	2000		V	
Power Dissipation	Dissipation Pd 60			mW	
Peak Forward Current (Duty 1/10 @1KHz)	Ifp		60		mA
Soldering Temperature	Tso	1	Reflow Soldering : $260 \degree C$ for $10 \degree s$ Hand Soldering : $350 \degree C$ for 3 sec.		
Electro-Optical Characteristics (Ta=25°C)					
D (Several al	M	True	Mar	T Ind	Condition

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	45.0		140.0	mcd	
Peak Wavelength	λp		591		nm	
Dominant Wavelength	λd	585.5		594.5	nm	L 20 A
Spectrum Radiation Bandwidth	$ riangle \lambda$		20		nm	IF=20mA
Viewing Angle	2 0 1/2		100		deg	
Forward Voltage	VF	1.75		2.35	V	
Reverse Current	IR			50	μA	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. Device No. : DSE-12C-Y01 http://www.everlight.com Prepared date: 01-Dec-2005 EVERLIGHT ELECTRONICS CO.,LTD.

12-21C/Y2C-AP1R1B/2C

Bin Range Of Dom. Wavelength

ÆRLIGHT

Group	Bin	Min	Max	Unit	Condition
	D3	585.5	588.5	nm	IF=20mA
А	D4	588.5	591.5		
	D5	591.5	594.5		

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
P1	45.0	57.0		
P2	57.0	72.0		
Q1	72.0	90.0	mcd	IF=20mA
Q2	90.0	112.0		
R1	112.0	140.0		

Bin Range Of Forward Voltage

Bin	Min	Max	Unit	Condition
0	1.75	1.95		
1	1.95	2.15	V	IF=20mA
2	2.15	2.35		

Notes:

1.Tolerance of Luminous Intensity $\pm 10\%$

2.Tolerance of Dominant Wavelength ±1nm


3.Tolerance of Forward Voltage ±0.1V

EVERLIGHT ELECTRONICS CO., LTD.

12-21C/Y2C-AP1R1B/2C

Typical Electro-Optical Characteristics Curves

ÆRLIGHT

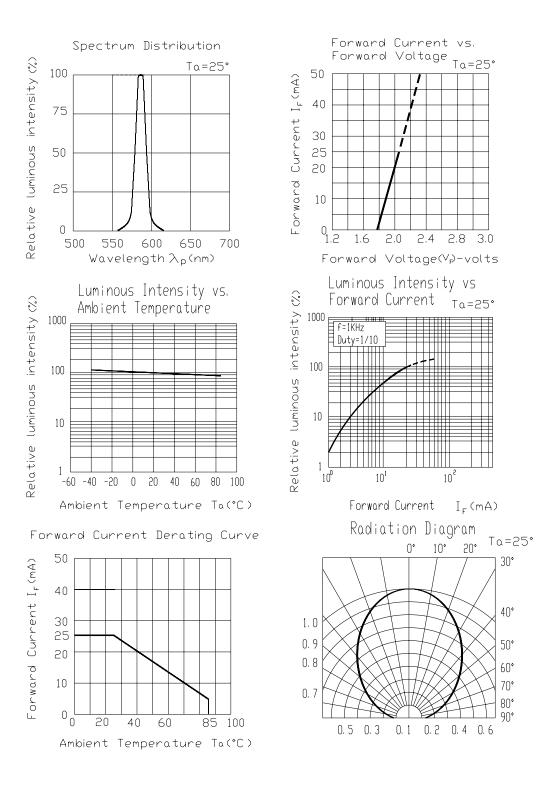


Everlight Electronics Co., Ltd. Device No. : DSE-12C-Y01 http://www.everlight.com Prepared date: 01-Dec-2005 Rev.1 Page: 5 of 10 Prepared by: Jessica Chang

Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**



Reel Dimensions

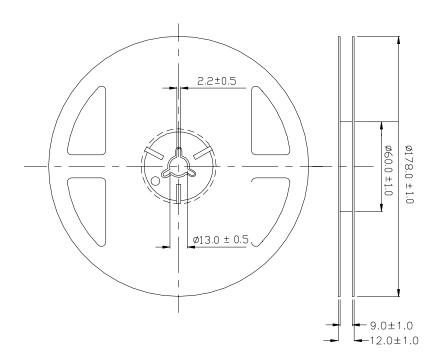


Note: The tolerances unless mentioned is ± 0.1 mm , Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-12C-Y01 http://www.everlight.com Prepared date: 01-Dec-2005 Rev.1 Page: 6 of 10 Prepared by: Jessica Chang

EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


12-21C/Y2C-AP1R1B/2C

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

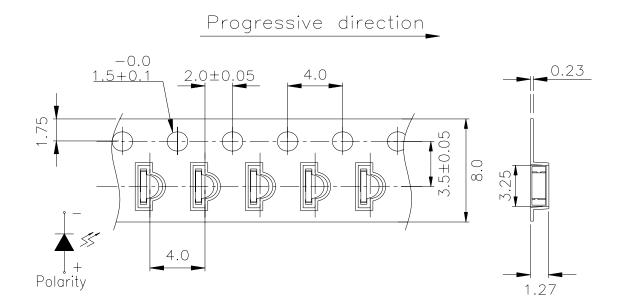

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging

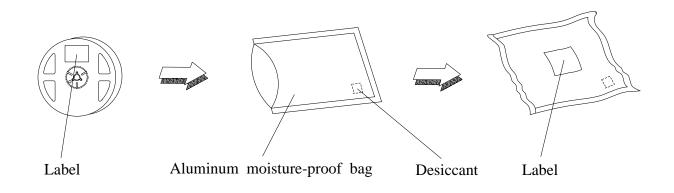

http://www.everlight.com Prepared date: 01-Dec-2005 EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

12-21C/Y2C-AP1R1B/2C

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD : 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min $\int 5 \min$ L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

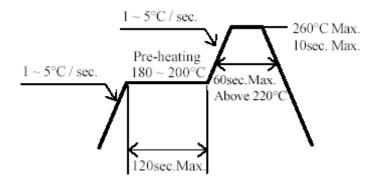


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

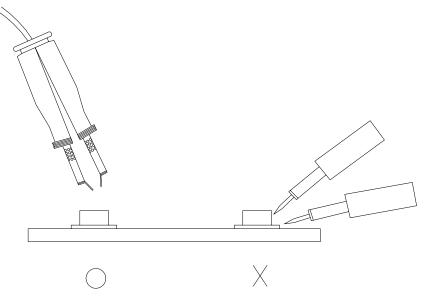

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. : DSE-12C-Y01 http://www.everlight.com Prepared date: 01-Dec-2005 Rev.1 Page: 10 of 10 Prepared by: Jessica Chang