


CMOS SMD $7 \times 5 \times 1.8$ mm, 6 pad

50.1MHz ~ 200.0MHz

- Frequency range 50.01MHz to 200MHz
- **LVCMOS Output**
- **Supply Voltage 3.3 VDC**
- High Q fundamental mode crystal
- Low jitter multiplier circuit
- Low unit cost






DESCRIPTION

GV576 VCXOs, are packaged in an industry-standard, 6 pad, 7mm x 5mm SMD package. The VCXO incorporates a high Q fundamental mode crystal and a low jitter multiplier circuit.

SPECIFICATION

Frequency Range:	50.01MHz to 200.0MHz	
Supply Voltage:	3.3 VDC ±5%	
Output Logic:	LVCMOS	
Integrated Phase Jitter:	2.3ps typical, 4.0ps maximum (for 155.250MHz)	
Period Jitter RMS:	4.0ps typical (for 155.250MHz)	
Period Jitter Peak to peak:	27.0ps typical (for 155.250MHz)	
Phase Noise:	See table below	
Initial Frequency Accuracy:	Tune to the nominal frequency with $Vc = 1.65 \pm 0.2VDC$	
Output Voltage HIGH (1):	90% Vdd minimum	
Output Voltage LOW (0):	10% Vdd maximum	
Pulling Range:	From ±30ppm to ±150ppm	
Temperature Stability:	See table	
Output Load:	15pF	
Start-up Time:	10ms maximum, 5ms typical	
Duty Cycle:	50% ±5% measured at 50% Vdd	
Rise/Fall Times:	1.2ns typical (15pF load)	
Current Consumption:	25mA maximum (15pF load)	
Linearity:	10% maximum, 6% typical	
Modulation Bandwidth:	25kHz minimum	
Input Impedance:	2 MΩ minimum	
Slope Polarity: (Transfer function)	Monotonic and Positive. (An increase of control voltage	
,	always increases output	
	frequency.)	
Storage Temperature:	-50° to +100°C	
Ageing:	±5ppm per year maximum	
Enable/Disable (Tristate):	Pads 2 or 5, Enable high or 70% Vdd min applied to Tri-state pad to enable output. 30% Vdd max. to disable output (high impedance)	
RoHS Status:	Fully compliant	

OUTLINE & DIMENSIONS

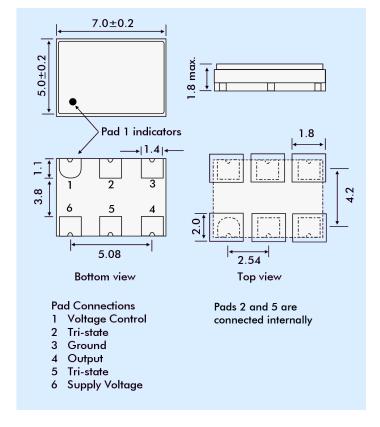

PHASE NOISE

Offset	Frequency 155.25MHz
10Hz	-65dBc/Hz
100Hz	-95dBc/Hz
1kHz	-120dBc/Hz
10kHz	-128dBc/Hz
100kHz	-122dBc/Hz
1MHz	-120dBc/Hz
10MHz	-140dBc/Hz

FREQUENCY STABILITY

Stability Code	Stability ±ppm	Temp. Range
Α	25	0°∼+70°C
В	50	0°∼+70°C
С	100	0°∼+70°C
D	25	-40°∼+85°C
Е	50	-40°∼+85°C
F	100	-40°∼+85°C

If non-standard frequency stability is required Use 'I' followed by stability, i.e. I20 for ±20ppm

PART NUMBER SCHEDULE

