

SAW Components

Preliminary Data Sheet B4057

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.



SAW Components B4057
Low Loss Filter 1228.0 MHz


PreliminaryData Sheet



Ceramic package DCC6D

Features

- Low loss RF filter for GPS receivers
- Usable passband 20 MHz
- Low insertion attenuation, low amplitude ripple
- Unbalanced to balanced operation
- Ceramic package for Surface Mounted Technology (SMT)

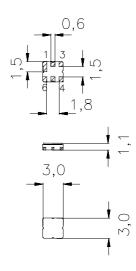


Terminals

Ni, gold-plated

Dimensions in mm, approx. weight 0,037 g

Pin configuration

2	Input, unbalanced
4, 6	Output, balanced
1, 3, 5	To be grounded
1. 3. 5	Case ground



Туре	Ordering code	Marking and Package	Packing		
		according to	according to		
B4057	B39122-B4057-U510	C61157-A7-A68	F61074-V8089-Z000		

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	Τ	-40 / +85	°C	
Storage temperature range	$T_{\rm stg}$	-40 / +85	°C	
DC voltage	$V_{\rm DC}$	0	V	
Source power	P_{S}	0	dBm	source impedance 50 Ω



SAW Components B4057

Low Loss Filter 1228.0 MHz

PreliminaryData Sheet

Characteristics

 $T = -40 \,^{\circ}\text{C} \text{ to } +85 \,^{\circ}\text{C}$ Operating temperature range:

Terminating source impedance:


 $Z_{\rm S} = 50 \ \Omega$ $Z_{\rm L} = 50 \ \Omega$ (balanced) Terminating load impedance:

				min.	typ.	max.	
Center frequency			f _C	_	1228,0	_	MHz
Maximum insertion attenuation			α_{max}				
1218,0	1238,0	MHz		_	3,0	3,5	dB
Amplitude ripple (p-p)		Δα					
1218,0	1238,0	MHz		_	1,0	1,5	dB
Absolute attenuation		α					
0,0	1088,0	MHz		35,0	53,0	_	dB
1088,0	1178,0	MHz		30,0	48,0	_	dB
1178,0	1193,0	MHz		11,0	30,0	_	dB
1263,0	1278,0	MHz		10,0	23,0	_	dB
1278,0	1368,0	MHz		28,0	31,0	_	dB
1368,0	1785,0	MHz		33,0	48,0	_	dB
1785,0	2500,0	MHz		27,0	48,0	_	dB
2500,0	4000,0	MHz		18,0	28,0		dB




SAW Components		B4057
Low Loss Filter		1228.0 MHz
PreliminaryData Sheet	SMD	

Transfer function

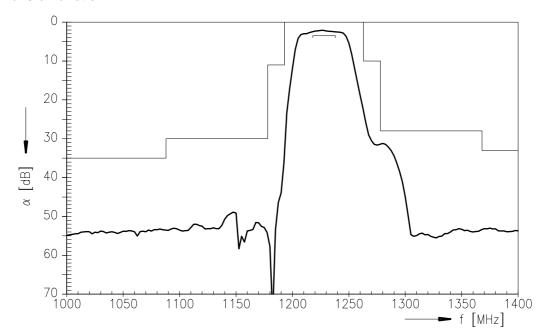

Transfer function (wide band)

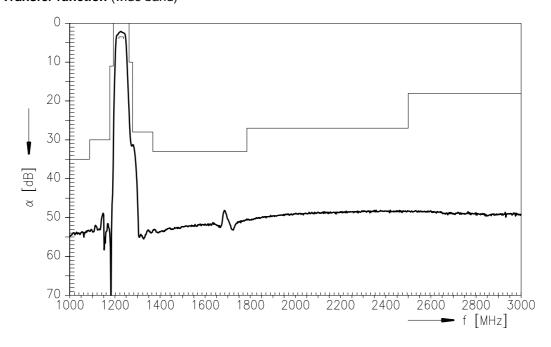



SAW Components B4057
Low Loss Filter 1228.0 MHz

PreliminaryData Sheet

Published by EPCOS AG Surface Acoustic Wave Components Division, SAW MC IS PD WL P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2000. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.