

SANYO	No.2977	2SC4478
	NPN Epitaxial Planar Silicon Transistor High-Definition CRT Display Horizontal Deflection Output Applications	

Features

- Fast switching speed
- Low saturation voltage
- Adoption of MBIT process
- Micaless package facilitating easy mounting

Absolute Maximum Ratings at Ta = 25°C


			unit
Collector-to-Base Voltage	V _{CB0}	400	V
Collector-to-Emitter Voltage	V _{CEO}	200	V
Emitter-to-Base Voltage	V _{EBO}	6	V
Collector Current	I _C	7	A
Peak Collector Current	i _{cp}	12	A
Base Current	I _B	4	A
Collector Dissipation	P _C	2	W
		30	W
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55 to +150	°C

T_C = 25°C

Electrical Characteristics at Ta = 25°C


			min	typ	max	unit
Collector Cutoff Current	I _{CB0}	V _{CB} = 250V, I _E = 0			100	μA
Emitter Cutoff Current	I _{EBO}	V _{EB} = 5V, I _C = 0			100	μA
DC Current Gain	h _{FE} (1)	V _{CE} = 1V, I _C = 1A	15			
	h _{FE} (2)	V _{CE} = 1V, I _C = 5A	10		50	
Gain-Bandwidth Product	f _T	V _{CE} = 10V, I _C = 0.5A	10	40		MHz
C-E Saturation Voltage	V _{CE(sat)}	I _C = 5A, I _B = 0.5A			0.8	V
B-E Saturation Voltage	V _{BE(sat)}	I _C = 5A, I _B = 0.5A			1.5	V
C-B Breakdown Voltage	V _{(BR)CBO}	I _C = 1mA, I _E = 0	400			V
C-E Breakdown Voltage	V _{(BR)CEO}	I _C = 1mA, R _{BE} = ∞	200			V
E-B Breakdown Voltage	V _{(BR)EBO}	I _E = 1mA, I _C = 0	6			V
Fall Time	t _f	(See specified Test Circuit. I _C = 5A, I _{B1} = -I _{B2} = 0.5A)			0.3	μs

Switching Time Test Circuit

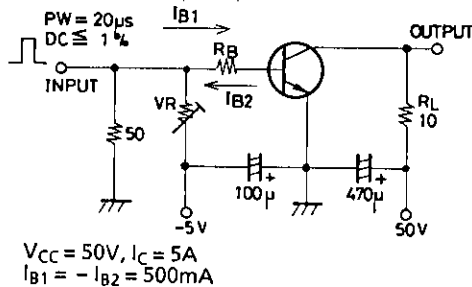









Package Dimensions 2041


(unit : mm)

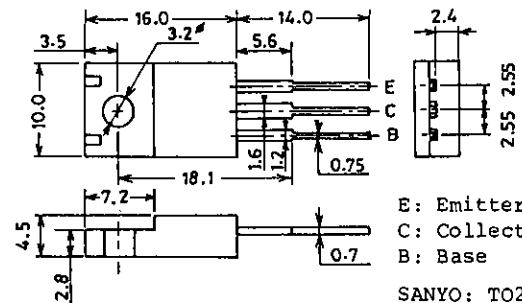

E: Emitter
C: Collector
B: Base

SANYO: TO220ML

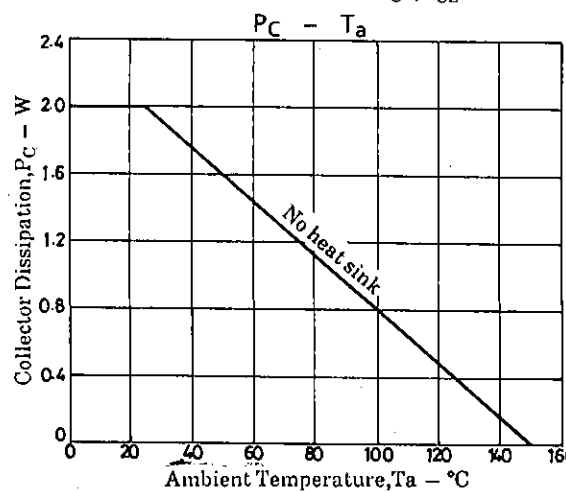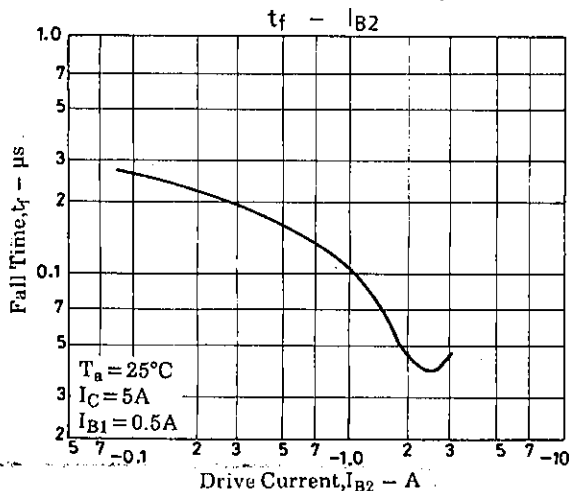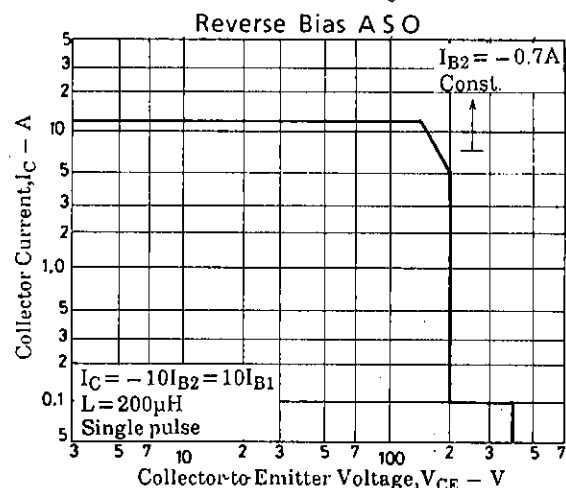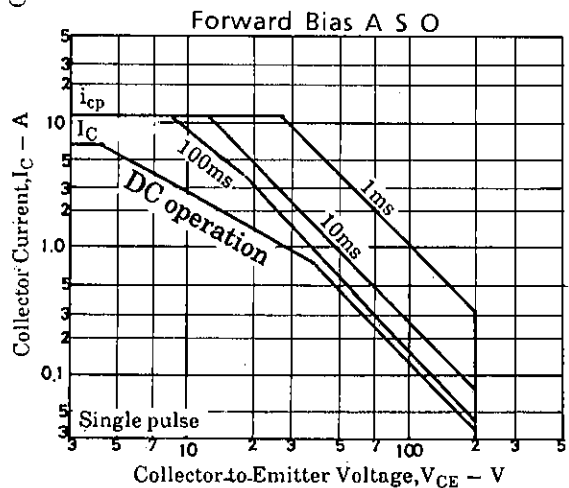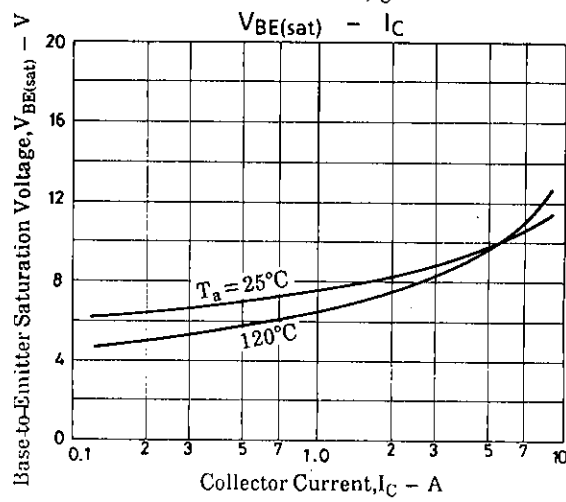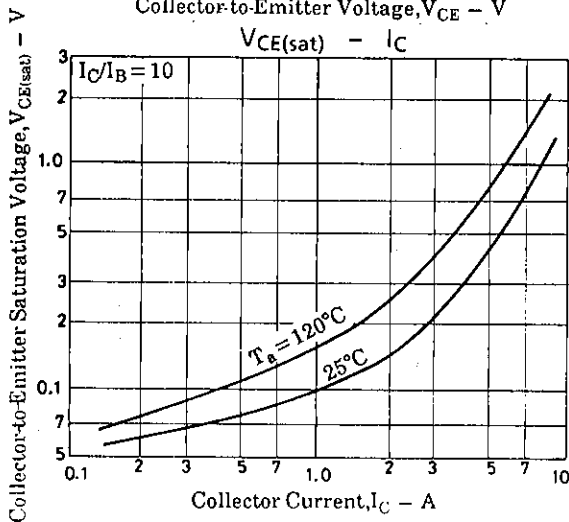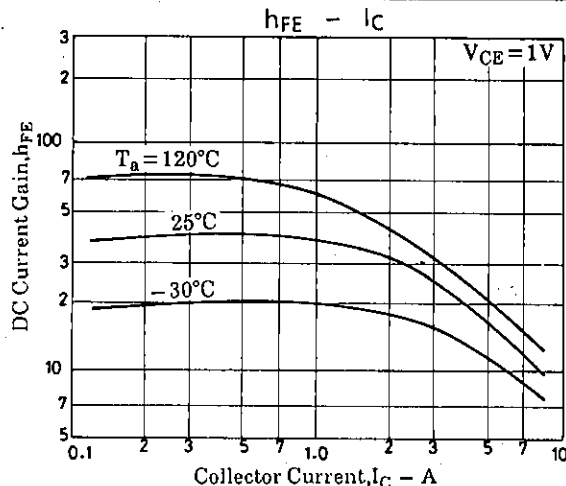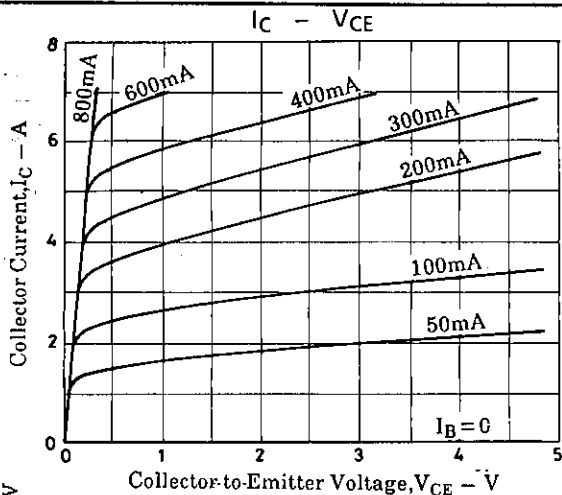

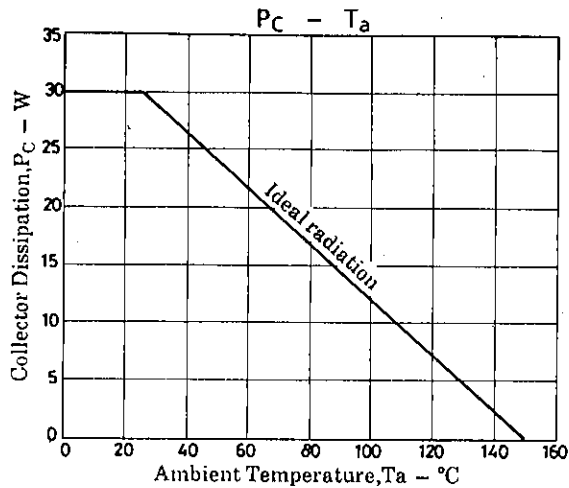

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.