




JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

Digital transistors (built-in resistors)

DTC144EE/DTC144EUA /DTC144ECA/DTC144EKA/DTC144ESA

DIGITAL TRANSISTOR (NPN)

●Equivalent circuit

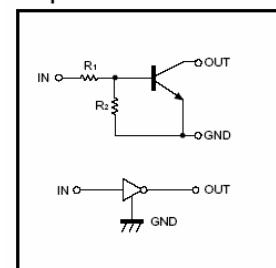


FEATURES

1. Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit).
2. The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
3. Only the on/off conditions need to be set for operation, making device design easy.

PIN CONNECTIONS AND MARKING

DTC144EE




1.IN
2.GND
3.OUT

SOT-523

Addreviated symbol: 26

DTC144EUA




1.IN
2.GND
3.OUT

SOT-323

Addreviated symbol: 26

DTC144EKA




1.IN
2.GND
3.OUT

SOT-23-3L

Addreviated symbol: 26

DTC144ECA




1.IN
2.GND
3.OUT

SOT-23

Addreviated symbol: 26

DTC144ESA

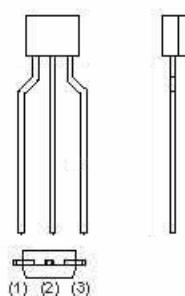

1.GND
2.OUT
3.IN

TO-92S

Absolute maximum ratings(Ta=25°C)

Parameter	Symbol	Limits (DTC144E□)					Unit				
		E	UA	CA	KA	SA					
Collector-base voltage	V _{(BR)CBO}	50					V				
Collector-emitter voltage	V _{(BR)CEO}	50					V				
Emitter-base voltage	V _{(BR)EBO}	5					V				
Collector current	I _C	100					mA				
Collector Power dissipation	P _C	150	200		300		mW				
Junction temperature	T _j	150					°C				
Storage temperature	T _{stg}	-55~150					°C				

Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ	Max.	Unit	Conditions
Input voltage	V _{I(off)}			0.5	V	V _{CC} =5V ,I _O =100μA
	V _{I(on)}	3				V _O =0.3V ,I _O =2mA
Output voltage	V _{O(on)}			0.3	V	I _O /I=10mA/0.5mA
Input current	I _I			0.18	mA	V _I =5V
Output current	I _{O(off)}			0.5	μA	V _{CC} =50V ,V _I =0
DC current gain	G _I	68				V _O =5V ,I _O =5mA
Input resistance	R _I	32.9	47	61.1	KΩ	
Resistance ratio	R ₂ /R ₁	0.8	1	1.2		
Transition frequency	f _T		250		MHz	V _O =10V ,I _O =5mA,f=100MHz

Typical Characteristics

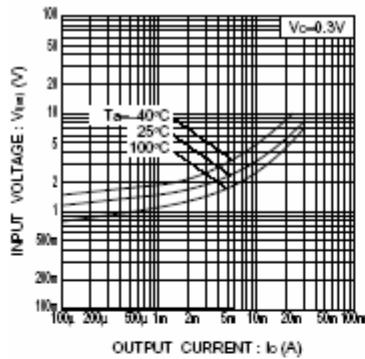


Fig.1 Input voltage vs. output current
(ON characteristics)

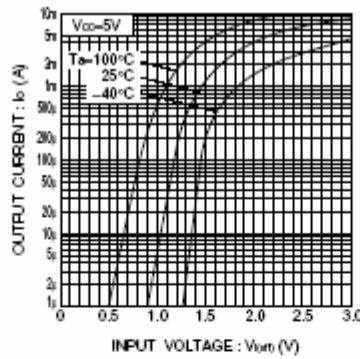


Fig.2 Output current vs. input voltage
(OFF characteristics)

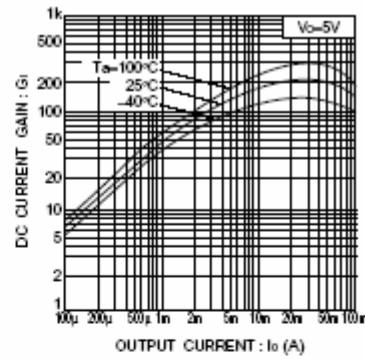


Fig.3 DC current gain vs. output current

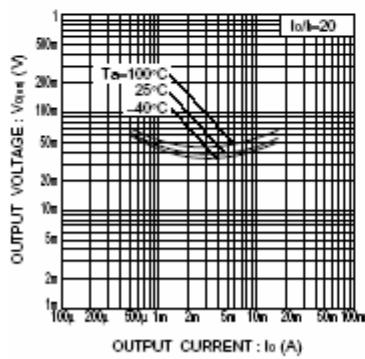


Fig.4 Output voltage vs. output current