




PIN	SYMBOL	PIN	SYMBOL
1	NC	16	VSS
2	CS1	17	VBLT
3	RES	18	CAP3-
4	A0	19	CAP1+
5	VR	20	CAP1-
6	RD	21	CAP2-
7	DD	22	CAP2+
8	D1	23	V1
9	D2	24	V2
10	D3	25	V3
11	D4	26	V4
12	D5	27	V5
13	D6	28	V6
14	D7	29	C86
15	VDD	30	IR5

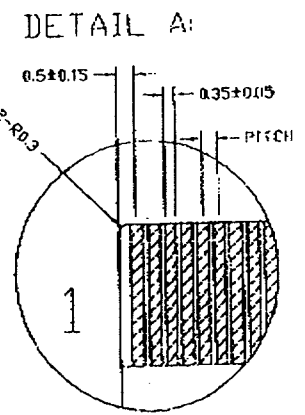

- NOTES:
- |                                     |                       |
|-------------------------------------|-----------------------|
| 1. DISPLAY TYPE:                    | STN/BLUE MODE         |
| 2. VIEWING DIRECTION:               | 6:00                  |
| 3. POLARIZER MODE:                  | TRANSMISSIVE/NEGATIVE |
| 4. DRIVE METHOD:                    | 1/65 DUTY 1/7 BIAS    |
| 5. LCD OPERATING VOLTAGE:           | 8.9V                  |
| 6. VDD:                             | 5.0V                  |
| 7. OPERATING TEMP.:                 | -20°C~+70°C           |
| 8. STORAGE TEMP.:                   | -30°C~+80°C           |
| 9. CONTROLLER:                      | S(D)S605D11B          |
| 10. WITH LED BACKLIGHT(WHITE, 5.0V) |                       |
| 11. CONNECTOR:                      | FPC                   |
| 12. UNMARKED TOLERANCE:             | ±0.3mm                |
| 13. USED LCD:                       | TJCGS-195A            |

		<b>TIAN-MA MICROELECTRONICS</b>	
22/F., HANGDU Building, Shennan Road, Central, Sh			
DRAWN BY:	古晓娟 2018-03	TITLE:	TM12864A2FFWG
CHECKED BY:	李松 2018-03	DWG NO:	G-1
APPROVED BY:	李松	DWG NAME:	TM12864A2FFWG-1.DWG
CONFIRMED BY:			