

**Construction**

- Double-aperture core DL 3,6
- 6 gullwing terminals
- With large terminal carrier, for dimensions [see page 60](#)
- Cover cap upon request, for dimensions [see page 59](#)

**Features**

- Small size
- Minimum phase shift
- Very low losses

**Applications**

- Universal impedance converter 1 : 4 for modulators with TDA5666, TDA5667, MGM3000
- Mixer

**Packing**



- 12-mm blister tape
- Packing unit: 2100 pcs.

**Ordering code**


B78408-B1087-A3

**Transformation ratio**


$$N_1 : N_2 : N_3 = 2 : 2 : 2$$



FIN0023-R

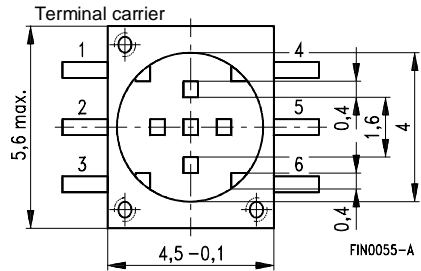


FIN0055-A



FIN0018-R

**Recommended pad arrangement**

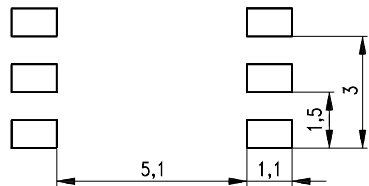

FUS0087-5

**Technical data** (typical values)

Frequency(MHz)	10	47	100	180
Insertion loss(dB) (back-to-back)	< 5,0	< 4,5	< 4,8	< 5,0

Losses versus frequency

