



RF Manual 7th edition

Application and design manual for RF products

November 2005

PHILIPS



Henk Roelofs, Vice President & General Manager RF Products

Introduction

Welcome to the 7th edition of our RF Manual. We knew that the new focus of application-based information with fully interactive operation would pay off, but the appreciation expressed by our customers for the 6th edition of the RF Manual surprised even us. Thank you for your comments.

We are maintaining our RF Manual as a dynamic source of information. We have committed to updating the document twice a year to keep you informed of important developments for your applications.

Design-in tools

Chapter 3 is completely new. It includes design-in tools like S-Parameters, Spice models and demo boards. We have added this chapter to make it easier to find and get hold of design-in information and materials. There are web links or references to the Philips representative / authorized distributor.

NEW: BAW, Satellite, TIAs

In the 6th edition, we touched upon our BAW developments. In this edition we go much deeper to show you our BAW offerings and characteristics (Chapter 5).

RF Manual web page

http://www.philips.semiconductors.com/markets/mms/products/discretes/documentation/rf_manual

RF Products, marketing team

Karine Bouffard, Ruud van den Brink, Wil Konings, Kausik Mandal, Jos Peters, Pierre Ricard, Ronald Thissen, Joeri Voets, Jos Zeelen

The chapter on satellite outdoor units (LNB) is completely new. We have a complete portfolio to offer you one-stop shopping for LNB design (Chapter 6). Also completely new is a chapter on TIAs, digital fibre optic receiver modules for telecom, data networks and FTTx systems (Chapter 7).

RF Manual 7th edition APPENDIX

The appendix contains two new chapters to help designers on particular items: thermal design considerations on SMD discretes, and designing with the TZA 30x6 TIAs. The appendix is downloadable via the RF Manual web page, see link below.

Interactive

Simply 'clicking' on a product type takes you directly to the corresponding product information page on the Philips Semiconductor website.

Contents

| | |
|--|-----------|
| 1. Applications, recommended products and application notes | 6 |
| 1.1 Low-cost cellular phone front-end for ODM/CEM designs | 6 |
| 1.2 2.4 GHz front-end for WLAN, Bluetooth™, DECT, ZigBee™, etc. | 8 |
| 1.3 Low Noise Block (LNB) | 9 |
| 1.4 Global Positioning System (GPS) | 10 |
| 1.5 TV / VCR / DVD tuning | 11 |
| 1.6 Car Radio Receiver (CREST IC's: TEF6860HL, TEF6862HL) | 12 |
| 1.7 CATV Electrical (Line Extenders) | 13 |
| 1.8 CATV Optical (Optical Nodes) | 14 |
| 1.9 Optical Networking (SFF/SFP modules) | 15 |
| 2. Product Portfolio | 16 |
| 2.1 New products | 16 |
| 2.2 RF diodes | 17 |
| 2.2.1 Varicap diodes | 17 |
| 2.2.2 Pin diodes | 19 |
| 2.2.3 Band-switch diodes | 19 |
| 2.2.4 Schottky diodes | 20 |
| 2.3 RF Bipolar transistors | 21 |
| 2.3.1 Wideband transistors | 21 |
| 2.4 RF ICs | 23 |
| 2.4.1 MMICs | 23 |
| 2.5 RF MOS transistors | 24 |
| 2.5.1 JFETs | 24 |
| 2.5.2 MOSFETs | 26 |
| 2.6 RF Modules | 28 |
| 2.6.1 CATV Reverse Hybrids | 28 |
| 2.6.2 CATV Push-Pulls | 28 |
| 2.6.3 CATV Power Doublers | 29 |
| 2.6.4 CATV Optical Receivers | 29 |
| 2.7 Fibre-optic transceiver ICs | 30 |
| 2.7.1 Laser Drivers | 30 |
| 2.7.2 Trans Impedance Amplifiers | 30 |
| 3. Design-in tools | 31 |
| 3.1 S-Parameters | 31 |
| 3.1.1 Wideband transistors & MMICs | 31 |
| 3.2 Spice models | 31 |
| 3.2.1 Wideband transistors | 31 |
| 3.2.2 Field effect transistors | 32 |
| 3.2.3 Varicap diodes | 32 |
| 3.3 Application notes | 32 |
| 3.4 Demo boards | 32 |
| 3.5 Samples of products in development | 32 |
| 3.6 Samples of released products | 32 |
| 3.7 Datasheets | 32 |
| 3.8 Design-in support | 32 |

| | |
|---|-----------|
| 4. Cross-references & Replacements | 33 |
| 4.1 Cross-references: Manufacturer types versus Philips types | 33 |
| 4.2 Cross-references: Philips discontinued types versus Philips replacement types | 33 |
| 5. High performance miniature BAW filters and duplexers | 15 |
| 6. Satellite outdoor unit (LNB) | 38 |
| 7. TZA30x6 | 39 |
| 8. Contacts and Web Links | 40 |

1. Applications, recommended products and application notes

Philips RF Applications

<http://www.semiconductors.philips.com/markets/mms/applications/index.html>

Philips Application notes

http://www.semiconductors.philips.com/markets/mms/documentation/app_notes/

Philips Application notes MMIC's


http://www.semiconductors.philips.com/markets/mms/products/discretes/documentation/mmic_amplifiers_mixers/

Philips Application notes transistors

<http://www.semiconductors.philips.com/markets/mms/products/discretes/documentation/transistors/>

1.1 Low-cost cellular phone front-end for ODM/CEM designs

Application diagram

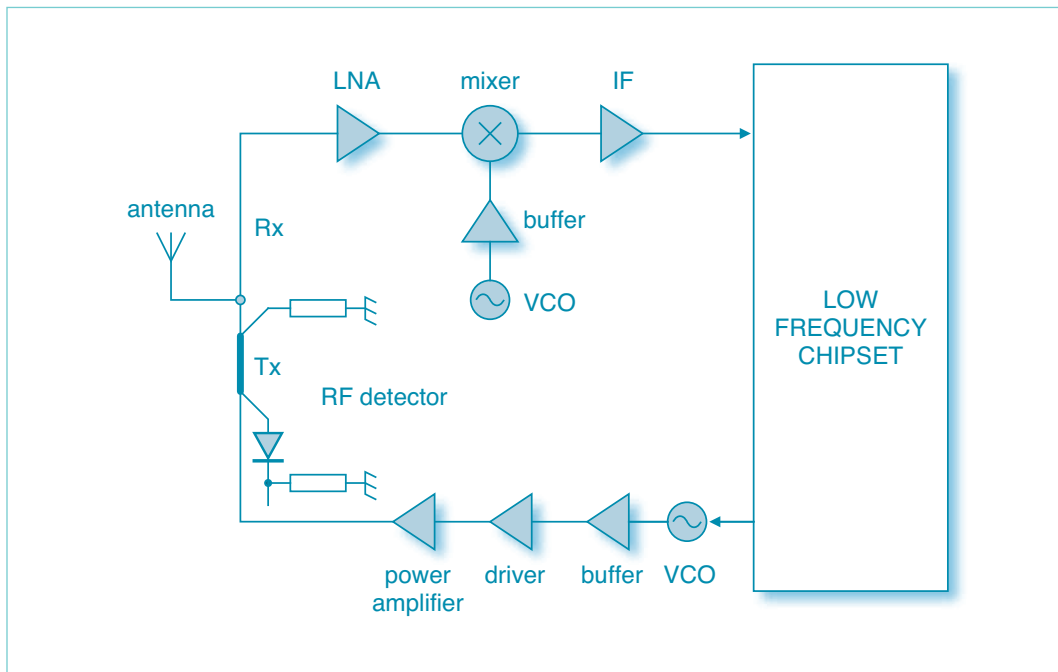

Recommended products

| Function | Product | | Package | Type |
|-------------|-------------------|-----------------|---------|--------|
| RF detector | RF Schottky diode | Low Cd Schottky | various | xxSB17 |
| | | | various | xxSB62 |
| | | | various | xxSB63 |
| | | | various | xxSB82 |

| Function | Product | | Package | Type |
|----------------|----------|-----------|---------|---------|
| Antenna switch | RF diode | PIN diode | various | BAP50 |
| | | | various | BAP51 |
| | | | various | BAP55 |
| | | | various | BAP63 |
| | | | various | BAP64 |
| | | | various | BAP65 |
| | | | various | BAP1321 |

| Function | Product | | Package | Type |
|----------|---------|------------------------------|---------|---------|
| LNA | MMIC | Low noise wideband amplifier | SOT343R | BGA2001 |
| | | | SOT343R | BGA2003 |
| | | | SOT363 | BGA2004 |
| | | | SOT363 | BGA2011 |
| | | | SOT363 | BGA2012 |

| Function | Product | | Package | Type |
|----------|-----------------------|---------------------|---------|---------|
| Mixer | RF bipolar transistor | wideband transistor | SOT343 | BFG410W |
| | | | SOT343 | BFG425W |
| | | | SOT343 | BFG480W |
| | MMIC | Linear mixer | SOT363 | BGA2022 |

| Function | Product | | Package | Type |
|----------|-----------------------|------------------------|---------|---------|
| IF | MMIC | Low noise amplifier | SOT343R | BGA2001 |
| | | | SOT343R | BGA2003 |
| | | Gen. purpose amplifier | SOT363 | BGA2771 |
| | | | SOT363 | BGA2776 |
| | RF bipolar transistor | wideband transistor | SOT363 | PRF949 |
| | | | SOT363 | BFS17W |

| Function | Product | | Package | Type |
|----------|-----------------------|---------------------|---------|---------|
| Buffer | RF bipolar transistor | wideband transistor | SOT343 | BFG410W |
| | | | SOT343 | BFG425W |
| | | | SOT343 | BFG480W |
| | | | SOT23 | BFR520T |
| | | | SOT416 | BFR505T |
| | | | SOT323 | BFS540 |

| Function | Product | | Package | Type |
|----------|----------------|--------------------|---------|--------|
| VCO | Varicap diodes | VCO varicap diodes | SOD523 | BB141 |
| | | | SOD523 | BB142 |
| | | | SOD523 | BB143 |
| | | | SOD523 | BB145 |
| | | | SOD523 | BB145B |
| | | | SOD523 | BB149 |

| Function | Product | | Package | Type |
|----------|--------------------|-----------------------------|---------|-----------|
| Driver | Bipolar transistor | wideband transistor | SOT343 | BFG21W |
| | | | SOT343 | BFG425W |
| | | | SOT343 | BFG480W |
| | MMIC | amplifier* | SOT363 | BGA2031/1 |
| | | Gen. purpose wideband ampl. | SOT363 | BGA2771 |
| | | | SOT363 | BGA2776 |

| Function | Product | | Package | Type |
|-----------------|--------------------|-----------------------------|---------|-----------|
| Power amplifier | Bipolar transistor | wideband transistor | SOT343 | BFG21W |
| | | | SOT343 | BFG480W |
| | MMIC | amplifier * | SOT363 | BGA2031/1 |
| | | Gen. purpose wideband ampl. | SOT363 | BGA2771 |
| | | | SOT363 | BGA2776 |


ad* = 2 stage variable gain linear amplifier

Recommended application notes

| | |
|---|-------------------------|
| 1880MHz PA driver | BFG21W |
| 1880MHz PA driver | BFG480W |
| 2GHz LNA | BFG410W |
| 2GHz LNA | BFG425W |
| 800MHz PA driver | BFG21W |
| 900MHz driver | BFG480W |
| 900MHz LNA | BFG410W |
| 900MHz LNA | BFG480W |
| CDMA cellular VCO | BFG425W, BFG410W, BB142 |
| Demoboard 900MHz LNA | BGA2003 |
| Demoboard for BGA2001 | BGA2001 |
| Demoboard for W-CDMA | BGA2003 |
| High IP3 MMIC LNA at 1.8 - 2.4 GHz | BGA2012 |
| High IP3 MMIC LNA at 900MHz | BGA2011 |
| Power amplifier for 1.9GHz DECT and PHS | BFG425W, BFG21W |
| Rx mixer for 2450MHz | BGA2022 |
| Ultra LNA's for 900&2000MHz with high IP3 | BFG410W, BFG425W |

1.2 2.4 GHz front-end for WLAN, Bluetooth™, DECT, ZigBee™, etc.

Application diagram

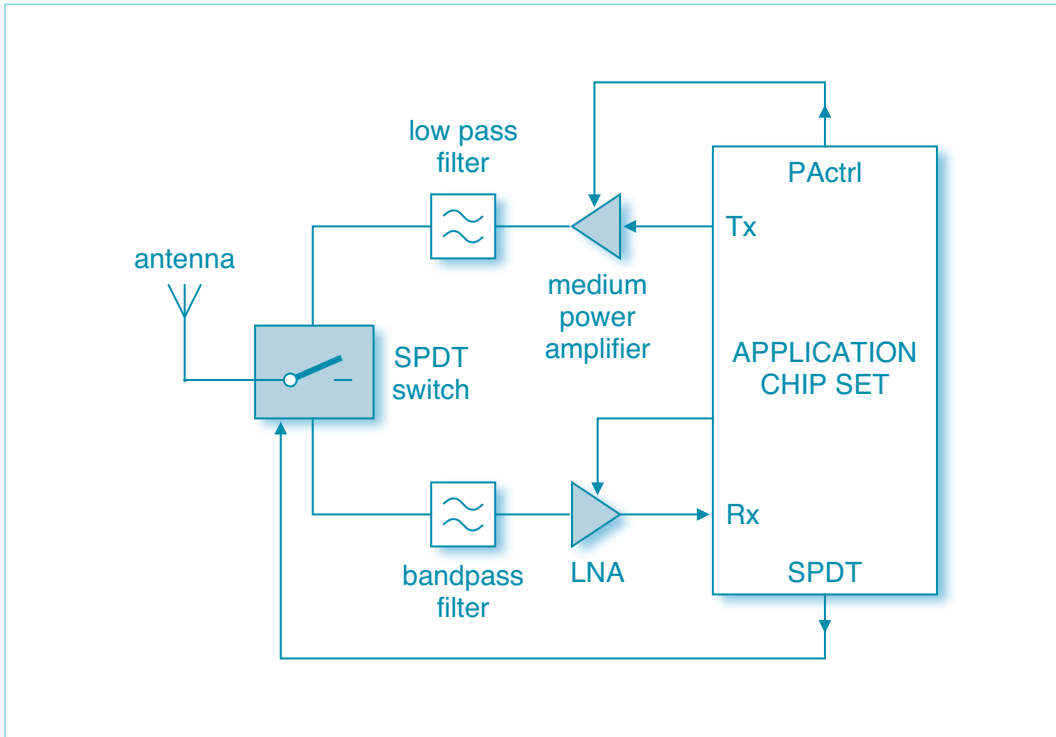

Recommended products

| Function | Product | | Package | Type |
|-------------|----------|-----------|---------|----------|
| SPDT Switch | RF diode | Pin diode | SOD523 | BAP51-02 |
| | | | SOD882T | BAP51LX |
| | | | SOD882T | BAP55LX |

| Function | Product | | Package | Type |
|------------------------|---------|-----------------------------------|---------|---------|
| Medium power amplifier | MMIC | Gen. purpose med. power amplifier | SOT89 | BGA6589 |


| Function | Product | | Package | Type |
|----------|---------|------------------------|---------|---------|
| LNA | MMIC | Low noise WB amplifier | SOT343R | BGA2003 |
| | | | SOT343R | BGA2001 |

Recommended application notes

| | |
|----------------------------|----------|
| 2.45 Ghz T/R, RF switch | BAP51-02 |
| Low-impedance PIN diode | BAP50-05 |
| Demoboard 900 MHz LNA | BGA2003 |
| Demoboard for 900&1800 MHz | BGA2001 |
| Demoboard for W-CDMA | BGA2003 |

1.3 Low Noise Block (LNB)

Application diagram

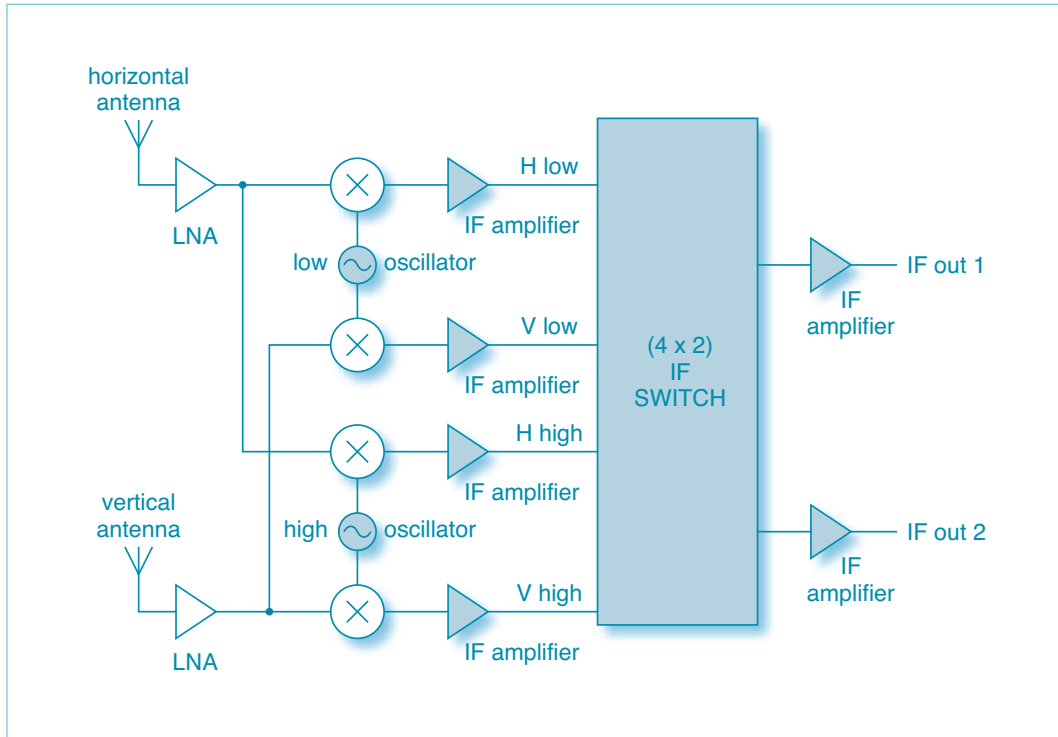

Recommended products

| Function | Product | Package | Type |
|------------|-----------------------|---------------------|-----------------|
| Oscillator | RF bipolar transistor | wideband transistor | SOT343 BFG424W |
| | | | SOT343F BFG424F |

| Function | Product | Package | Type |
|-----------|----------|-----------|-----------------|
| IF switch | RF diode | PIN diode | various BAP64 |
| | | | various BAP51 |
| | | | various BAP1321 |
| | | | various BAP50 |
| | | | various BAP63 |

| Function | Product | Package | Type |
|------------------------|-----------------------|---------------------------|-----------------|
| 1st stage IF amplifier | MMIC | General purpose amplifier | SOT363 BGA2711 |
| | | | SOT363 BGA2712 |
| | | | SOT363 BGA2748 |
| | | | SOT363 BGA2715 |
| | | | SOT363 BGA2717 |
| | RF bipolar transistor | wideband transistor | SOT343 BFG424W |
| | | | SOT343F BFG424F |


| Function | Product | Package | Type |
|---------------------------|-----------------------|------------------------|----------------|
| Output stage IF amplifier | MMIC | Gen. purpose amplifier | SOT363 BGA2709 |
| | | | SOT363 BGA2776 |
| | | | SOT363 BGM1014 |
| | | | SOT363 BGM1012 |
| | | | SOT363 BGA2716 |
| | RF bipolar transistor | wideband transistor | SOT343 BFG325 |

Recommended application notes

| | |
|-------------------------|----------|
| 2.45Ghz T/R, RF Switch | BAP51-02 |
| Low-impedance PIN diode | BAP50-05 |

1.4 Global Positioning System (GPS)

Application diagram

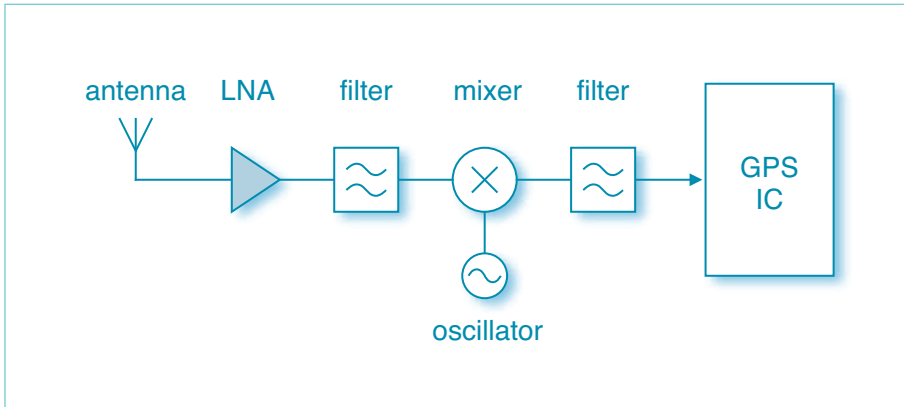

Recommended products

| Function | Product | | Package | Type |
|----------|-----------------------|------------------------------------|---------|---------|
| LNA | RF bipolar transistor | Wideband transistor | SOT343 | BFG425W |
| | | | SOT343 | BFG410W |
| | MMIC | Low noise wideband amplifier | SOT343R | BGA2001 |
| | | | SOT343R | BGA2003 |
| | | General purpose wideband amplifier | SOT363 | BGM1013 |
| | | | SOT363 | BGM1011 |
| | | | SOT363 | BGA2715 |
| | | | SOT363 | BGA2748 |


Recommended application notes

| | |
|--------------------------------------|------------------|
| Introduction into the GPS front-end* | BGAx, BGMx, BGUx |
| 900 MHz LNA | BFG410W |
| 2 GHz LNA | BFG410W |
| 2 GHz high IP3 LNA | BGA2003 |

* no web link available, published in Appendix 6th edition, see RF Manual web page

1.5 TV / VCR / DVD tuning

Application diagram

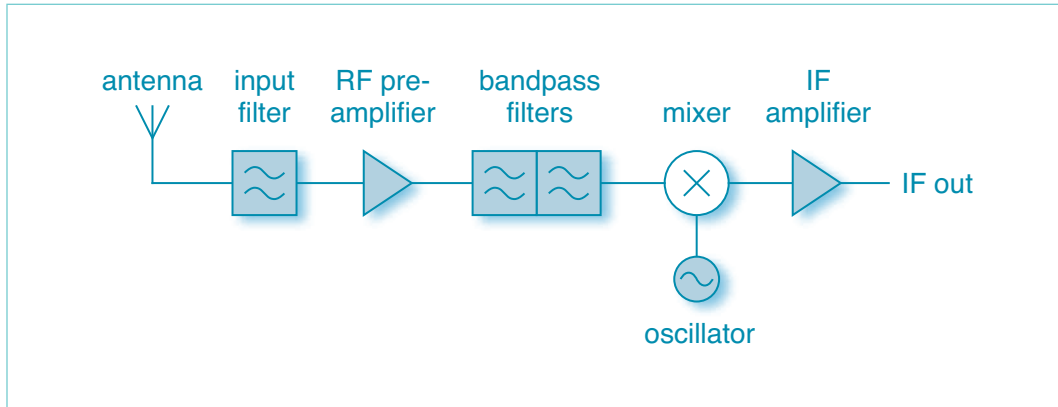

Recommended products

| Function | Product | Package | Type | |
|--------------|---------------|----------|--------|--------|
| Input filter | Varicap diode | VHF low | SOD323 | BB152 |
| | | | SOD523 | BB182 |
| | | VHF high | SOD323 | BB153 |
| | | | SOD523 | BB178 |
| | | UHF | SOD523 | BB187 |
| | | | SOD323 | BB149A |
| | | SOD523 | BB179 | |

| Function | Product | Package | Type | |
|-----------------|---------------|----------|--------|--------|
| Bandpass filter | Varicap diode | VHF low | SOD323 | BB152 |
| | | | SOD523 | BB182 |
| | | VHF high | SOD323 | BB153 |
| | | | SOD523 | BB178 |
| | | UHF | SOD523 | BB187 |
| | | | SOD323 | BB149A |
| | | SOD523 | BB179 | |

| Function | Product | Package | Type | |
|------------------|---------|------------|--------|---------|
| RF pre-amplifier | Mosfet | 5 V | SOT143 | BF904 |
| | | | SOT143 | BF909 |
| | | | SOT143 | BF1201 |
| | | | SOT143 | BF1202 |
| | | | SOT143 | BF1105 |
| | | | SOT143 | BF1211 |
| | | 9 V | SOT143 | BF1212 |
| | | | SOT143 | BF1100 |
| | | | SOT143 | BF1109 |
| | | 2-in-1.5 V | SOT363 | BF1102R |
| | | | SOT363 | BF1203 |
| | | | SOT363 | BF1204 |
| | | | SOT363 | BF1205 |
| | | | SOT363 | BF1206 |
| | | | SOT363 | BF1207 |
| | | SOT363 | BF1208 | |

| Function | Product | Package | Type | |
|------------|---------------|----------|--------|--------|
| Oscillator | Varicap diode | VHF low | SOD323 | BB152 |
| | | | SOD523 | BB182 |
| | | VHF high | SOD323 | BB153 |
| | | | SOD523 | BB178 |
| | | UHF | SOD523 | BB187 |
| | | | SOD323 | BB149A |
| | | SOD523 | BB179 | |

| Function | Product | Package | Type | |
|--------------|---------|--------------------|--------|---------|
| IF amplifier | MMIC | Wideband amplifier | SOT363 | BGA2717 |


Recommended application notes

| | |
|--|----------------------|
| Application note for Mosfets: BF9x, BF110x, BF120x* | BF9x, BF110x, BF120x |
|--|----------------------|

* no web link available, published in Appendix 3rd edition, see RF Manual web page

1.6 Car Radio Receiver (CREST ICs:TEF6860HL,TEF6862HL)

Application diagram

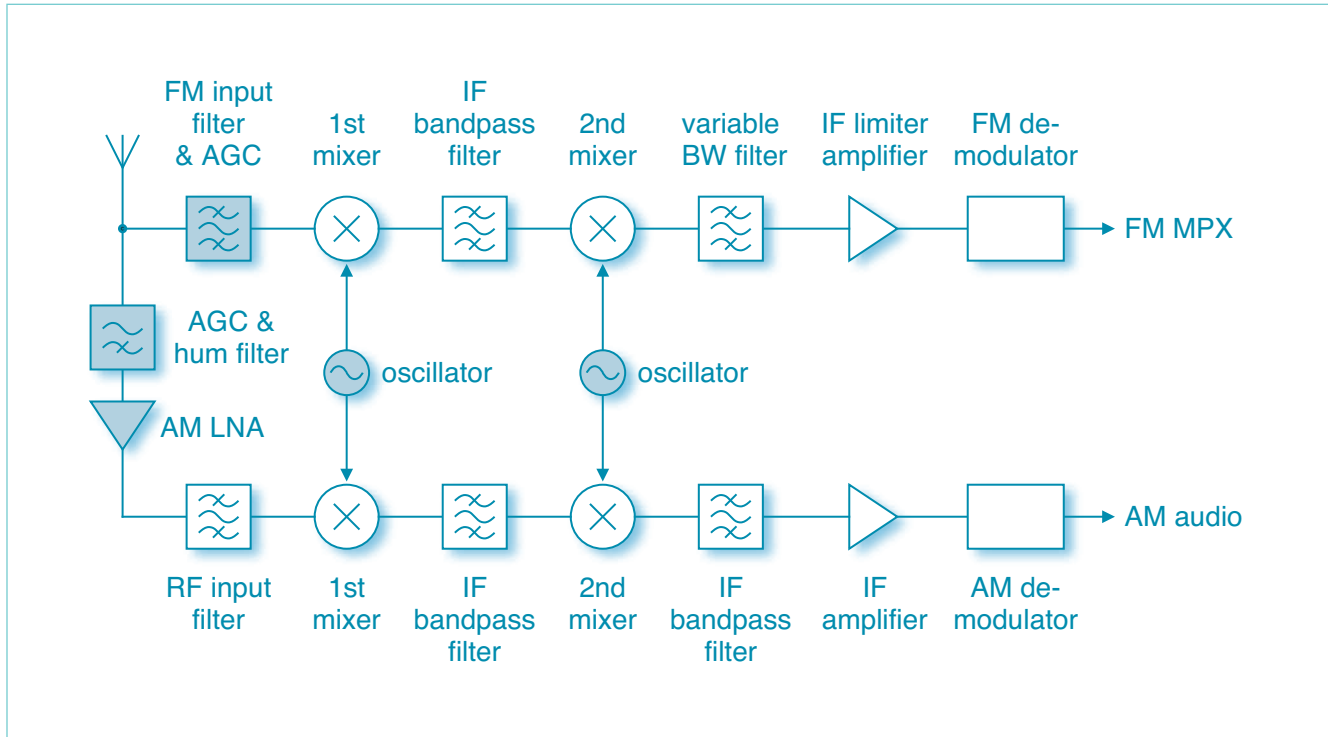

Recommended products

| Function | Product | Package | Type |
|---------------|---------------|---------|----------------|
| AM LNA | RF transistor | JFET | SOT23 BF862 |

| Function | Product | Package | Type |
|-------------------|----------|---------------|-----------------|
| Oscillator | RF diode | Varicap diode | SOD323 BB156 |
| | | | SOD523 BB208 |

| Function | Product | Package | Type |
|----------------------------------|----------|---------------|--------------------|
| FM input filter & AGC | RF diode | Varicap diode | SOT23 BB201* |
| | | | SOT23 BB207 |
| | | PIN diode | SOD523 BAP70-02 |
| | | | SOD323 BAP70-03 |

| Function | Product | Package | Type |
|-----------------------------|----------|-----------|-------------------|
| AGC & hum filter | RF diode | PIN diode | SOT363 BAP70AM |

ad* = OIRT

- Note 1: all these recommended discrete products are applicable for NICEPACS, CCC en DDICE:
 NICE: TEA6840H, TEA6845H, TEA6846H, NICEPACS: TEA6848H, TEA6849H; CCC: TEF6901H, TEF6903H; DDICE: TEA6721HL.
 All these recommended discrete products are applicable excluding AM LNA in: DICE2: TEF6730HWCE ICs: TEF6848H, TEF6849H).
- Note 2: Phone and portable radio (IC: TEA5757) use varicap BB200 as FM oscillator.
 Phone and portable radio (IC: TEA5767/68) use varicap BB202 as FM oscillator.

Recommended application notes


| | |
|---|--------------------------------|
| Low-voltage FM stereo radio (TEA5767/68)* | BB202 |
| A NICE radio (TEA6848H) - Draft** | JFETS, Varicaps and PIN diodes |
| Integrated Car Radio CCC (TEF69xxx) - Draft** | JFETS, Varicaps and PIN diodes |

* no web link available, published in Appendix 3rd edition, see RF Manual web page

** no web link available, ask your Philips sales representative

1.7 CATV Electrical (Line Extenders)

Application diagram

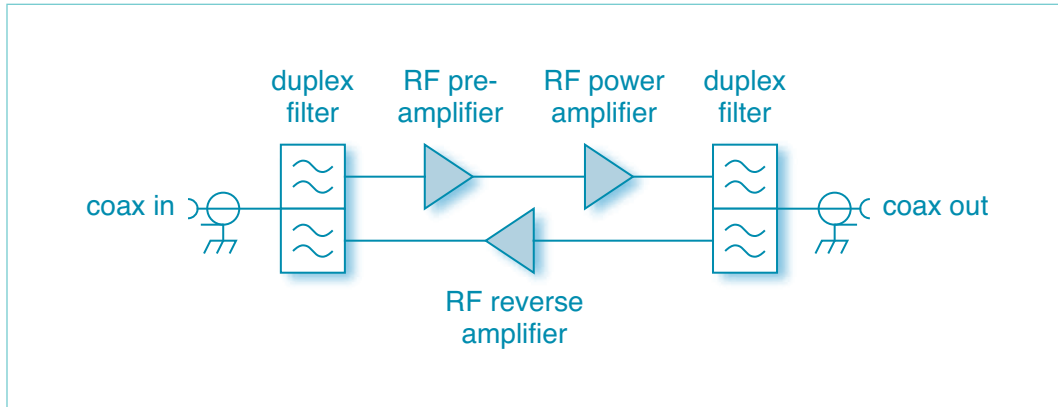

Recommended products

| Function | Product | Frequency | Gain (dB) | Type | |
|-------------------------|-------------|-----------|-------------|-------------|---------|
| RF Pre Amplifier | Push-Pulls | 550Mhz | 33.5 - 35.5 | BGY588N | |
| | | | 33.5 - 35.5 | BGY588C | |
| | | | 26.2 - 27.8 | BGY587B | |
| | | 600Mhz | 21 - 22 | BGY687 | |
| | | | 750Mhz | 33.5 - 35.2 | BGE788C |
| | | | | 33.5 - 34.5 | BGE788 |
| | | 860Mhz | 18 - 19 | BGY785A | |
| | | | 21 - 22 | BGY787 | |
| | | | 18 - 19 | BGY885A | |
| | | | 21 - 22 | BGY887 | |
| 1000Mhz | 33.5 - 34.5 | BGY888 | | | |
| | 25.2 - 25.8 | CGY887A | | | |
| | | 18-19 | BGY1085A | | |

| Function | Product | Frequency | Gain (dB) | Type |
|---------------------------|----------------|-----------|---------------|---------|
| RF Power Amplifier | Power Doublers | 550Mhz | 18-19 | BGD502 |
| | | | 19.5 - 20.5 | BGD704 |
| | | 750Mhz | 18.2 - 18.8 | BGD712 |
| | | | 18.2 - 18.8 | BGD712C |
| | | | 20 - 20.6 | BGD714 |
| | | 860Mhz | 18 -19 | BGD802 |
| | | | 18.2 18.8 | BGD812 |
| | | | 19.7 20.3 | BGD814 |
| | | | 18.2 -18.8 | BGD902 |
| | | | 19.7 -20.3 | BGD904 |
| | | | 21.2 - 21.8 | BGD906 |
| | | | 19.75 - 20.25 | CGD914 |
| 19.25 - 19.75 | CGD923 | | | |

| Function | Product | Frequency | Gain (dB) | Type |
|-----------------------------|-----------------|-----------|-------------|--------|
| RF Reverse Amplifier | Reverse Hybrids | 5-75 MHz | 29.2 - 30.8 | BGY68 |
| | | 5-120 MHz | 24.5 - 25.5 | BGY66B |
| | | 5-200 MHz | 23.5 - 24.5 | BGY67A |


*) All available in SOT115 package

Recommended application notes

| | |
|--|--------|
| BGS67A high-dynamic-range hybrid ampl. reverse ampl. 2-way CATV systems | BGS67A |
| A hybrid wideband amplifier module for digital CATV networks with BGD902 | BGD902 |

1.8 CATV Optical (Optical Nodes)

Application diagram

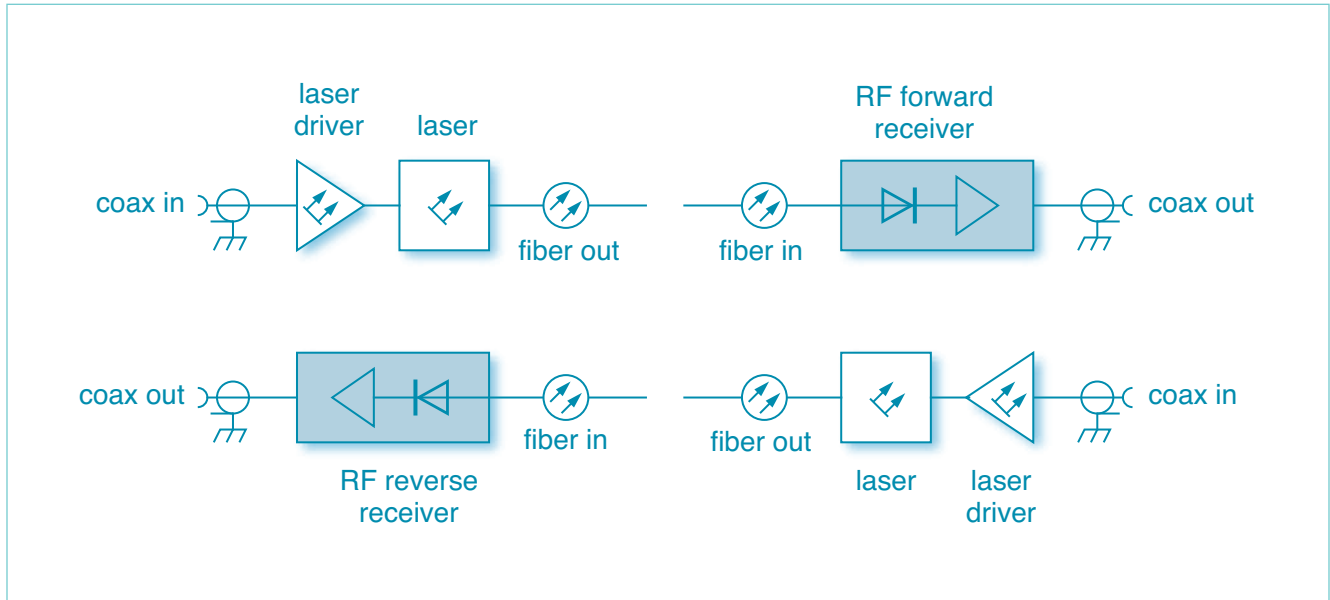

Recommended products

| Function | Product | Frequency | Package | Type |
|----------------------------|--------------------------|-----------|---------|--------|
| RF Reverse Receiver | Optical Reverse Receiver | 300 MHz | SOT115 | BGO387 |


| Function | Product | Frequency | Package | Type |
|----------------------------|-----------------------|-----------|---------|--------|
| RF Forward Receiver | Forward Path Receiver | 750Mhz | SOT115 | BGO747 |
| | | 860Mhz | SOT115 | BGO807 |
| | | | SOT115 | BGO827 |
| | | | SOT115 | BGO847 |

Recommended application notes

| | |
|---|-----------------------|
| Using a Philips Optical Receiver in CATV applications | All Optical Receivers |
|---|-----------------------|

1.9 Optical Networking (SFF/SFP modules)

Application diagram

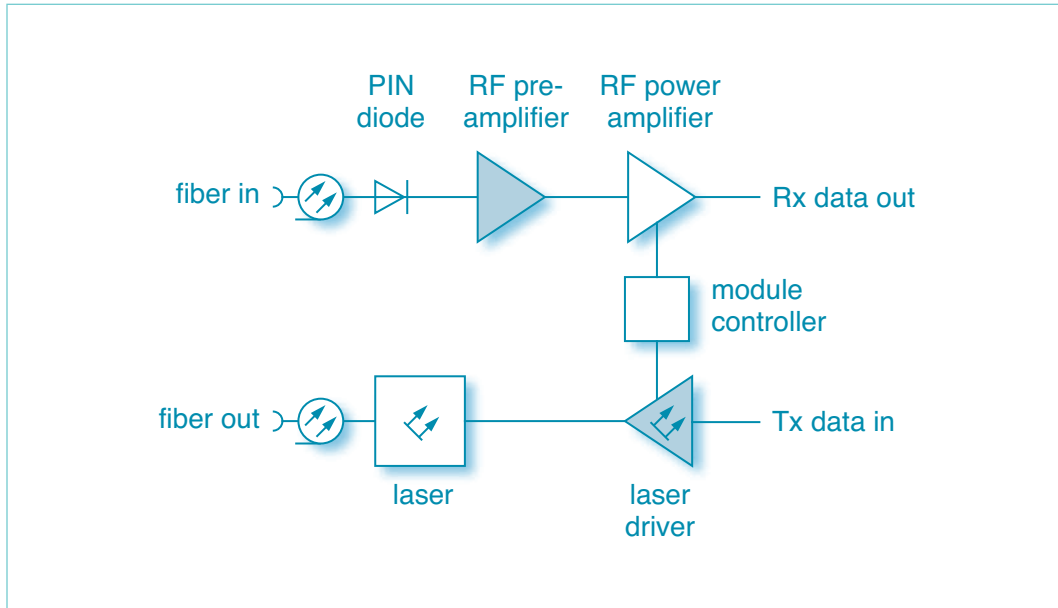

Recommended products

| Function | Product | Data rate (Mb/s) | Package | Type |
|-------------------------|--------------------------|------------------|----------|---------|
| RF Pre Amplifier | Transimpedance Amplifier | 155 | die only | TZA3036 |
| | | 622 | die only | TZA3026 |
| | | 1200 | die only | TZA3046 |
| | | 2488 | die only | TZA3013 |

| Function | Product | Data rate (Mb/s) | Package | Type |
|---------------------|--------------|------------------|-----------|----------|
| Laser driver | Laser driver | 1250 | SOT560-01 | TZA3047B |
| | | | SOT560-01 | TZA3050 |
| | | 3200 | SOT560-01 | TZA3010B |
| | | | SOT560-01 | TZA3011B |

Recommended application notes

| | |
|--|---------------|
| OM5811 demo boards supporting TZA3010/11/47 laser drivers for 30-3200 Mb/s | TZA3010/11/47 |
| TZA30x6 – Receiver Optical Sub-Assembly* | TZA30x6 |

* No web link available of this application note.
Please ask your Philips sales representative for assistance.

2. Product portfolio

Philips product selector:

<http://www.semiconductors.philips.com/products/selector/27046/index.html>

Philips RF discretes catalogue:

<http://www.semiconductors.philips.com/cgi-bin/catalog/catalog.pl/mms/219/282/^27046/>

2.1 New products

| Type | Application / Description | Product status 1 Nov. 05 | Plan Release | Info |
|-----------------------|--|-----------------------------|--------------|------------------------------|
| NEW: RF diodes | | | | |
| BB202LX | Varicap for mobile radio in cellulars, MCD in 1006 leadless package | CQS | Q1 2006 | Chapter 2.2.1 Varicap diodes |
| BB178LX | Varicap for TV & Satellite in 1006 leadless package | CQS | Q1 2006 | |
| BB179BLX | Varicap for TV & Satellite in 1006 leadless package | CQS | Q1 2006 | |
| BB179LX | Varicap for TV & Satellite in 1006 leadless package | CQS | Q1 2006 | |
| BB181LX | Varicap for TV & Satellite in 1006 leadless package | CQS | Q1 2006 | |
| BB182LX | Varicap for TV & Satellite in 1006 leadless package | CQS | Q1 2006 | |
| BB184LX | Low voltage varicap for TV & Satellite UHF in 1006 leadless package | DEV | Q2 2006 | |
| BB185LX | Low voltage varicap for TV & Satellite VHF in 1006 leadless package | DEV | Q2 2006 | |
| BB187LX | Varicap for TV & Satellite in 1006 leadless package | CQS | Q1 2006 | |
| BB198 | Varicap for VCO,VCXO,TCXO | CQS | Q4 2005 | |
| BB199 | Varicap for VCO,VCXO,TCXO | CQS | Q4 2005 | |
| BB140LX | Varicap for VCO,VCXO,TCXO in 1006 leadless package | CQS | Q3 2005 | |
| BB143LX | Varicap for VCO,VCXO,TCXO in 1006 leadless package | DEV | Q2 2006 | |
| BB404LX | Double BB202 for VCO and FM radio tuning in 1006 leadless package | DEV | Q3 2006 | |
| BAP51LX | Cellular phone, Bluetooth, Cordless phone -RF switch & FE module in 1006 leadless package | CQS | Q1 2006 | Chapter 2.2.2 Pin diodes |
| BAP55LX | Cellular phone, Bluetooth, Cordless phone -RF switch & FE module in 1006 leadless package | DEV | Q1 2006 | |
| BAP70AM | Car Radio AM | CQS | Q4 2005 | |

NEW: RF bipolar transistor

| | | | | |
|---------|---|-----|---------|----------------------------|
| BFG424F | Satellite LNB - High frequency oscillators for DRO (Dielectric resonant oscillator) | RFS | Q1 2005 | Chapter 2.3.1 Wideband trs |
| BFG424V | Satellite LNB - High frequency oscillators for DRO (Dielectric resonant oscillator) | RFS | Q1 2005 | |

NEW: RF MOS transistors

| | | | | |
|---------|---|-----|---------|-----------------------|
| BF1206F | Twin MOSFET with two LNAs for TV/VCR/DVD/STB/SAT | RFS | Q4 2005 | Chapter 2.5.3 MOSFETs |
| BF1207 | Twin MOSFET with improved VHF cross modulation for TV/VCR/DVD/STB/SAT | RFS | Q2 2005 | |

NEW: RF modules

| | | | | |
|---------|---|-----|---------|---|
| BGY588C | Push Pull, 550 MHz, 34.5 dB, SOT115 | RFS | Q3 2005 | Chapter 2.6.2 CATV push pulls |
| BGE788C | Push Pull, 750 MHz, 34 dB, SOT115 | RFS | Q3 2005 | |
| OM7650 | 550 MHz, 34.5 dB gain Push-Pull, SOT115 | CQS | Q4 2005 | |
| OM7670 | 750 MHz, 34 dB gain Push-Pull, SOT115 | CQS | Q4 2005 | |
| BGD712C | 750 MHz, 18.5 dB gain Power Doubler, SOT115 | CQS | Q4 2005 | Chapter 2.6.3 CATV power doublers |
| CGD942C | 870 MHz, 22 dB gain Power Doubler, SOT115 | CQS | Q1 2006 | |
| CGD944C | 870 MHz, 24 dB gain Power Doubler, SOT115 | CQS | Q1 2006 | |
| CGD1042 | 1 GHz, 23 dB, GaAs, SOT115 | CQS | Q1 2006 | |
| CGD1044 | 1 GHz, 23 dB, GaAs, SOT115 | CQS | Q1 2006 | |
| BGO807C | 870 MHz Optical Receiver | CQS | Q4 2005 | Chapter 2.6.4 CATV Optical Receivers |

NEW: Fibre-optic transceivers ICs

| | | | | |
|---------|--|-----|---------|--|
| TZA3036 | Transimpedance Amplifier Datarate 0-155 | RFS | Q2 2005 | Chapter 2.7.2 Transimpedance amplifiers |
| TZA3026 | Transimpedance Amplifier Datarate 0-622 | RFS | Q1 2005 | |
| TZA3046 | Transimpedance Amplifier Datarate 0-1250 | CQS | Q3 2005 | |

2.2 RF diodes

Philips varicaps:

http://www.semiconductors.philips.com/markets/mms/products/discretes/featured_products/rf_varicaps/

Philips RF PIN diodes:


http://www.semiconductors.philips.com/markets/mms/products/discretes/key_solutions/multimarket/diodes/PIN_diodes/index.html

Philips RF Schottky diodes:

http://www.semiconductors.philips.com/markets/mms/products/discretes/key_solutions/multimarket/diodes/low_cd_schottky/index.html

2.2.1 Varicap diodes

Varicaps diodes line-up per frequency

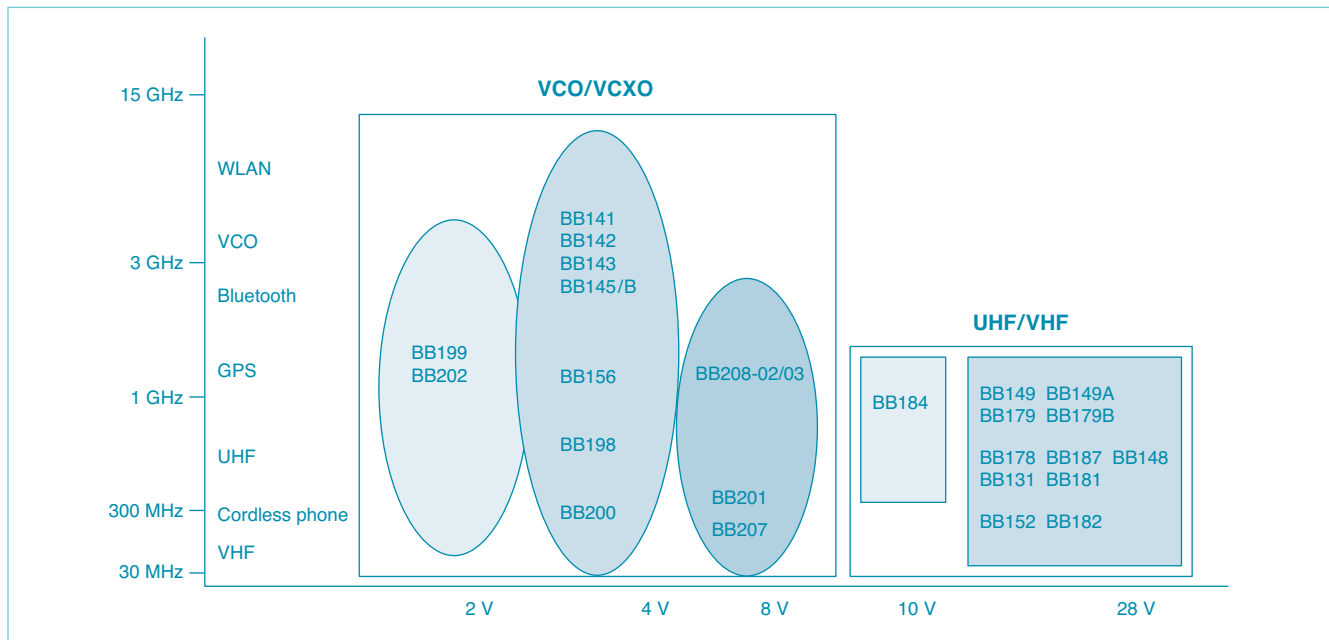

VCO varicap diodes

| Type | Package | Cd @ Vr (pF) | | | Cd @ Vr (pF) | | | TUNING RANGE Cd over voltage range (V) | | | rs (Ω) |
|------------|---------|--------------|------|-----|--------------|------|-----|--|-----|-----|---------|
| | | min | max | (V) | min | max | (V) | ratio | V1 | V2 | typ. |
| BB140LX*** | SOD882 | 2.48 | 2.69 | 1 | 1.27 | 1.38 | 3 | 1.88 - 2.04 | 1 | 3 | 1.2 |
| BB141 | SOD523 | 3.9 | 4.5 | 1 | 2.22 | 2.55 | 4 | 1.76 | 1 | 4 | 0.4 |
| BB142 | SOD523 | 4 | 4.9 | 1 | 1.85 | 2.35 | 4 | 2.2 | 1 | 4 | 0.5 |
| BB143 | SOD523 | 4.75 | 5.75 | 1 | 2.05 | 2.55 | 4 | 2.35 | 1 | 4 | 0.5 |
| BB143LX | SOD882T | 4.75 | 5.75 | 1 | 2.05 | 2.55 | 4 | 2.35 | 1 | 4 | 0.5 |
| BB145 | SOD523 | 6.4 | 7.4 | 1 | 2.75 | 3.25 | 4 | 2 | 1 | 4 | 0.6 |
| BB145B | SOD523 | 6.4 | 7.4 | 1 | 2.55 | 2.95 | 4 | 2.2 | 1 | 4 | 0.6 |
| BB202** | SOD523 | 28.2 | 33.5 | 0.2 | 7.2 | 11.2 | 2.3 | 2.5 | 0.2 | 2.3 | 0.35 |
| BB202LX** | SOD882T | 28 | 33.5 | 0.2 | 7.2 | 11.2 | 2.3 | 2.5 | 0.2 | 2.3 | 0.4 |
| BB156 | SOD323 | 14.4 | 17.6 | 1 | 7.6 | 9.6 | 4 | 1.86 | 1 | 4 | 0.4 |
| BB198 | SOD523 | 25 | 28.5 | 1 | 4.8 | 6.8 | 4 | - | - | - | 0.8 max |
| BB199 | SOD523 | 36.5 | 42.5 | 0.5 | 11.8 | 13.8 | 2 | - | - | - | 0.25 |
| BB208-02* | SOD523 | 19.9 | 23.2 | 1 | 4.5 | 5.4 | 7.5 | 4.3 | 1 | 7.5 | 0.35 |
| BB208-03* | SOD323 | 19.9 | 23.2 | 1 | 4.5 | 5.4 | 7.5 | 4.3 | 1 | 7.5 | 0.35 |

■ = New

ad* = including special design for FM car radio (CREST-IC: TEF6860)

ad** = including special design for mobile phone tuner ICs

ad*** = Not yet released, samples available

Radio varicap diodes: FM radio tuning

| Type | Package | Cd @ Vr (pF) | | | Cd @ Vr (pF) | | | TUNING RANGE Cd over voltage range (V) | | | rs (Ω) |
|-----------|---------|-----------------|------|-----|-----------------|------|-----|--|----------|-----|-----------|
| | | min | max | (V) | min | max | (V) | ratio (min) | V1 to V2 | | |
| BB804 | SOT23 | 42 | 46.5 | 2 | 26 typ. | | 8 | 1.75 | 2 | 8 | 0.2 |
| BB200 | SOT23 | 65.8 | 74.2 | 1 | 12 | 14.8 | 4.5 | 5 | 1 | 4.5 | 0.43 |
| BB201 | SOT23 | 89 | 102 | 1 | 25.5 | 29.7 | 7.5 | 3.1 | 1 | 7.5 | 0.3 |
| BB202** | SOD523 | 28.2 | 33.5 | 0.2 | 7.2 | 11.2 | 2.3 | 2.5 | 0.2 | 2.3 | 0.35 |
| BB202LX** | SOD882T | 28 | 33.5 | 0.2 | 7.2 | 11.2 | 2.3 | 2.5 | 0.2 | 2.3 | 0.4 |
| BB156 | SOD323 | 14.4 | 17.6 | 1 | 7.6 | 9.6 | 4 | 3.3 | 1 | 7.5 | 0.4 |
| BB207* | SOT23 | 76 | 86 | 1 | 25.5 | 29.7 | 7.5 | 2.6 | 1 | 7.5 | 0.2 |

■ = New

ad* = including special design for FM car radio (CREST-IC:TEF6860)

ad** = including special design for mobile phone tuner ICs

TV & satellite varicap diodes - UHF tuning

| Type | Package | Cd @ Vr (pF) | | | TUNING RANGE Cd over voltage range (V) | | | rs (Ω) | MATCHED SETS | TYPICAL APPLICATIONS | | | |
|------------------|---------|-----------------|------|-----|--|----------|----|-----------|-----------------|-------------------------|---|----|-----|
| | | min | max | (V) | ratio | V1 to V2 | | | | max | % | TV | VCO |
| Matched | | | | | | | | | | | | | |
| BB149 | SOD323 | 1.90 | 2.25 | 28 | 9.0 | 1 | 28 | 0.75 | 1.0 | X | - | - | X |
| BB149A | SOD323 | 1.95 | 2.22 | 28 | 9.7 | 1 | 28 | 0.75 | 2.0 | X | - | - | X |
| BB179 | SOD523 | 1.95 | 2.22 | 28 | 9.7 | 1 | 28 | 0.75 | 2.0 | X | X | - | X |
| BB179LX | SOD882T | 1.95 | 2.22 | 28 | 9.7 | 1 | 28 | 0.75 | 2.0 | X | X | - | X |
| BB179B | SOD523 | 1.90 | 2.25 | 28 | 9.2 | 1 | 28 | 0.75 | 2.0 | X | - | - | X |
| BB179BLX | SOD882T | 1.90 | 2.25 | 28 | 9.2 | 1 | 28 | 0.75 | 2.0 | X | - | - | X |
| BB184 | SOD523 | 1.87 | 2.13 | 10 | 6 | 1 | 10 | 0.65 typ. | 2 | X | X | - | - |
| BB184LX | SOD882T | 1.87 | 2.13 | 10 | 6 | 1 | 10 | 0.65 typ. | 2 | X | X | - | - |
| Unmatched | | | | | | | | | | | | | |
| BB135 | SOD323 | 1.70 | 2.10 | 28 | 10.0 | 0.5 | 28 | 0.75 | - | X | X | - | - |
| BBY31 | SOT23 | 1.60 | 2.00 | 28 | 8.3 | 1 | 28 | 1.20 | - | X | - | - | X |
| BBY39 | | | | | | | | | | | | | |
| BBY62 | SOT143 | | | | | | | | | | | | |

■ = New

TV & satellite varicap diodes - VHF tuning

| Type | Package | Cd @ Vr (pF) | | | TUNING RANGE Cd over voltage range (V) | | | rs (Ω) | MATCHED SETS | TYPICAL APPLICATIONS | | | |
|------------------|---------|-----------------|-------|-----|--|----------|----|-----------|-----------------|-------------------------|---|----|-----|
| | | min | max | (V) | ratio | V1 to V2 | | | | max | % | TV | VCO |
| Matched | | | | | | | | | | | | | |
| BB148 | SOD323 | 2.4 | 2.75 | 28 | 15 | 1 | 28 | 0.9 | 1 | X | - | - | X |
| BB152 | SOD323 | 2.48 | 2.89 | 28 | >20.6 | 1 | 28 | 1.2 | 2 | X | - | - | X |
| BB153 | SOD323 | 2.36 | 2.75 | 28 | >13.5 | 1 | 28 | 0.8 | 2 | X | - | - | X |
| BB178 | SOD523 | 2.36 | 2.75 | 28 | >13.5 | 1 | 28 | 0.8 | 2 | X | - | - | X |
| BB178LX | SOD882T | 2.36 | 2.75 | 28 | >13.5 | 1 | 28 | 0.8 | 2 | X | - | - | X |
| BB182 | SOD523 | 2.48 | 2.89 | 28 | >20.6 | 1 | 28 | 1.2 | 2 | X | - | - | X |
| BB182LX | SOD882T | 2.48 | 2.89 | 28 | >20.6 | 1 | 28 | 1.2 | 2 | X | - | - | X |
| BB187 | SOD523 | 2.57 | 2.92 | 25 | 11 | 2 | 25 | 0.75 | 2 | X | - | - | X |
| BB187LX | SOD882T | 2.57 | 2.92 | 25 | 11 | 2 | 25 | 0.9 | 2 | X | - | - | X |
| Unmatched | | | | | | | | | | | | | |
| BB131 | SOD323 | 0.7 | 1.055 | 28 | 14 | 0.5 | 28 | 3 | - | X | - | X | X |
| BB181 | SOD523 | 0.7 | 1.055 | 28 | 14 | 0.5 | 28 | 3 | - | X | - | X | X |
| BB181LX | SOD882T | 0.7 | 1.055 | 28 | 14 | 0.5 | 28 | 3 | - | X | - | X | X |
| BBY40 | SOT23 | 4.3 | 6.00 | 25 | 5.5 | 3 | 25 | 0.7 | - | X | - | - | X |

■ = New

2.2.2 PIN diodes

PIN diodes

| Type | Package | Conf | Limits | | RD (W) typ @ | | | Cd (pF) type @ | | |
|------------|---------|------|--------|--------|--------------|------|-------|----------------|------|-----------|
| | | | Vr(V) | If(mA) | 0.5mA | 1 mA | 10 mA | 0V | 1V | 20V |
| BAP50-02 | SOD523 | S | 50 | 50 | 25 | 14 | 3 | 0.4 | 0.3 | 0.22 @ 5V |
| BAP50-03 | SOD323 | S | 50 | 50 | 25 | 14 | 3 | 0.4 | 0.3 | 0.2 @ 5V |
| BAP50-04 | SOT23 | SS | 50 | 50 | 25 | 14 | 3 | 0.45 | 0.35 | 0.3 @ 5V |
| BAP50-04W | SOT323 | SS | 50 | 50 | 25 | 14 | 3 | 0.45 | 0.35 | 0.3 @ 5V |
| BAP50-05 | SOT23 | CC | 50 | 50 | 25 | 14 | 3 | 0.45 | 0.35 | 0.3 @ 5V |
| BAP50-05W | SOT323 | CC | 50 | 50 | 25 | 14 | 3 | 0.45 | 0.35 | 0.3 @ 5V |
| BAP51LX | SOD882T | S | 60 | 60 | 5.5 | 3.6 | 1.5 | 0.4 | 0.3 | 0.2 @ 5V |
| BAP51-02 | SOD523 | S | 60 | 60 | 5.5 | 3.6 | 1.5 | 0.4 | 0.3 | 0.2 @ 5V |
| BAP51-03 | SOD323 | S | 60 | 60 | 5.5 | 3.6 | 1.5 | 0.4 | 0.3 | 0.2 @ 5V |
| BAP51-04W | SOT323 | SS | 50 | 50 | 5.5 | 3.6 | 1.5 | 0.4 | 0.3 | 0.2 @ 5V |
| BAP51-05W | SOT323 | CC | 60 | 60 | 5.5 | 3.6 | 1.5 | 0.4 | 0.3 | 0.2 @ 5V |
| BAP51-06W | SOT323 | CA | 50 | 50 | 5.5 | 3.6 | 2 | 0.4 | 0.3 | 0.2 @ 5V |
| BAP55LX | SOD882T | S | 50 | 100 | 3.4 | 2.3 | 1 | 0.27 | 0.23 | 0.18 @ 5V |
| BAP63-02 | SOD523 | S | 50 | 100 | 2.5 | 1.95 | 1.17 | 0.36 | 0.32 | 0.25 |
| BAP63-03 | SOD323 | S | 50 | 100 | 2.5 | 1.95 | 1.17 | 0.4 | 0.35 | 0.27 |
| BAP63-05W | SOT323 | CC | 50 | 100 | 2.5 | 1.95 | 1.17 | 0.4 | 0.35 | 0.3 |
| BAP64-02 | SOD523 | S | 200 | 175 | 20 | 10 | 2 | 0.52 | 0.37 | 0.23 |
| BAP64-03 | SOD323 | S | 200 | 175 | 20 | 10 | 2 | 0.52 | 0.37 | 0.23 |
| BAP64-04 | SOT23 | SS | 200 | 175 | 20 | 10 | 2 | 0.52 | 0.37 | 0.23 |
| BAP64-04W | SOT323 | SS | 200 | 100 | 20 | 10 | 2 | 0.52 | 0.37 | 0.23 |
| BAP64-05 | SOT23 | CC | 200 | 175 | 20 | 10 | 2 | 0.52 | 0.37 | 0.23 |
| BAP64-05W | SOT323 | CC | 200 | 100 | 20 | 10 | 2 | 0.52 | 0.37 | 0.23 |
| BAP64-06 | SOT23 | CA | 200 | 175 | 20 | 10 | 2 | 0.52 | 0.37 | 0.23 |
| BAP64-06W | SOT323 | CA | 100 | 100 | 20 | 10 | 2 | 0.52 | 0.37 | 0.23 |
| BAP65-02 | SOD523 | S | 30 | 100 | - | 1 | 0.56 | 0.65 | 0.6 | 0.375 |
| BAP65-03 | SOD323 | S | 30 | 100 | - | 1 | 0.56 | 0.65 | 0.6 | 0.375 |
| BAP65-05 | SOT23 | CC | 30 | 100 | - | 1 | 0.56 | 0.65 | 0.6 | 0.375 |
| BAP65-05W | SOT323 | CC | 30 | 100 | - | 1 | 0.56 | 0.65 | 0.6 | 0.375 |
| BAP70AM | SOT363 | SS | 50 | 100 | 77 | 40 | 5.4 | 0.57 | 0.4 | 0.2 |
| BAP70-02 | SOD523 | S | 50 | 100 | 77 | 40 | 5.4 | 0.57 | 0.4 | 0.2 |
| BAP70-03 | SOD323 | S | 50 | 100 | 77 | 40 | 5.4 | 0.57 | 0.4 | 0.2 |
| BAP70-04W | SOT323 | SS | 50 | 100 | 77 | 40 | 5.4 | 0.57 | 0.4 | 0.2 |
| BAP70-05 | SOT23 | CC | 50 | 100 | 77 | 40 | 5.4 | 0.57 | 0.4 | 0.2 |
| BAP1321-02 | SOD523 | S | 60 | 100 | 3.4 | 2.4 | 1.2 | 0.4 | 0.35 | 0.25 |
| BAP1321-03 | SOD323 | S | 60 | 100 | 3.4 | 2.4 | 1.2 | 0.4 | 0.35 | 0.25 |
| BAP1321-04 | SOT23 | SS | 60 | 100 | 3.4 | 2.4 | 1.2 | 0.4 | 0.35 | 0.25 |

- = New
- S = Single
- SS = Series
- CC = Common Cathode
- CA = Common Anode

2.2.3 Band-switch diodes

| Type | Package | MAXIMUM RATINGS | | CHARACTERISTICS ; maximals | | | | | |
|-------|---------|-----------------|--------|----------------------------|------|-------|--------------|-----|----------|
| | | VR(V) | IF(mA) | Rd@IF and f | | | Cd @VR and f | | |
| | | | | - | (mA) | (MHz) | (pF) | (V) | (MHz) |
| BA277 | SOD523 | 35 | 100 | 0.7 | 2 | 100 | 1.2 | 6 | 1 |
| BA278 | SOD523 | 35 | 100 | 0.7 | 2 | 100 | 1.2 | 6 | 1 |
| BA891 | SOD523 | 35 | 100 | 0.7 | 3 | 100 | 0.9 | 3 | 1 |
| BA591 | SOD323 | 35 | 100 | 0.7 | 3 | 100 | 0.9 | 3 | 1 |
| BA792 | SOD110 | 35 | 100 | 0.7 | 3 | 200 | 1.1 | 3 | 1 to 100 |
| BAT18 | SOT23 | 35 | 100 | 0.7 | 5 | 200 | 1.0 | 20 | 1 |

2.2.4 Schottky diodes

Features:

- (Very) low diode capacitance
- (Very) low forward voltage
- Single and triple-isolated diode
- (Ultra / very) small package

Applications:

- Digital applications:
 - ultra high-speed switching
 - clamping circuits
- RF applications:
 - diode ring mixer
 - RF detector
 - RF voltage doubler

Low-capacitance Schottky diodes

| Type | Package | VR max. (V) | IF max. (mA) | VF max. (mV) | CD max. (pF) |
|-----------|---------|----------------|-----------------|-----------------|-----------------|
| BAT17 | SOT23 | 4 | 30 | 450 @ IF = 1 mA | 1 @ VR = 0 V |
| PMBD353 | SOT23 | 4 | 30 | 450 @ IF = 1 mA | 1 @ VR = 0 V |
| PMBD354 | SOT23 | 4 | 30 | 450 @ IF = 1 mA | 1 @ VR = 0 V |
| 1PS76SB17 | SOD323 | 4 | 30 | 450 @ IF = 1 mA | 1 @ VR = 0 V |
| 1PS66SB17 | SOT666 | 4 | 30 | 450 @ IF = 1 mA | 1 @ VR = 0 V |
| 1PS79SB17 | SOD523 | 4 | 30 | 450 @ IF = 1 mA | 1 @ VR = 0 V |
| 1PS66SB63 | SOT666 | 5 | 20 | 250 @ IF = 1 mA | 0.5 @ VR = 0 V |
| 1PS79SB63 | SOD523 | 5 | 20 | 250 @ IF = 1 mA | 0.5 @ VR = 0 V |
| 1PS10SB63 | SOD882 | 5 | 20 | 250 @ IF = 1 mA | 0.5 @ VR = 0 V |
| 1PS88SB82 | SOT363 | 15 | 30 | 340 @ IF = 1 mA | 1 @ VR = 0 V |
| 1PS70SB82 | SOT323 | 15 | 30 | 340 @ IF = 1 mA | 1 @ VR = 0 V |
| 1PS70SB84 | SOT323 | 15 | 30 | 340 @ IF = 1 mA | 1 @ VR = 0 V |
| 1PS70SB85 | SOT323 | 15 | 30 | 340 @ IF = 1 mA | 1 @ VR = 0 V |
| 1PS70SB86 | SOT323 | 15 | 30 | 340 @ IF = 1 mA | 1 @ VR = 0 V |
| 1PS66SB82 | SOT666 | 15 | 30 | 340 @ IF = 1 mA | 1 @ VR = 0 V |
| 1PS10SB82 | SOD882 | 15 | 30 | 340 @ IF = 1 mA | 1 @ VR = 0 V |
| 1PS76SB62 | SOD323 | 40 | 20 | 800 @ IF = 2 mA | 0.6 @ VR = 0 V |
| 1PS66SB62 | SOT666 | 40 | 20 | 800 @ IF = 2 mA | 0.6 @ VR = 0 V |
| 1PS79SB62 | SOD523 | 40 | 20 | 800 @ IF = 2 mA | 0.6 @ VR = 0 V |
| 1PS10SB62 | SOD882 | 40 | 20 | 800 @ IF = 2 mA | 0.6 @ VR = 0 V |

2.3 RF Bipolar transistors


2.3.1 Wideband transistors

RF wideband transistors:

http://www.semiconductors.philips.com/markets/mms/products/discretes/key_solutions/multimarket/transistors/25_45ghz_wideband/index.html

Wideband transistors

The f_T - I_C curve represents Transition Frequency (f_T) characteristics as a function of collector current (I_C) for the six generations of RF wideband transistors. A group of transistors having the same collector current (I_C) & similar transition frequencies (f_T) represents a curve. The curve number matches products in the table, detailing their RF characteristics.

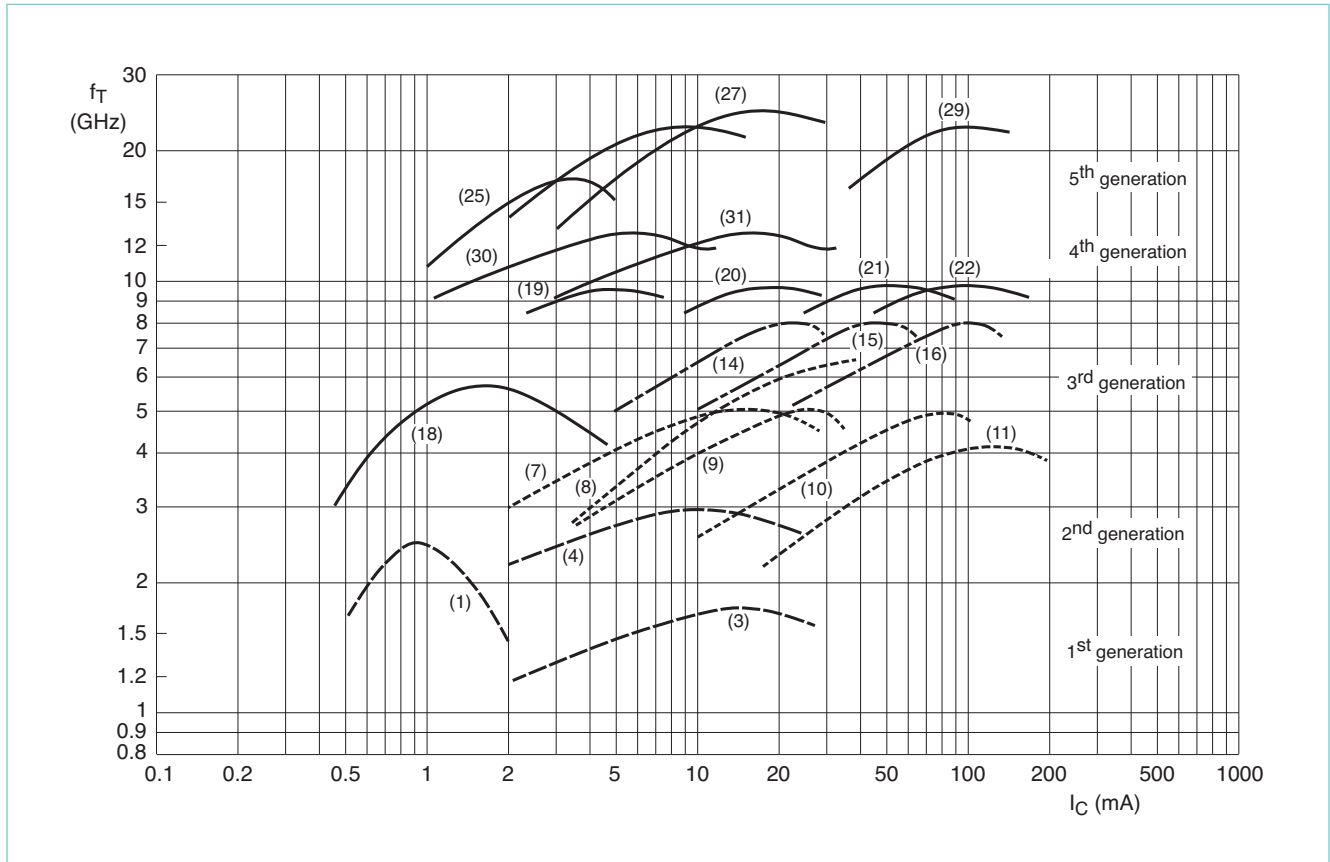

Wideband transistors (RF small signal)

| Type | Curve | Package | F _i | V _{ceo} | I _c | P _{tot} | Polarity | Gum (dB) | F (dB) | @ (MHz) | Gum (dB) | F (dB) | @ (MHz) | V _o (mV) | PI (dBm) | ITO (dBm) | @ I _c & (mA) | V _{ce} (V) |
|----------|-------|---------|----------------|------------------|----------------|------------------|----------|----------|--------|---------|----------|--------|---------|---------------------|----------|-----------|-------------------------|---------------------|
| | | | (GHz) | (V) | (mA) | (mW) | | | | | | | | | | | | |
| BFG10(X) | - | SOT143 | - | 8 | 250 | 250 | NPN | - | - | - | 7 | - | 1900 | - | - | - | - | - |
| BFG10W/X | - | SOT343 | - | 10 | 250 | 400 | NPN | - | - | - | 7 | - | 1900 | - | - | - | - | - |
| BLT80 | - | SOT223 | - | 10 | 250 | 2000 | NPN | >6 | - | 900 | - | - | - | - | - | - | - | - |
| BLT81 | - | SOT223 | - | 9.5 | 500 | 2000 | NPN | >6.5 | - | 900 | - | - | - | - | - | - | - | - |
| BLT50 | - | SOT223 | - | 10 | 500 | 2000 | NPN | >7 | - | 900 | - | - | - | - | - | - | - | - |
| BLT70 | - | SOT223 | - | 8 | 250 | 2100 | NPN | >6 | - | 900 | - | - | - | - | - | - | - | - |
| PMBHT10 | - | SOT23 | 0.65 | 25 | 40 | 400 | NPN | - | - | - | - | - | - | - | - | - | - | - |
| BFS17 | 3 | SOT23 | 1 | 15 | 25 | 300 | NPN | - | 4.5 | 500 | - | - | - | - | - | - | - | - |
| BFS17W | 3 | SOT323 | 1.6 | 15 | 50 | 300 | NPN | - | 4.5 | 500 | - | - | - | - | - | - | - | - |
| BFT25 | 1 | SOT23 | 2.3 | 5 | 6.5 | 30 | NPN | 18 | 3.8 | 500 | 12 | - | 800 | - | - | - | - | - |
| BFS17A | 4 | SOT23 | 2.8 | 15 | 25 | 300 | NPN | 13.5 | 2.5 | 800 | - | - | - | 150 | - | - | 14 | 10 |
| BFG35 | 11 | SOT223 | 4 | 18 | 150 | 1000 | NPN | 15 | - | 500 | 11 | - | 800 | 750 | - | - | 100 | 10 |
| BFQ18 | 11 | SOT89 | 4 | 18 | 150 | 1000 | NPN | - | - | - | - | - | - | - | - | - | - | - |

■ = New

Wideband transistors (RF small signal)

| Type | Curve | Package | F _c | V _{ceo} | I _c | P _{tot} | Polarity | Gum (dB) | F (dB) | @ (MHz) | Gum (dB) | F (dB) | @ (MHz) | V _o (mV) | PI (dBm) | ITO (dBm) | @ I _c & (mA) | V _{ce} (V) |
|------------|-------|----------|----------------|------------------|----------------|------------------|----------|----------|--------|---------|----------|--------|---------|---------------------|----------|-----------|-------------------------|---------------------|
| | | | (GHz) | (V) | (mA) | (mW) | | | | | | | | | | | | |
| | | | Typical | Maximum values | | | | | | | | | | | | | | |
| BFG25A/X | 18 | SOT143 | 5 | 5 | 6.5 | 32 | NPN | 18 | 1.8 | 1000 | - | - | - | - | - | - | - | - |
| BFG25W(X) | 18 | SOT343 | 5 | 5 | 6.5 | 500 | NPN | 16 | 2 | 1000 | 8 | - | 2000 | - | - | - | - | - |
| BFG31 | 10 | SOT223 | 5 | 15 | 100 | 1000 | PNP | 16 | - | 500 | 12 | - | 800 | 550 | - | - | 70 | 10 |
| BFG590(X) | 22 | SOT143 | 5 | 15 | 200 | 400 | NPN | 13 | - | 900 | 7.5 | - | 2000 | - | - | - | - | - |
| BFG590W(X) | 22 | SOT343 | 5 | 15 | 200 | 500 | NPN | 13 | - | 900 | 7.5 | - | 2000 | - | 21 | - | 80 | 5 |
| BFG92A(X) | 7 | SOT143 | 5 | 15 | 25 | 400 | NPN | 16 | 2 | 1000 | 11 | 3 | 2000 | - | - | - | - | - |
| BFQ149 | 10 | SOT89 | 5 | 15 | 100 | 1000 | PNP | 12 | 3.75 | 500 | - | - | - | - | - | - | - | - |
| BFR106 | 10 | SOT23 | 5 | 15 | 100 | 500 | NPN | 11.5 | 3.5 | 800 | - | - | - | 350 | - | - | 50 | 9 |
| BFR92A | 7 | SOT23 | 5 | 15 | 25 | 300 | NPN | 14 | 2.1 | 1000 | 8 | 3 | 2000 | 150 | - | - | 14 | 10 |
| BFR92AW | 7 | SOT323 | 5 | 15 | 25 | 300 | NPN | 14 | 2 | 1000 | - | 3 | 2000 | - | - | - | - | - |
| BFR93AW | 8 | SOT323 | 5 | 12 | 35 | 300 | NPN | 13 | 1.5 | 1000 | 8 | 2.1 | 2000 | - | - | - | - | - |
| BFS25A | 18 | SOT323 | 5 | 5 | 6.5 | 32 | NPN | 13 | 1.8 | 1000 | - | - | - | - | - | - | - | - |
| BFT25A | 18 | SOT23 | 5 | 5 | 6.5 | 32 | NPN | 15 | 1.8 | 1000 | - | - | - | - | - | - | - | - |
| BFT92 | 7 | SOT23 | 5 | 15 | 25 | 300 | PNP | 18 | 2.5 | 500 | - | - | - | 150 | - | - | 14 | 10 |
| BFT92W | 7 | SOT323 | 5 | 15 | 35 | 300 | PNP | 17 | 2.5 | 500 | 11 | 3 | 1000 | - | - | - | - | - |
| BFT93 | 9 | SOT23 | 5 | 12 | 35 | 300 | PNP | 16.5 | 2.4 | 500 | - | - | - | 300 | - | - | 30 | 5 |
| BFT93W | 9 | SOT323 | 5 | 12 | 50 | 300 | PNP | 15.5 | 2.4 | 500 | 10 | 3 | 1000 | - | - | - | - | - |
| BFG97 | 10 | SOT223 | 5.5 | 15 | 100 | 1000 | NPN | 16 | - | 500 | 12 | - | 800 | 700 | - | - | 70 | 10 |
| BFQ19 | 10 | SOT89 | 5.5 | 15 | 100 | 1000 | NPN | 11.5 | 3.3 | 500 | 7.5 | - | 800 | - | - | - | - | - |
| BFG93A(X) | 8 | SOT143 | 6 | 12 | 35 | 300 | NPN | 16 | 1.7 | 1000 | 10 | 2.3 | 2000 | - | - | - | - | - |
| BFG94 | 8 | SOT223 | 6 | 12 | 60 | 700 | NPN | - | 2.7 | 500 | 13.5 | 3 | 1000 | 500 | 21.5 | 34 | 45 | 10 |
| BFR93A | 8 | SOT23 | 6 | 12 | 35 | 300 | NPN | 13 | 1.9 | 1000 | - | 3 | 2000 | 425 | - | - | 30 | 8 |
| BFG135 | 16 | SOT223 | 7 | 15 | 150 | 1000 | NPN | 16 | - | 500 | 12 | - | 800 | 850 | - | - | 100 | 10 |
| BFG591 | 22 | SOT223 | 7 | 15 | 200 | 2000 | NPN | 13 | - | 900 | 7.5 | - | 2000 | - | - | - | - | - |
| BFQ591 | 22 | SOT89 | 7 | 15 | 200 | 2000 | NPN | 13 | - | 900 | 7.5 | - | 2000 | - | - | - | - | - |
| BFG198 | 15 | SOT223 | 8 | 10 | 100 | 1000 | NPN | 18 | - | 500 | 15 | - | 800 | 700 | - | - | 70 | 8 |
| BFG67(X) | 14 | SOT143 | 8 | 10 | 50 | 380 | NPN | 17 | 1.7 | 1000 | 10 | 2.5 | 2000 | - | - | - | - | - |
| BFQ67 | 14 | SOT23 | 8 | 10 | 50 | 300 | NPN | 14 | 1.7 | 1000 | 8 | 2.7 | 2000 | - | - | - | - | - |
| BFQ67W | 14 | SOT323 | 8 | 10 | 50 | 300 | NPN | 13 | 2 | 1000 | 8 | 2.7 | 2000 | - | - | - | - | - |
| PBR941 | - | SOT23 | 8 | 10 | 50 | 360 | NPN | 15 | 1.4 | 1000 | 9.5 | 2 | 2000 | - | - | - | - | - |
| PBR951 | - | SOT23 | 8 | 10 | 100 | 365 | NPN | 14 | 1.3 | 1000 | 8 | 2 | 2000 | - | - | - | - | - |
| PRF947 | - | SOT323 | 8.5 | 10 | 50 | 250 | NPN | 16 | 1.5 | 1000 | 10 | 2.1 | 2000 | - | - | - | - | - |
| PRF957 | - | SOT323 | 8.5 | 10 | 100 | 270 | NPN | 15 | 1.3 | 1000 | 9.2 | 1.8 | 2000 | - | - | - | - | - |
| BFG505(X) | 19 | SOT143 | 9 | 15 | 18 | 150 | NPN | 20 | 1.6 | 900 | 13 | 1.9 | 2000 | - | 4 | 10 | 5 | 6 |
| BFG520(X) | 20 | SOT143 | 9 | 15 | 70 | 300 | NPN | 19 | 1.6 | 900 | 13 | 1.9 | 2000 | 275 | 17 | 26 | 20 | 6 |
| BFG520W(X) | 20 | SOT343 | 9 | 15 | 70 | 500 | NPN | 17 | 1.6 | 900 | 11 | 1.85 | 2000 | 275 | 17 | 26 | 20 | 6 |
| BFG540(X) | 21 | SOT143 | 9 | 15 | 120 | 500 | NPN | 18 | 1.9 | 900 | 11 | 2.1 | 2000 | 500 | 21 | 34 | 40 | 8 |
| BFG540W(X) | 21 | SOT343 | 9 | 15 | 120 | 500 | NPN | 16 | 1.9 | 900 | 10 | 2.1 | 2000 | 500 | 21 | 34 | 40 | 8 |
| BFG541 | 21 | SOT223 | 9 | 15 | 120 | 650 | NPN | 15 | 1.9 | 900 | 9 | 2.1 | 2000 | 500 | 21 | 34 | 40 | 8 |
| BFM505 | 19 | SOT363 | 9 | 8 | 18 | 500 | NPN | 17 | 1.4 | 900 | 10 | 1.9 | 2000 | - | - | - | - | - |
| BFM520 | 20 | SOT363 | 9 | 8 | 70 | 1000 | NPN | 15 | 1.7 | 900 | 9 | 1.9 | 2000 | - | - | - | - | - |
| BFQ540 | 21 | SOT89 | 9 | 12 | 120 | 1200 | NPN | - | 1.9 | 900 | - | - | - | 500 | - | - | 40 | 8 |
| BFR505 | 19 | SOT23 | 9 | 15 | 18 | 150 | NPN | 17 | 1.6 | 900 | 10 | 1.9 | 2000 | - | 4 | 10 | 5 | 6 |
| BFR505T | 19 | SOT416 | 9 | - | 18 | 150 | NPN | 17 | 1.2 | 900 | - | - | - | - | - | - | - | - |
| BFR520 | 20 | SOT23 | 9 | 15 | 70 | 300 | NPN | 15 | 1.6 | 900 | 9 | 1.9 | 2000 | - | 17 | 26 | 20 | 6 |
| BFR520T | 20 | SOT416 | 9 | - | 70 | 150 | NPN | 15 | 1.6 | 900 | 9 | 1.9 | 2000 | - | 17 | 26 | - | - |
| BFR540 | 21 | SOT23 | 9 | 15 | 120 | 500 | NPN | 14 | 1.9 | 900 | 7 | 2.1 | 2000 | 550 | 21 | 34 | 40 | 8 |
| BFS505 | 19 | SOT323 | 9 | 15 | 18 | 150 | NPN | 17 | 1.6 | 900 | 10 | 1.9 | 2000 | - | 4 | 10 | 5 | 6 |
| BFS520 | 20 | SOT323 | 9 | 15 | 70 | 300 | NPN | 15 | 1.6 | 900 | 9 | 1.9 | 2000 | - | 17 | 26 | 20 | 6 |
| BFS540 | 21 | SOT323 | 9 | 15 | 120 | 500 | NPN | 14 | 1.9 | 900 | 8 | 2.1 | 2000 | - | 21 | 34 | 40 | 8 |
| PRF949 | - | SOT416 | 9 | 10 | 50 | 150 | NPN | 16 | 1.5 | 1000 | - | - | - | - | - | - | - | - |
| BFG310W/XR | 30 | SOT343XR | 14 | 6 | 10 | 60 | NPN | 18 | 1.1 | 1000 | - | - | - | - | 1.8 | 8 | 5 | 3 |
| BFG310/XR | 30 | SOT143XR | 14 | 6 | 10 | 60 | NPN | 18 | 1.1 | 1000 | - | - | - | - | 1.8 | 8 | 5 | 3 |
| BFG325W/XR | 31 | SOT343XR | 14 | 6 | 35 | 210 | NPN | 18 | 1.1 | 3000 | - | - | - | - | 8.7 | 19 | 15 | 3 |
| BFG325/XR | 31 | SOT143XR | 14 | 6 | 35 | 210 | NPN | 18 | 1.1 | 3000 | - | - | - | - | 8.7 | 19 | 15 | 3 |
| BFG403W | 25 | SOT343 | 17 | 4.5 | 3.6 | 16 | NPN | - | 1 | 900 | - | 1.6 | 2000 | - | 5 | 6 | 1 | 1 |
| BFG21W | 21 | SOT343 | 18 | 4.5 | 200 | 600 | NPN | - | - | - | 10 | - | 1900 | - | - | - | - | - |
| BFG480W | 29 | SOT343 | 21 | 4.5 | 250 | 360 | NPN | - | 1.2 | 900 | - | 1.8 | 2000 | - | - | 28 | 80 | 2 |
| BFG410W | 26 | SOT343 | 22 | 4.5 | 12 | 54 | NPN | - | 0.9 | 900 | - | 1.2 | 2000 | - | 5 | 15 | 10 | 2 |
| BFG424F | 27 | SOT343F | 25 | 4.5 | 30 | 135 | NPN | - | 0.8 | 900 | - | 1.2 | 2000 | - | 12 | 22 | 25 | 2 |
| BFG424W | 27 | SOT343 | 25 | 4.5 | 30 | 135 | NPN | - | 0.8 | 900 | - | 1.2 | 2000 | - | 12 | 22 | 25 | 2 |
| BFG425W | 27 | SOT343 | 25 | 4.5 | 30 | 135 | NPN | - | 0.8 | 900 | - | 1.2 | 2000 | - | 12 | 22 | 25 | 2 |

■ = New

2.4 RF ICs

2.4.1 MMICs

Philips RF MMICs:

<http://www.semiconductors.philips.com/markets/mms/products/discretes/mmic/index.html>

General-purpose wideband amplifiers (50 Ohm gain blocks)

| Type | Package | @ | | f ₁ ¹ | | @ 1GHz | | | | Gain ³ (db) @ | | | | Limits | | |
|---------|---------|--------------------|---------------------|-----------------------------|-------------------|------------------|------------------------|------------------------|------------------------|--------------------------|---------|---------|---------|--------------------|---------------------|-----------------------|
| | | V _s (V) | I _s (mA) | @-3dB (GHz) | NF (dB) | Psat (dBm) | Gain ² (dB) | P _{1dB} (dBm) | OIP ₃ (dBm) | 100 MHz | 2.2 GHz | 2.6 GHz | 3.0 GHz | V _s (V) | I _s (mA) | P _{tot} (mW) |
| BGA2711 | SOT363 | 5 | 12 | 3.6 ²⁾ | 4.7 | 2 | 12.9 | -2 | 10 | 13 | 14.1 | 13.8 | 12.8 | 6 | 20 | 200 |
| BGA2748 | SOT363 | 3 | 5.7 | 1.9 | 1.8 ²⁾ | -4 | 21.3 | -10 | -2 | 14.8 | 17.6 | 14.2 | 11.3 | 4 | 15 | 200 |
| BGA2771 | SOT363 | 3 | 33 | 2.4 | 4.4 | 12 ²⁾ | 21 | 11 | 22 | 20.3 | 20.4 | 17.5 | 15.2 | 4 | 50 | 200 |
| BGA2776 | SOT363 | 5 | 23.8 | 2.8 | 4.7 | 8 | 22.8 ²⁾ | 5.5 | 17 | 22.2 | 23.2 | 20.8 | 18.7 | 6 | 34 | 200 |
| BGA2709 | SOT363 | 5 | 23.5 | 2.8 | 4 | 12.4 | 22.7 | 8.3 | 24 | 22.6 | 22.7 | 22.0 | 21.1 | 6 | 35 | 200 |
| BGA2712 | SOT363 | 5 | 12.5 | 2.8 | 3.9 | 4.8 | 21.3 | 0 | 12 | 20.9 | 21.9 | 20.8 | 18.6 | 6 | 25 | 200 |
| BGM1011 | SOT363 | 5 | 25.5 | - | 4.7 | 13.8 | 30 | 12.2 | 23 | 25.0 | 37.0 | 32.0 | 28.0 | 6 | 35 | 200 |
| BGM1012 | SOT363 | 3 | 14.6 | 3.6 | 4.8 | 9.7 | 20.1 | 6 | 18 | 19.5 | 20.4 | 19.9 | 18.7 | 4 | 50 | 200 |
| BGM1013 | SOT363 | 5 | 27.5 | 2.1 | 4 | 15 | 35 | 12 | 24 | 34.4 | 31.0 | 28.2 | 25.3 | 6 | 35 | 200 |
| BGM1014 | SOT363 | 5 | 21 | 2.5 | 4.2 | 12.9 | 32.3 | 11.2 | 20.5 | 30.0 | 34.1 | 30.5 | 26.4 | 6 | 30 | 200 |
| BGA2715 | SOT363 | 5 | 4.3 ²⁾ | 3.0 | 2.6 | -5 | 22 | -9 | 14 | 14.0 | 22.0 | 21 | 19 | 6 | 8 | 200 |
| BGA2716 | SOT363 | 5 | 15.9 ²⁾ | 3.6 | 4.9 | 11 | 24 | 7 | 24 | 24.0 | 24.0 | 24 | 23 | 6 | 25 | 200 |
| BGA2717 | SOT363 | 5 | 8.0 | 3.0 | 2.1 | 1 | 23 | -3 | 20 | 20.0 | 23.0 | 23 | 20 | 6 | 15 | 200 |

■ = New Notes: 1. Upper -3 dB point, to gain at 1 GHz. 2. Optimized parameter 3. Gain = |S₂₁|²

2-stage variable-gain linear amplifier

| Type | Package | @ | | Frequency Range (MHz) | @ 900MHz | | | | @1900 MHz | | | | Limits | | |
|-----------|---------|--------------------|---------------------|-----------------------|------------------------|----------------------|------------------------|------------|------------------------|----------------------|------------------------|------------|--------------------|---------------------|-----------------------|
| | | V _s (V) | I _s (mA) | | Gain ¹ (dB) | DG ² (dB) | P _{1dB} (dBm) | ACPR (dBc) | Gain ¹ (dB) | DG ² (dB) | P _{1dB} (dBm) | ACPR (dBc) | V _s (V) | I _s (mA) | P _{tot} (mW) |
| BGA2031/1 | SOT363 | 3 | 51 | 800-2500 | 24 | 62 | 11 | 49 | 23 | 56 | 13 | 49 | 3.3 | 50 | 200 |

Notes: 1. Gain = GP, power gain. 2. DG = Gain control range

Wideband linear mixer

| Type | Package | @ | | RF Input Freq. Range (MHz) | IF Output Freq. Range (MHz) | @ 880MHz | | | @2450 MHz | | | Limits | | |
|---------|---------|--------------------|---------------------|----------------------------|-----------------------------|----------|------------------------|------------------------|-----------|------------------------|------------------------|--------------------|---------------------|-----------------------|
| | | V _s (V) | I _s (mA) | | | NF (dB) | Gain ¹ (dB) | OIP ₃ (dBm) | NF (dB) | Gain ¹ (dB) | OIP ₃ (dBm) | V _s (V) | I _s (mA) | P _{tot} (mW) |
| BGA2022 | SOT363 | 3 | 51 | 800-2500 | 50-500 | 9 | 5 | 4 | 9 | 6 | 10 | 4 | 20 | 40 |

Notes: 1. Gain = GC, Conversion gain

Low-noise wideband amplifiers

| Type | Package | @ | | @ 900MHz | | | @1800 MHz | | | Gain ² (db) @ | | | | Limits | | |
|-----------------------|---------|--------------------|---------------------|----------|------------------|------------------------|-----------|--------------------|------------------------|--------------------------|-------|---------|---------|--------------------|---------------------|-----------------------|
| | | V _s (V) | I _s (mA) | NF (dB) | Gain (dB) | IIP ₃ (dBm) | NF (dB) | Gain (dB) | IIP ₃ (dBm) | 100 MHz | 1 GHz | 2.6 GHz | 3.0 GHz | V _s (V) | I _s (mA) | P _{tot} (mW) |
| BGA2001 | SOT343R | 2.5 | 4 | 1.3 | 22 ¹⁾ | -7.4 | 1.3 | 19.5 ¹⁾ | -4.5 | 20 | 17.1 | 11.6 | 10.7 | 4.5 | 30 | 135 |
| BGA2003 | SOT343R | 2.5 | 10 ²⁾ | 1.8 | 24 ¹⁾ | -6.5 | 1.8 | 16 ¹⁾ | -4.8 | 26 | 18.6 | 11.1 | 10.1 | 4.5 | 30 | 135 |
| BGA2004 ⁴⁾ | SOT363 | 2.7 | 6 | - | - | - | 1.4 | 18 | -5 | - | - | - | - | 3.3 | 15 | 50 |
| BGA2011 | SOT363 | 3 | 15 | 1.5 | 19 ³⁾ | 10 | - | - | - | 24 | 14.8 | 8 | 6.5 | 4.5 | 30 | 135 |
| BGA2012 | SOT363 | 3 | 7 | - | - | - | 1.7 | 16 ³⁾ | 10 | 22 | 18.2 | 11.6 | 10.5 | 4.5 | 15 | 70 |

Notes: 1. MSG 2. Adjustable bias 3. |S₂₁|² 4. Switched LNA with internal match for 1.8 GHz. Objective Data

General-purpose, med. power ampl. (50 ohm gain blocks)

| Type | Package | @ | | @ 900MHz | | | | @1800 MHz | | | | Gain ² (dB) | f ₁ ¹ (MHz) | Limits | | |
|---------|---------|--------------------|---------------------|----------|------------------------|------------------------|------------------------|-----------|------------------------|---------|------------------------|------------------------|-----------------------------------|---------|--------------------|---------------------|
| | | V _s (V) | I _s (mA) | NF (dB) | Gain ₁ (dB) | OIP ₃ (dBm) | P _{1dB} (dBm) | NF (dB) | Gain ₂ (dB) | NF (dB) | P _{1dB} (dBm) | | | 2.5 GHz | V _s (V) | I _s (mA) |
| BGA6289 | SOT89 | 3.8 | 83 | 3.8 | 15 | 31 | 17 | 4.1 | 13 | 4.1 | 15 | 12 | 4000 | 6 | 120 | 480 |
| BGA6489 | SOT89 | 5.1 | 83 | 3.1 | 20 | 33 | 20 | 3.3 | 16 | 3.3 | 17 | 15 | 4000 | 6 | 120 | 480 |
| BGA6589 | SOT89 | 4.8 | 83 | 3 | 22 | 33 | 21 | 3.3 | 17 | 3.3 | 20 | 15 | 4000 | 6 | 120 | 480 |

Notes: 1 Determined by return loss(>10dB) 3. Gain = |S₂₁|²

2.5 RF MOS transistors

2.5.1 JFETs

N-channel junction field-effect transistors for switching

| Type | Package | V _{DS} (V) | I _G (mA) | CHARACTERISTICS | | | | | | | | | | |
|----------|---------|------------------------|------------------------|--------------------------|-----|---------------------------|-----|----------------------------|-------------------------|-------|-------------------------|-----|--------------------------|-----|
| | | | | I _{DSS} (mA) | | V _{(p)GS} (V) | | R _{DS(ON)} (Ω) | C _{rs} (pF) | | t _{on} (ns) | | t _{off} (ns) | |
| | | | | min | max | min | max | max | min | max | typ | max | typ | max |
| BSR56 | SOT23 | 40 | 50 | 50 | - | 4 | 10 | 25 | - | 5 | - | - | - | 25 |
| BSR57 | SOT23 | 40 | 50 | 20 | 100 | 2 | 6 | 40 | - | 5 | - | - | - | 50 |
| BSR58 | SOT23 | 40 | 50 | 8 | 80 | 0.8 | 4 | 60 | - | 5 | - | - | - | 100 |
| PMBFJ108 | SOT23 | 25 | 50 | 80 | - | 3 | 10 | 8 | - | 15 | 4 | - | 6 | - |
| PMBFJ109 | SOT23 | 25 | 50 | 40 | - | 2 | 6 | 12 | - | 15 | 4 | - | 6 | - |
| PMBFJ110 | SOT23 | 25 | 50 | 10 | - | 0.5 | 4 | 18 | - | 15 | 4 | - | 6 | - |
| PMBFJ111 | SOT23 | 40 | 50 | 20 | - | 3 | 10 | 30 | - | typ.3 | 13 | - | 35 | - |
| PMBFJ112 | SOT23 | 40 | 50 | 5 | - | 1 | 5 | 50 | - | typ.3 | 13 | - | 35 | - |
| PMBFJ113 | SOT23 | 40 | 50 | 2 | - | 0.5 | 3 | 100 | - | typ.3 | 13 | - | 35 | - |
| J108 | SOT54 | 25 | 50 | 80 | - | 3 | 10 | 8 | - | 15 | 4 | - | 6 | - |
| J109 | SOT54 | 25 | 50 | 40 | - | 2 | 6 | 12 | - | 15 | 4 | - | 6 | - |
| J110 | SOT54 | 25 | 50 | 10 | - | 0.5 | 4 | 18 | - | 15 | 4 | - | 6 | - |
| J111 | SOT54 | 40 | 50 | 20 | - | 3 | 10 | 30 | - | typ.3 | 13 | - | 35 | - |
| J112 | SOT54 | 40 | 50 | 5 | - | 1 | 5 | 50 | - | typ.3 | 13 | - | 35 | - |
| J113 | SOT54 | 40 | 50 | 2 | - | 0.5 | 3 | 100 | - | typ.3 | 13 | - | 35 | - |
| PMBF4391 | SOT23 | 40 | 50 | 50 | 150 | 4 | 10 | 30 | - | 3.5 | - | 15 | - | 20 |
| PMBF4392 | SOT23 | 40 | 50 | 25 | 75 | 2 | 5 | 60 | - | 3.5 | - | 15 | - | 35 |
| PMBF4393 | SOT23 | 40 | 50 | 5 | 30 | 0.5 | 3 | 100 | - | 3.5 | - | 15 | - | 50 |

P-channel junction field-effect transistors for switching

| Type | Package | V _{DS} (V) | I _G (mA) | CHARACTERISTICS | | | | | | | | | | |
|----------|---------|------------------------|------------------------|--------------------------|-----|---------------------------|------|----------------------------|-------------------------|-------|-------------------------|-----|--------------------------|-----|
| | | | | I _{DSS} (mA) | | V _{(p)GS} (V) | | R _{DS(ON)} (Ω) | C _{rs} (pF) | | t _{on} (ns) | | t _{off} (ns) | |
| | | | | min | max | min | max | max | min | max | typ | max | typ | max |
| PMBFJ174 | SOT23 | 30 | 50 | 20 | 135 | 5 | 10 | 85 | - | typ.4 | 7 | - | 15 | - |
| PMBFJ175 | SOT23 | 30 | 50 | 7 | 70 | 3 | 6 | 125 | - | typ.4 | 15 | - | 30 | - |
| PMBFJ176 | SOT23 | 30 | 50 | 2 | 35 | 1 | 4 | 250 | - | typ.4 | 35 | - | 35 | - |
| PMBFJ177 | SOT23 | 30 | 50 | 1.5 | 20 | 0.8 | 2.25 | 300 | - | typ.4 | 45 | - | 45 | - |
| J174 | SOT54 | 30 | 50 | 20 | 135 | 5 | 10 | 85 | - | typ.4 | 7 | - | 15 | - |
| J175 | SOT54 | 30 | 50 | 7 | 70 | 3 | 6 | 125 | - | typ.4 | 15 | - | 30 | - |
| J176 | SOT54 | 30 | 50 | 2 | 35 | 1 | 4 | 250 | - | typ.4 | 35 | - | 35 | - |
| J177 | SOT54 | 30 | 50 | 1.5 | 20 | 0.8 | 2.25 | 300 | - | typ.4 | 45 | - | 45 | - |

N-channel junction field-effect transistors

| Type | Package | V _{DS} | I _G | CHARACTERISTICS | | | | | | | |
|---|---------|-----------------|----------------|------------------|------|--------------------|-----|------------------|------|-----------------|------|
| | | | | I _{DSS} | | V _{(p)GS} | | Y _f s | | C _{rs} | |
| | | | | (mA) | (mA) | (V) | (V) | (mS) | (mS) | (pF) | (pF) |
| (V) | (Ma) | min | max | min | max | min | max | min | max | | |
| DC, LF and HF amplifiers | | | | | | | | | | | |
| BF245A | SOT54 | 30 | 10 | 2 | 6.5 | <8 | | 3 | 6.5 | 1.1 | - |
| BF245B | SOT54 | 30 | 10 | 6 | 15 | <8 | | 3 | 6.5 | 1.1 | - |
| BF245C | SOT54 | 30 | 10 | 12 | 25 | <8 | | 3 | 6.5 | 1.1 | - |
| BF545A | SOT23 | 30 | 10 | 2 | 6.5 | 0.4 | 7.5 | 3 | 6.5 | 0.8 | - |
| BF545B | SOT23 | 30 | 10 | 6 | 15 | 0.4 | 7.5 | 3 | 6.5 | 0.8 | - |
| BF545C | SOT23 | 30 | 10 | 12 | 25 | 0.4 | 7.5 | 3 | 6.5 | 0.8 | - |
| BF556A | SOT23 | 30 | 10 | 3 | 7 | 0.5 | 7.5 | 4.5 | | 0.8 | - |
| BF556B | SOT23 | 30 | 10 | 6 | 13 | 0.5 | 7.5 | 4.5 | | 0.9 | - |
| BF556C | SOT23 | 30 | 10 | 11 | 18 | 0.5 | 7.5 | 4.5 | | 0.8 | - |
| Preamplifiers for AM tuners in car radios | | | | | | | | | | | |
| BF861A | SOT23 | 25 | 10 | 2 | 6.5 | 0.2 | 1.0 | 12 | | 2.1 | 2.7 |
| BF861B | SOT23 | 25 | 10 | 6 | 15 | 0.5 | 1.5 | 16 | | 2.1 | 2.7 |
| BF861C | SOT23 | 25 | 10 | 12 | 25 | 0.8 | 2 | 20 | | 2.1 | 2.7 |
| BF862 | SOT23 | 20 | 10 | 13 | 25 | <20 | | 35 | | 2.5 | - |
| RF stages FM portables, car radios, main radios & mixer stages | | | | | | | | | | | |
| BF510 ¹⁾ | SOT23 | 20 | 10 | 0.7 | 3 | typ. 0.8 | | 2.5 | | 0.4 | 0.5 |
| BF511 ¹⁾ | SOT23 | 20 | 10 | 2.5 | 7 | typ. 1.5 | | 4 | | 0.4 | 0.5 |
| BF512 ¹⁾ | SOT23 | 20 | 10 | 6 | 12 | typ. 2.2 | | 6 | | 0.4 | 0.5 |
| BF513 ¹⁾ | SOT23 | 20 | 10 | 10 | 18 | typ. 3 | | 7 | | 0.4 | 0.5 |
| Low-level general purpose amplifiers | | | | | | | | | | | |
| BFR30 | SOT23 | 25 | 5 | 4 | 10 | <5 | | 1 | 4 | 1.5 | - |
| BFR31 | SOT23 | 25 | 5 | 1 | 5 | <2.5 | | 1.5 | 4.5 | 1.5 | - |
| General-purpose amplifiers | | | | | | | | | | | |
| BFT46 | SOT23 | 25 | 5 | 0.2 | 1.5 | <1.2 | | >1 | | 1.5 | - |
| AM input stages UHF/VHF amplifiers | | | | | | | | | | | |
| PMBFJ308 | SOT23 | 25 | 50 | 12 | 60 | 1 | 6.5 | >10 | | 1.3 | 2.5 |
| PMBFJ309 | SOT23 | 25 | 50 | 12 | 30 | 1 | 4 | >10 | | 1.3 | 2.5 |
| PMBFJ310 | SOT23 | 25 | 50 | 24 | 60 | 2 | 6.5 | >10 | | 1.3 | 2.5 |
| PMBFJ620 | SOT363 | 25 | 50 | 24 | 60 | 2 | 6.5 | 10 | | 1.3 | 2.5 |

¹⁾ Asymmetrical

2.5.2 MOSFETs

N-channel, single MOSFETS for switching

| Type | Package | V _{DS} | CHARACTERISTICS | | | | | | | | | | | | | MODE | |
|-------|---------|-----------------|-----------------|------------------|------|--------------------|-----------------|---------------------|-----------------|-----|-----------------|-----|------------------|-----|------------------------------------|------|-------------------------------------|
| | | | I _D | I _{DSS} | | V _{(p)GS} | | R _{DS(ON)} | C _{rs} | | t _{on} | | t _{off} | | S _{21(on)} ² | | S _{21(off)} ² |
| | | | | (V) | (mA) | min | max | min | max | (W) | min | max | typ | max | typ | | max |
| BSS83 | SOT143 | 10 | 50 | - | - | 0.1 ²⁾ | 2 ⁹⁾ | 45 | typ.0.6 | - | 1 | - | 5 | - | - | enh. | |

Silicon RF Switches

| | | | | | | | | | | | | | | | | |
|-----------------------|---------|---|----|---|-------------------|---|-----------------|----|---|---|---|---|---|-----|----|-------|
| BF1107 | SOT23 | 3 | 10 | - | 100 ³⁾ | - | 7 ⁴⁾ | 20 | - | - | - | - | - | 2.5 | 30 | depl. |
| BF1108 ⁵⁾ | SOT143B | 3 | 10 | - | 100 ³⁾ | - | 7 ⁴⁾ | 20 | - | - | - | - | - | 3 | 30 | depl. |
| BF1108R ⁵⁾ | SOT143R | 3 | 10 | - | 100 ³⁾ | - | 7 ⁴⁾ | 20 | - | - | - | - | - | 3 | 30 | depl. |

N-channel, dual-gate MOSFETS

| Type | Package | V _{DS} | CHARACTERISTICS | | | | | | | | | | | | |
|------|---------|-----------------|-----------------|------------------|------|--------------------|-----|-----------------|-----|-----------------|-----------------|-------------|-----|-----|------|
| | | | I _D | I _{DSS} | | V _{(p)GS} | | Y _{fs} | | C _{is} | C _{os} | F @ 800 MHz | VHF | UHF | |
| | | | | (V) | (mA) | min | max | min | max | min | max | typ. | | | typ. |

With external bias

| | | | | | | | | | | | | | | |
|----------|---------|----|----|---|----|---|-------------------|----|---|------|------|-------------------|---|---|
| BF901 | SOT143 | 12 | 30 | 2 | 18 | - | 0.7 ⁶⁾ | 25 | - | 2.35 | 1.4 | 1.7 | X | X |
| BF901R | SOT143R | 12 | 30 | 2 | 18 | - | 0.7 ⁶⁾ | 25 | - | 2.35 | 1.4 | 1.7 | X | X |
| BF908 | SOT143 | 12 | 40 | 3 | 27 | - | 2 | 36 | - | 3.1 | 1.7 | 1.5 | X | X |
| BF908R | SOT143R | 12 | 40 | 3 | 27 | - | 2 | 36 | - | 3.1 | 1.7 | 1.5 | X | X |
| BF908VVR | SOT343R | 12 | 40 | 3 | 27 | - | 2 | 36 | - | 3.1 | 1.7 | 1.5 | X | X |
| BF991 | SOT143 | 20 | 20 | 4 | 25 | - | 2.5 | 10 | - | 2.1 | 1.1 | 0.7 ⁷⁾ | X | - |
| BF992 | SOT143 | 20 | 40 | - | - | - | 1.3 | 20 | - | 4 | 2 | 1.2 ⁷⁾ | X | - |
| BF994S | SOT143 | 20 | 30 | 4 | 20 | - | 2.5 | 15 | - | 2.5 | 1 | 1 ⁷⁾ | X | - |
| BF996S | SOT143 | 20 | 30 | 4 | 20 | - | 2.5 | 15 | - | 2.3 | 0.8 | 1.8 | - | X |
| BF998 | SOT143 | 12 | 30 | 2 | 18 | - | 2.5 | 21 | - | 2.1 | 1.05 | 1 | X | X |
| BF998R | SOT143R | 12 | 30 | 2 | 18 | - | 2.5 | 21 | - | 2.1 | 1.05 | 1 | X | X |
| BF998VVR | SOT343R | 12 | 30 | 2 | 18 | - | 2.5 | 22 | - | 2.1 | 1.05 | 1 | X | X |

Fully internal bias

| | | | | | | | | | | | | | | |
|-----------|---------|----|----|---|----|---|-------------------|----|---|-------------------|-------------------|-----|---|---|
| BF1105 | SOT143 | 7 | 30 | 8 | 16 | - | - | 25 | - | 2.2 ⁸⁾ | 1.2 ⁸⁾ | 1.7 | X | X |
| BF1105R | SOT143R | 7 | 30 | 8 | 16 | - | - | 25 | - | 2.2 ⁸⁾ | 1.2 ⁸⁾ | 1.7 | X | X |
| BF1105WR | SOT343R | 7 | 30 | 8 | 16 | - | - | 25 | - | 2.2 ⁸⁾ | 1.2 ⁸⁾ | 1.7 | X | X |
| BF1109 | SOT143 | 11 | 30 | 8 | 16 | - | 1.2 ⁶⁾ | 24 | - | 2.2 ⁸⁾ | 1.3 ⁸⁾ | 1.5 | X | X |
| BF1109R | SOT143R | 11 | 30 | 8 | 16 | - | 1.2 ⁶⁾ | 24 | - | 2.2 ⁸⁾ | 1.3 ⁸⁾ | 1.5 | X | X |
| BF1109VVR | SOT343R | 11 | 30 | 8 | 16 | - | 1.2 ⁶⁾ | 24 | - | 2.2 ⁸⁾ | 1.3 ⁸⁾ | 1.5 | X | X |

Partly internal bias

| | | | | | | | | | | | | | | |
|------------|---------|---|----|----|----|---|-----------------|----|---|-----|-----|---|---|---|
| BF904(A) | SOT143 | 7 | 30 | 8 | 13 | - | 1 ⁶⁾ | 22 | - | 2.2 | 1.3 | 2 | X | X |
| BF904(A)R | SOT143R | 7 | 30 | 8 | 13 | - | 1 ⁶⁾ | 22 | - | 2.2 | 1.3 | 2 | X | X |
| BF904(A)WR | SOT343R | 7 | 30 | 8 | 13 | - | 1 ⁶⁾ | 22 | - | 2.2 | 1.3 | 2 | X | X |
| BF909(A) | SOT143 | 7 | 40 | 12 | 20 | - | 1 ⁶⁾ | 36 | - | 3.6 | 2.3 | 2 | X | X |
| BF909(A)R | SOT143R | 7 | 40 | 12 | 20 | - | 1 ⁶⁾ | 36 | - | 3.6 | 2.3 | 2 | X | X |
| BF909(A)WR | SOT343R | 7 | 40 | 12 | 20 | - | 1 ⁶⁾ | 36 | - | 3.6 | 2.3 | 2 | X | X |

¹⁾ Asymmetrical

²⁾ V_{GS(th)}

³⁾ I_D

⁴⁾ V_{SG}

⁵⁾ Depletion FET plus diode in one package

⁶⁾ V_{GS(th)}

⁷⁾ @ 200 MHz

⁸⁾ C_{oss}

⁹⁾ C_{ie}

¹⁰⁾ Two equal dual gate MOSFETs in one package

¹¹⁾ Two low noise gain amplifiers in one package

¹²⁾ Transistor A: fully internal bias, transistor B: partly internal bias

¹³⁾ Internal switching function

¹⁴⁾ Transistor A: partly internal bias, transistor B: fully internal bias

N-channel, dual-gate MOSFETS

| Type | Package | V _{DS} | CHARACTERISTICS | | | | | | | | | | | VHF | UHF |
|--------------------------------|---------|-----------------|------------------|------------------|-----|--------------------|-------------------|-----------------|------|-------------------|-------------------|-------------|---|-----|-----|
| | | | I _D | I _{DSS} | | V _{(p)GS} | | Y _{fs} | | C _{is} | C _{os} | F @ 800 MHz | | | |
| | | | | (mA) | min | max | min | max | (mS) | (pF) | (pF) | (dB) | | | |
| (V) | (mA) | | | | | | | | | | typ. | | | | |
| Partly internal bias | | | | | | | | | | | | | | | |
| BF1100 | SOT143 | 14 | 30 | 8 | 13 | - | 1 ⁶⁾ | 24 | - | 2.2 | 1.4 | 2 | X | X | |
| BF1100R | SOT143R | 14 | 30 | 8 | 13 | - | 1 ⁶⁾ | 24 | - | 2.2 | 1.4 | 2 | X | X | |
| BF1100WR | SOT343R | 14 | 30 | 8 | 13 | - | 1 ⁶⁾ | 24 | - | 2.2 | 1.4 | 2 | X | X | |
| BF1101 | SOT143 | 7 | 30 | 8 | 16 | - | 1 ⁶⁾ | 25 | - | 2.2 | 1.2 ⁸⁾ | 1.7 | X | X | |
| BF1101R | SOT143R | 7 | 30 | 8 | 16 | - | 1 ⁶⁾ | 25 | - | 2.2 | 1.2 ⁸⁾ | 1.7 | X | X | |
| BF1101WR | SOT343R | 7 | 30 | 8 | 16 | - | 1 ⁶⁾ | 25 | - | 2.2 | 1.2 ⁸⁾ | 1.7 | X | X | |
| BF1102(R) ¹⁰⁾ | SOT363 | 7 | 40 | 12 | 20 | - | 1.2 ⁶⁾ | 36 | - | 2.8 ⁹⁾ | 1.6 ⁸⁾ | 2 | X | X | |
| BF1201 | SOT143 | 10 | 30 ¹⁾ | 11 | 19 | - | 1.2 ⁶⁾ | 23 | - | 2.6 | 0.9 | 1.9 | X | X | |
| BF1201R | SOT143R | 10 | 30 ¹⁾ | 11 | 19 | - | 1.2 ⁶⁾ | 23 | - | 2.6 | 0.9 | 1.9 | X | X | |
| BF1201WR | SOT343R | 10 | 30 ¹⁾ | 11 | 19 | - | 1.2 ⁶⁾ | 23 | - | 2.6 | 0.9 | 1.9 | X | X | |
| BF1202 | SOT143 | 10 | 30 | 8 | 16 | - | 1.2 ⁶⁾ | 25 | - | 1.7 | 0.85 | 1 | X | X | |
| BF1202R | SOT143R | 10 | 30 | 8 | 16 | - | 1.2 ⁶⁾ | 25 | - | 1.7 | 0.85 | 1 | X | X | |
| BF1202WR | SOT343R | 10 | 30 | 8 | 16 | - | 1.2 ⁶⁾ | 25 | - | 1.7 | 0.85 | 1 | X | X | |
| BF1203 ¹¹⁾ | SOT363 | 10 | 30 | 11 | 19 | - | 1.2 ⁶⁾ | 23 | - | 2.6 | 0.9 | 1.8 | X | X | |
| BF1204 ¹⁰⁾ | SOT363 | 10 | 30 | 8 | 16 | - | 1.2 ⁶⁾ | 25 | - | 1.7 | 0.85 | 1 | X | X | |
| BF1205C ¹¹⁾ (12/13) | SOT363 | 6 | 30 | 14 | 24 | 0.3 | 1 | 26 | 41 | 2.2 | 0.75 | 1.4 | X | - | |
| | | 6 | 30 | 9 | 17 | 0.3 | 1 | 28 | 43 | 2 | 0.85 | 1.4 | - | X | |
| BF1205 ¹¹⁾ (12/13) | SOT363 | 10 | 30 | 8 | 16 | 0.3 | 1.0 | 26 | 40 | 1.8 | 0.75 | 1.2 | X | - | |
| | | 7 | 30 | 8 | 16 | 0.3 | 1.0 | 26 | 40 | 2.0 | 0.85 | 1.4 | - | X | |
| BF1206 ¹¹⁾ | SOT363 | 6 | 30 | 14 | 23 | 0.3 | 1.0 | 33 | 45 | 2.6 | 1.1 | 1.6 | X | - | |
| | | 6 | 30 | 9 | 17 | 0.3 | 1.0 | 29 | 41 | 1.9 | 0.85 | 1.4 | - | X | |
| BF1206F | SOT666 | 6 | 30 | 14 | 23 | 0.3 | 1.0 | 33 | 45 | 2.6 | 1.1 | 1.6 | X | - | |
| | | 6 | 30 | 9 | 17 | 0.3 | 1.0 | 29 | 41 | 1.9 | 0.85 | 1.4 | - | X | |
| BF1207 ¹¹⁾ (12/14) | SOT363 | 6 | 30 | 13 | 23 | 0.3 | 1.0 | 30 typ | - | 2.2 | 0.9 | 1.4 | X | - | |
| | | 6 | 30 | 8 | 18 | 0.3 | 1.0 | 32 typ | - | 2 | 0.85 | 1.4 | - | X | |
| BF1207F ¹¹⁾ (12/14) | SOT666 | 6 | 30 | 13 | 23 | 0.3 | 1.0 | 30 typ | - | 2.2 | 0.9 | 1.4 | X | - | |
| | | 6 | 30 | 8 | 18 | 0.3 | 1.0 | 32 typ | - | 2 | 0.85 | 1.4 | - | X | |
| BF1208 ¹¹⁾ (12/13) | SOT666 | 6 | 30 | 14 | 24 | 0.3 | 1 | 26 | 41 | 2.2 | 0.75 | 1.4 | X | - | |
| | | 6 | 30 | 9 | 17 | 0.3 | 1 | 28 | 43 | 2 | 0.85 | 1.4 | - | X | |
| BF1211 | SOT143 | 6 | 30 | 11 | 19 | 0.3 | 1.0 | 25 | 40 | 2.1 | 0.9 | 1.4 | X | - | |
| BF1211R | SOT143R | 6 | 30 | 11 | 19 | 0.3 | 1.0 | 25 | 40 | 2.1 | 0.9 | 1.4 | X | - | |
| BF1211WR | SOT343 | 6 | 30 | 11 | 19 | 0.3 | 1.0 | 25 | 40 | 2.1 | 0.9 | 1.4 | X | - | |
| BF1212 | SOT143 | 6 | 30 | 8 | 16 | 0.3 | 1.0 | 28 | 43 | 1.7 | 0.9 | 1.1 | - | X | |
| BF1212R | SOT143R | 6 | 30 | 8 | 16 | 0.3 | 1.0 | 28 | 43 | 1.7 | 0.9 | 1.1 | - | X | |
| BF1212WR | SOT343 | 6 | 30 | 8 | 16 | 0.3 | 1.0 | 28 | 43 | 1.7 | 0.9 | 1.1 | - | X | |

■ = New 1) Asymmetrical

2) V_{GS(th)}

3) I_D

4) V_{SG}

5) Depletion FET plus diode in one package

6) V_{GS(th)}

7) @ 200 MHz

8) C_{oss}

9) C_{ig}

10) Two equal dual gate MOSFETs in one package

11) Two low noise gain amplifiers in one package

12) Transistor A: fully internal bias, transistor B: partly internal bias

13) Internal switching function

14) Transistor A: partly internal bias, transistor B: fully internal bias

2.6 RF Modules

CATV types for Chinese (C-types) and Indian market (OM-types):

New in our CATV Hybrid portfolio are two families of products. The C types are specially designed for the Chinese market, fitting two major governmental projects. And the OM types, also called the INDI types, are designed for low end CATV infrastructure networks deployed in India. Both families will be extended in the following months to cover most of those two specific market segments.

C types (China):

- CATV push pulls, chapter 2.6.2.:
BGY588C and BGE788C
- CATV power doubler, chapter 2.6.3.:
BGD712C
- CATV optical receiver, chapter 2.6.4.:
BGO807C

OM types (India):

- CATV push pulls, chapter 2.6.2.:
OM7650 and OM7670

2.6.1 CATV Reverse Hybrids

| Frequency Range | Type Number | Gain (dB) | Slope (dB) | FL | S11/ S22 | CTB | XMOD | CSO | @ Ch | @ Vo (dBmV) | F @ fmax | Itot (mA) |
|-----------------|-------------|-------------|------------|-------|----------|-----|------|-----|------|-------------|----------|-----------|
| 5 - 65 Mhz | BGS67A | 25 - 26 | -0.1 - 0.6 | ± 0.2 | 20/20 | -64 | -54 | - | 4 | 50 | 3.5 | 85 |
| 5 - 75 Mhz | BGY68 | 29.2 - 30.8 | -0.2 - 0.5 | ± 0.2 | 20/20 | -68 | -60 | - | 4 | 50 | 3.5 | 135 |
| 5 - 120 Mhz | BGY66B | 24.5 - 25.5 | -0.2 - 0.5 | ± 0.2 | 20/20 | -66 | -54 | - | 14 | 48 | 5 | 135 |
| | BGY67 | 21.5 - 22.5 | -0.2 - 0.5 | ± 0.2 | 20/20 | -67 | -60 | - | 22 | 50 | 5.5 | 230 |
| 5 - 200 MHz | BGY67A | 23.5 - 24.5 | -0.2 - 0.5 | ± 0.2 | 20/20 | -67 | -59 | - | 22 | 50 | 5.5 | 230 |
| | BGR269 | 34.5 - 35.5 | 0 - 0.6 | ± 0.4 | 20/20 | -57 | -50 | -70 | 28 | 50 | 5.2 | 160 |

2.6.2 CATV Push-Pulls

| Frequency Range | Type Number | Gain (dB) | Slope (dB) | FL | S11/ S22 | CTB | XMOD | CSO | @ Ch | @ Vo (dBmV) | F @ fmax | Itot (mA) |
|-----------------|-------------|-------------|------------|-------|----------|-------|------|-----|------|-------------|----------|-----------|
| 40 - 550 MHz | OM7650 | 33.2 - 35.5 | 0.2 - 2 | - | 10/10 | -45 | - | -57 | 77 | 44 | 8 | 340 |
| | BGY588C | 33.2 - 35.5 | 0.2 - 1.7 | ± 0.5 | 16/16 | -57 | - | -62 | 77 | 44 | 8 | 345 |
| | BGY585A | 17.7 - 18.7 | 0.5 - 2 | ± 0.2 | 20/20 | -59 | -62 | -59 | 77 | 44 | 8 | 240 |
| | BGY587 | 21.5 - 22.5 | 0.2 - 1.5 | ± 0.2 | 20/20 | -57 | -58 | -54 | 77 | 44 | 7 | 240 |
| | BGY587B | 26.2 - 27.8 | 0.5 - 2.5 | ± 0.4 | 20/20 | -57 | -60 | -57 | 77 | 44 | 6.5 | 340 |
| 40 - 600 MHz | BGY588N | 33.5 - 35.5 | 0.5 - 1.5 | ± 0.4 | 20/20 | -57 | -59 | -62 | 77 | 44 | 6 | 340 |
| | BGY685A | 17.7 - 18.7 | 0.5 - 2.2 | ± 0.2 | 20/20 | -55 | -60 | -56 | 85 | 44 | 8.5 | 240 |
| 40 - 750 MHz | BGY687 | 21 - 22 | 0.8 - 2.2 | ± 0.2 | 20/20 | -54 | -54 | -52 | 85 | 44 | 6.5 | 240 |
| | OM7670 | 33.2 - 35.2 | 1/4 | - | 10/8 | -43 | - | -54 | 110 | 44 | 8 | 340 |
| | BGY785A | 18 - 19 | 0 - 2 | ± 0.3 | 20/20 | -53 | -56 | -53 | 110 | 44 | 7 | 240 |
| | BGE788C | 33.2 - 35.2 | 0.3 - 2.3 | ± 0.6 | 16/16 | -49 | - | -52 | 110 | 44 | 8 | 325 |
| | BGY787 | 21 - 22 | 0 - 1.5 | ± 0.5 | 20/20 | -53 | -52 | -53 | 110 | 44 | 6.5 | 240 |
| | BGE787B | 28.5 - 29.5 | 0.2 - 2.2 | ± 0.5 | 20/20 | -50 | -54 | -56 | 110 | 44 | 7 | 320 |
| | BGE788 | 33.5 - 34.5 | 0.5 - 2.5 | ± 0.5 | 20/20 | -49 | -51 | -52 | 110 | 44 | 7 | 320 |
| 40 - 860 MHz | BGY883 | 14.5 - 15.5 | 0 - 2 | ± 0.3 | 20/20 | -61 | -61 | -61 | 49 | 44 | 8.5 | 235 |
| | BGE885 | 16.5 - 17.5 | 0.2 - 1.2 | ± 0.5 | 14/14 | - | - | - | 129 | 59 | 8 | 240 |
| | BGX885N | 16.5 - 17.5 | 0.2 - 1.4 | ± 0.3 | 20/20 | - | - | - | 129 | 59 | 8 | 240 |
| | BGY885A | 18 - 19 | 0 - 2 | ± 0.3 | 20/20 | -61 | -61 | -61 | 49 | 44 | 8 | 240 |
| | BGY885B | 19.5 - 20.5 | 0 - 2 | ± 0.3 | 20/20 | -60 | -60 | -60 | 49 | 44 | 7.5 | 235 |
| | BGY887 | 21 - 22 | 0.2 - 2 | ± 0.3 | 20/20 | -55 | -61 | -57 | 129 | 40 | 6.5 | 235 |
| | CGY887 | 21.2 - 21.8 | 0.6 - 1.4 | ± 0.5 | 20/21 | -59 | -56 | -57 | 132 | 40 | 5.5 | 240 |
| | CGY887A | 25.2 - 25.8 | 0.5 - 1.4 | ± 0.5 | 20/21 | -62 | -56 | -59 | 129 | 40 | 5 | 240 |
| | CGY887B | 27.2 - 27.8 | 0.5 - 1.5 | ± 0.5 | 24/23 | -57.5 | -51 | -58 | 132 | 44 | 5 | 310 |
| | BGY887B | 28.5 - 29.5 | 0.5 - 2.5 | ± 0.5 | 20/20 | -60 | -60 | -60 | 49 | 44 | 6.5 | 340 |
| | BGY888 | 33.5 - 34.5 | 0.5 - 2.5 | ± 0.5 | 20/20 | -60 | -59 | -55 | 49 | 44 | 7 | 340 |
| 40 - 1000 MHz | BGY1085A | 18 - 19 | 0 - 2 | ± 0.3 | 20/20 | -53 | -54 | -56 | 150 | 44 | 7.5 | 240 |

■ = New

2.6.3 CATV Power Doublers

| Frequency Range | Type Number | Gain (dB) | Slope (dB) | FL | S11/S22 | CTB | XMOD | CSO | @ Ch | @ Vo (dBmV) | F @ fmax | Itot (mA) |
|-----------------|--------------|---------------|------------|--------|---------|-------|------|-----|------|-------------|----------|-----------|
| 40 - 550 Mhz | BGD502 | 18 - 19 | 0.2 - 2.2 | ± 0.3 | 20/20 | -65 | -68 | -62 | 77 | 44 | 8 | 435 |
| 40 - 750 MHz | BGD702 | 18 - 19 | 0.2 - 2 | ± 0.5 | 20/20 | -58 | -62 | -58 | 110 | 44 | 8.5 | 435 |
| | BGD702N | 18 - 19 | 0.2 - 2 | ± 0.25 | 20/20 | -58 | -62 | -58 | 110 | 44 | 8.5 | 435 |
| | BGD712 | 18.2 - 18.8 | 0.5 - 1.5 | ± 0.35 | 23/23 | -62 | -63 | -63 | 112 | 44 | 7 | 410 |
| | BGD712C | 18.2 - 18.8 | 0.5 - 1.5 | ± 0.4 | 17/17 | -62 | - | -63 | 112 | 44 | 7 | 410 |
| | BGD704 | 19.5 - 20.5 | 0 - 2 | ± 0.5 | 20/20 | -57 | -61 | -56 | 110 | 44 | 8.5 | 435 |
| | BGD714 | 20 - 20.6 | 0.5 - 1.5 | ± 0.35 | 23/23 | -61 | -62 | -62 | 112 | 44 | 7 | 410 |
| 40 - 860 MHz | BGD885 | 16.5 - 17.5 | 0.2 - 1.6 | ± 0.5 | 20/20 | - | - | - | 129 | 59 | 8 | 450 |
| | BGD802 | 18 - 19 | 0.2 - 2 | ± 0.5 | 20/20 | -54 | -59 | -56 | 129 | 44 | 9 | 410 |
| | BGD812 | 18.2 - 18.8 | 0.4 - 1.4 | ± 0.5 | 23/23 | -58 | -62 | -60 | 132 | 44 | 7.5 | 410 |
| | BGD902 | 18.2 - 18.8 | 0.4 - 1.4 | ± 0.3 | 21/25 | -58 | -62 | -58 | 129 | 44 | 8 | 435 |
| | BGD902L | 18 - 19 | 0.4 - 1.4 | ± 0.3 | 21/21 | -56 | -60 | -59 | 129 | 44 | 7.5 | 380 |
| | CGD923 | 19.25 - 19.75 | 0 - 1 | ± 0.6 | 20/20 | -56 | -57 | -54 | 132 | 48 | 5.5 | 475 |
| | BGD804 | 19.5 - 20.5 | 0.2 - 2 | ± 0.5 | 20/20 | -53 | -61 | -54 | 129 | 44 | 7.5 | 410 |
| | BGD814 | 19.7 - 20.3 | 0.4 - 1.4 | ± 0.5 | 22/25 | -57.5 | -62 | -59 | 132 | 44 | 7.5 | 410 |
| | BGD904 | 19.7 - 20.3 | 0.4 - 1.4 | ± 0.3 | 21/25 | -57.5 | -61 | -58 | 129 | 44 | 7.5 | 435 |
| | BGD904L | 19.7 - 20.3 | 0.4 - 1.4 | ± 0.3 | 21/25 | -55 | -59 | -59 | 129 | 44 | 7.5 | 380 |
| | CGD914 | 19.75 - 20.25 | 0.2 - 1.5 | ± 0.45 | 20/21 | -59.5 | -64 | -50 | 132 | 44 | 4 | 375 |
| | BGD816L | 21.2 - 21.8 | 0.5 - 1.5 | ± 0.5 | 22/25 | -55 | -58 | -56 | 129 | 44 | 7.5 | 375 |
| | BGD906 | 21.2 - 21.8 | 0.5 - 1.5 | ± 0.35 | 22/22 | -57 | -60 | -54 | 129 | 44 | 7.5 | 435 |
| | 40 - 870 MHz | CGD944C | 23 - 25 | 0 - 1 | ± 0.5 | 18/18 | -66 | -58 | -68 | 98 | 48 | 7 |
| CGD942C | | 20.5 - 23 | 0 - 1 | ± 0.5 | 18/18 | -66 | -58 | -68 | 98 | 48 | 7 | 450 |
| 40 - 1000 MHz | CGD1042 | 20.5 - 23 | 0 - 1 | ± 0.3 | 20/23 | -74 | -64 | -69 | 79 | 58.1 | 4.6 | 485 |
| | CGD1044 | 23.5 - 25.5 | 0 - 1 | ± 0.3 | 20/23 | -74 | -64 | -69 | 79 | 58.1 | 4.6 | 485 |

■ = New

2.6.4 CATV Optical Receivers

| Frequency Range | Type Number | Rmin (V/V) | Slope (dB) | FL (dB) | S22 (dB) | d3 | d2 | @fm (MHz) | @Pi (mW) | F @fmax | Conn. | Itot (mA) |
|---------------------------------|-------------|------------|------------|---------|----------|-----|-----|-----------|----------|---------|-------|-----------|
| Optical Reverse Receiver | | | | | | | | | | | | |
| 5 - 300 | BGO387 | 800 | 0 - 2 | ± 0.3 | 16 | -80 | -70 | 54.25 | 1 | 7.5 | -- | 190 |
| Forward Path Receiver | | | | | | | | | | | | |
| 40 - 750 | BGO747 | 800 | 0 - 2 | 1 | 11 | -75 | -63 | 746.5 | 1 | 7 | -- | 205 |
| | BGO747/FC0 | 750 | 0 - 2 | 1 | 11 | -75 | -63 | 746.5 | 1 | 7 | FC | 205 |
| 40 - 870 | BGO807 | 800 | 0 - 2 | 1 | 11 | -71 | -55 | 854.5 | 1 | 8.5 | -- | 205 |
| | BGO807C | 800 | 0 - 2 | 1 | 11 | -71 | -54 | 854.4 | 1 | 8.5 | -- | 205 |
| | BGO807/FC0 | 750 | 0 - 2 | 1 | 11 | -71 | -55 | 854.5 | 1 | 8.5 | FC | 205 |
| | BGO807/SC0 | 750 | 0 - 2 | 1 | 11 | -71 | -55 | 854.5 | 1 | 8.5 | SC | 205 |
| | BGO827 | 800 | 0 - 2 | 1 | 11 | -73 | -57 | 854.5 | 1 | 9 | -- | 205 |
| | BGO827/FC0 | 750 | 0 - 2 | 1 | 11 | -73 | -57 | 854.5 | 1 | 8.5 | FC | 205 |
| | BGO827/SC0 | 750 | 0 - 2 | 1 | 11 | -73 | -57 | 854.5 | 1 | 8.5 | SC | 205 |
| | BGO847 | 800 | 0 - 2 | 1 | 11 | -73 | -63 | 854.5 | 1 | 8 | -- | 205 |

*) NOTES: This table is for reference only; it contains some calculated values that are not guaranteed. For full data please refer to the latest datasheet. Some parts may still be in development. For availability please check the Philips Sales office.

Description:

| | |
|-----------------|--|
| Frequency Range | Minimum and maximum frequency in MHz at which data are characterized |
| @Ch/@Vo | The number of channels and the output voltage at which CTB, XM, CSO and d2 are characterized |
| @fm | Measurement frequency |
| F | Noise Figure in dB or Noise in pA/Sqrt(Hz) |
| FL | Flatness |
| Rmin | Minimum responsivity of optical receivers |

2.7 Fiber-optic transceiver ICs

2.7.1 Laser Drivers

| Part number | Data-rate Mb/s | Package Type | Bare Die | I _{mod} /I _{Bias} [mA] | Dual Loop | Input | V _{cc} | Power Dissipation mW |
|-------------|-------------------|-----------------|-------------|---|--------------|----------|-----------------|----------------------------|
| TZA3047A | 30-1250 | SOT560-1 | X | 100-100 | X | CML/PECL | 3.3 | 420 |
| TZA3047B | 30-1250 | SOT560-1 | X | 100-100 | X | CML/PECL | 3.3_ | 420 |
| TZA3050 | 30-1250 | SOT560-1 | X | 100-100 | - | CML/PECL | 3.3_ | 420 |
| TZA3010B | 30-3200 | SOT560-1 | - | 60-100 | - | CML/PECL | 3.3_ | 420 |
| TZA3011A | 30-3200 | SOT560-1 | X | 100-100 | X | CML/PECL | 3.3 | 420 |
| TZA3011B | 30-3200 | SOT560-1 | X | 100-100 | X | CML/PECL | 3.3_ | 420 |

2.7.2 Trans Impedance Amplifiers

| Part number | Data-rate Mb/s | Package Type | Bare Die | I _n [nA] | E _q Sens [dBm] | RSSI | Output | V _{cc} | Power Dissipation mW |
|-------------|-------------------|-----------------|-------------|------------------------|------------------------------|------|--------|-----------------|----------------------------|
| TZA3036 | 0-155 | die only | X | 10 | -40 | Yes | 50 Ohm | 3.3 | 50 |
| TZA3026 | 0-622 | die only | X | 67 | -32 | Yes | 50 Ohm | 3.3 | 60 |
| TZA3046 | 0-1250 | die only | X | 130 | -29 | Yes | 50 Ohm | 3.3 | 70 |
| TZA3013 | 0-2488 | die only | X | 450 | -24 | - | 50 Ohm | 3.3 | 86 |

■ = New

*) NOTES:

All figures given are typical at 25 deg C

Power dissipation is given for V_{cc} = 3.3 V

E_q sensitivity conditions: Calculated from noise figure using a lowpass bandwidth filter at 0.7x bit rate and a source with an extinction ratio of 10% and a photodiode responsivity of 0.9A/W.

3.3_ means that the output stage is capable of driving 5 V laser applications

3. Design-in tools

This chapter will make it easier to find and get hold of design-in information and materials, with web links or references to the Philips representative / authorized distributor.

3.1 S-Parameters

S-Parameters help you to simulate the behaviour of our devices to your specific adjustments on e.g. voltage, ampere.

3.1.1 Wideband transistors & MMICs

First, click on the type number which takes you directly to the corresponding product information page on the Philips Semiconductor internet.

Second, scroll down on this product information page to find the S-Parameters.

| Wideband | | | MMICs |
|----------|---------|--------|---------|
| BFG135 | BFG94 | BFS17A | BGA2001 |
| BFG198 | BFG97 | BFS17W | BGA2003 |
| BFG21W | BFM505 | BFS25A | BGA2711 |
| BFG31 | BFM520 | BFS505 | BGA2748 |
| BFG35 | BFQ149 | BFS520 | BGA2771 |
| BFG403W | BFQ18A | BFS540 | BGA2776 |
| BFG410W | BFQ19 | BFT25 | BGA2709 |
| BFG425W | BFQ67 | BFT25A | BGA2712 |
| BFG480W | BFQ67W | BFT92 | BGM1011 |
| BFG505 | BFR106 | BFT92W | BGM1012 |
| BFG520 | BFR505 | BFT93 | BGM1013 |
| BFG520W | BFR520 | BFT93W | BGM1014 |
| BFG540 | BFR540 | PBR941 | BGA2715 |
| BFG540W | BFR92A | PBR951 | BGA2716 |
| BFG541 | BFR92AW | PRF947 | BGA2717 |
| BFG590 | BFR93A | PRF957 | BGA2011 |
| BFG591 | BFR93AW | | BGA2012 |
| BFG93A | BFS17 | | |

Or click on the web link(s) below, which takes you to a list of wideband transistors / MMICs with available S-Parameters on the Philips Semiconductor internet.

<http://www.semiconductors.philips.com/models/spicespar/wideband.html>

<http://www.semiconductors.philips.com/models/spicespar/mmics.html>

3.2 Spice models

Spice models help you to create the optimal performance and to understand which external components have a certain influence on that performance.

3.2.1 Wideband transistors

First, click on the type number which takes you directly to the corresponding product information page on the Philips Semiconductor internet.

Second, scroll down on this product information page to find the Spice models.

| | | | |
|------------|------------|---------|--------|
| BFG10 | BFG505/X | BFG93A | BFS17 |
| BFG10/X | BFG505W/X | BFG94 | BFS17A |
| BFG10W/X | BFG520 | BFG97 | BFS17W |
| BFG135 | BFG520/X | BFG97 | BFS25A |
| BFG198 | BFG520/XR | BFM505 | BFS505 |
| BFG21W | BFG520W | BFM520 | BFS520 |
| BFG25A/X | BFG520W/X | BFQ149 | BFS540 |
| BFG25AW/X | BFG540 | BFQ18A | BFT25A |
| BFG31 | BFG540/X | BFQ19 | BFT92 |
| BFG310/XR | BFG540/XR | BFQ67 | BFT92W |
| BFG310W/XR | BFG540W | BFQ67W | BFT93 |
| BFG325/XR | BFG540W/X | BFR106 | BFT93W |
| BFG325W/XR | BFG540W/XR | BFR505 | PBR941 |
| BFG35 | BFG541 | BFR520 | PBR951 |
| BFG403W | BFG590 | BFR540 | PRF947 |
| BFG410W | BFG590/X | BFR92A | PRF949 |
| BFG425W | BFG591 | BFR92AW | PRF957 |
| BFG480W | BFG67/X | BFR93A | |
| BFG505 | BFG92A/X | BFR93AW | |

Or click on the web link below, which takes you to a list of wideband transistors with available Spice models on the Philips Semiconductor internet.

<http://www.semiconductors.philips.com/models/spicespar/wideband.html>

3.2.2 Field effect transistors

First, click on the type number which takes you directly to the corresponding product information page on the Philips Semiconductor internet.

Second, scroll down on this product information page to find the Spice models.

| | | | |
|--------|----------|-------|----------|
| BF245A | BF904 | BFR31 | J177 |
| BF245B | BF904R | BFT46 | PMBF4391 |
| BF245C | BF904WVR | BSR56 | PMBF4392 |
| BF510 | BF908 | BSR57 | PMBF4393 |
| BF511 | BF908R | BSR58 | PMBFJ108 |
| BF512 | BF908WVR | BSS83 | PMBFJ109 |
| BF513 | BF909 | J108 | PMBFJ110 |
| BF545A | BF909R | J109 | PMBFJ111 |
| BF545B | BF909WVR | J110 | PMBFJ112 |
| BF545C | BF992 | J111 | PMBFJ113 |
| BF556A | BF994S | J112 | PMBFJ174 |
| BF556B | BF998 | J113 | PMBFJ175 |
| BF861A | BF998R | J174 | PMBFJ176 |
| BF861B | BF998WVR | J175 | PMBFJ177 |
| BF861C | BFR30 | J176 | |

Or click on the web link below, which takes you to a list of field effect transistors with available Spice models on the Philips Semiconductor internet.

<http://www.semiconductors.philips.com/models/spicespar/fet.html>

3.2.2 Field effect transistors

First, click on the type number which takes you directly to the corresponding product information page on the Philips Semiconductor internet.

Second, scroll down on this product information page to find the Spice models.

| | | | |
|--------|--------|----------|-------|
| BB141 | BB149 | BB200 | BB804 |
| BB142 | BB149A | BB201 | BBY39 |
| BB143 | BB156 | BB202 | |
| BB145 | BB179 | BB207 | |
| BB145B | BB179B | BB208-02 | |

Or click on the web link below, which takes you to a list of varicap diodes with available Spice models on the Philips Semiconductor internet.

<http://www.semiconductors.philips.com/models/spicespar/varicap.html>

3.3 Application notes

http://www.semiconductors.philips.com/markets/mms/documentation/app_notes/

For the application notes we would like to refer you to chapter 1 of this manual. Per application we mentioned the recommended application notes which are available on the internet (with interactive link) or via your local Philips representative or authorized distributor (look at the last chapter: Web Links and Contacts).

3.4 Demo boards

3.4.1 MMIC demo boards are (limited) available via your local Philips representative or authorized distributor (look at the last chapter: Web Links and Contacts).

| | | | |
|---------|---------|---------|---------|
| BGA2001 | BGA2022 | BGA2716 | BGA6289 |
| BGA2003 | BGA2711 | BGA2771 | BGA6489 |
| BGA2012 | BGA2715 | BGA2776 | BGA6589 |

3.4.2 Transimpedance amplifier demo boards are (limited) available via your local Philips representative or authorized distributor (look at the last chapter: Web Links and Contacts).

| |
|---------|
| TZA3026 |
| TZA3036 |
| TZA3046 |

3.5 Samples of products in development

For development samples, please ask your local Philips representative or authorized distributor (look at the last chapter: Web Links and Contacts)

to order the latest versions at the RF development team.

3.6 Samples of released products

Of all released products, samples are available in the sample warehouse. Your local Philips representative (look at the last chapter: Web Links and Contacts), can order these samples to a certain maximum quantity at the online sample store for you.

3.7 Datasheets

Of all released products, datasheets are available on the Philips Semiconductor internet. Simply 'clicking' on a product type (in this manual chapter 1 or 2) takes you to the corresponding product information page on the Philips Semiconductor website.

3.8 Design-in support

If you need special design-in support from our design-in engineers, please ask your local Philips representative or authorized distributor (look at the last chapter: Web Links and Contacts), for your request at the RF development team.

4. Cross-references & Replacements

Philips cross-references:

<http://www.semiconductors.philips.com/products/xref/>

Philips end-of-life:

<http://www.semiconductors.philips.com/products/eol/>

4.1 Cross-references: Manufacturer types versus Philips types

In alphabetical order of manufacturer type

Abbreviations:

| | |
|-------------|---|
| BS diode | Band Switch Diode |
| CATV PD | CATV Power Doubler |
| CATV PPA | CATV Push Pull Amplifier |
| CATV PPA/HG | CATV Push Pull Amplifier High Gain |
| CATV RA | CATV Reverse Amplifier |
| FET | Field Effect Transistor |
| IS | Industry Standard |
| MMIC | Monolithic Microwave Integrated Circuit |
| Varicap | Varicap Diode |
| WB trs 1-4 | Wideband Transistor 1-4 generation |
| WB trs 5-7 | Wideband Transistor 5-7 generation |

| Manufacturer Type | Manufacturer | Philips Type | Product Family |
|-------------------|--------------|--------------|----------------|
| 1SS314 | Toshiba | BA591 | BS diode |
| 1SS356 | Rohm | BA591 | BS diode |
| 1SS381 | Toshiba | BA277 | BS diode |
| 1SS390 | Rohm | BA891 | BS diode |
| 1SV172 | Toshiba | BAP50-04 | Pin diode |
| 1SV214 | Toshiba | BB149 | Varicap |
| 1SV214 | Toshiba | BB149A | Varicap |
| 1SV215 | Toshiba | BB153 | Varicap |
| 1SV228 | Toshiba | BB201 | Varicap |
| 1SV231 | Toshiba | BB152 | Varicap |
| 1SV232 | Toshiba | BB148 | Varicap |
| 1SV233 | Sanyo | BAP70-03 | Pin diode |
| 1SV234 | Sanyo | BAP64-04 | Pin diode |
| 1SV239 | Toshiba | BB145B | Varicap |
| 1SV241 | Sanyo | BAP64-02 | Pin diode |
| 1SV246 | Sanyo | BAP64-04W | Pin diode |
| 1SV247 | Sanyo | BAP70-02 | Pin diode |
| 1SV248 | Sanyo | BAP50-02 | Pin diode |
| 1SV249 | Sanyo | BAP50-04W | Pin diode |
| 1SV250 | Sanyo | BAP50-03 | Pin diode |
| 1SV251 | Sanyo | BAP50-04 | Pin diode |
| 1SV252 | Toshiba | BAP50-04W | Pin diode |
| 1SV254 | Toshiba | BB179 | Varicap |
| 1SV263 | Sanyo | BAP50-02 | Pin diode |
| 1SV264 | Sanyo | BAP50-04W | Pin diode |
| 1SV266 | Sanyo | BAP50-03 | Pin diode |
| 1SV267 | Sanyo | BAP50-04 | Pin diode |
| 1SV269 | Toshiba | BB148 | Varicap |
| 1SV270 | Toshiba | BB156 | Varicap |
| 1SV271 | Toshiba | BAP50-03 | Pin diode |
| 1SV277 | Toshiba | BB142 | Varicap |
| 1SV278 | Toshiba | BB179 | Varicap |
| 1SV279 | Toshiba | BB179 | Varicap |
| 1SV280 | Toshiba | BB145 | Varicap |
| 1SV282 | Toshiba | BB178 | Varicap |
| 1SV282 | Toshiba | BB178 | Varicap |
| 1SV282 | Toshiba | BB187 | Varicap |
| 1SV283 | Toshiba | BB187 | Varicap |
| 1SV283 | Toshiba | BB178 | Varicap |
| 1SV283 | Toshiba | BB178 | Varicap |
| 1SV283 | Toshiba | BB187 | Varicap |
| 1SV284 | Toshiba | BB156 | Varicap |
| 1SV285 | Toshiba | BB142 | Varicap |

| Manufacturer Type | Manufacturer | Philips Type | Product Family |
|-------------------|--------------|--------------|----------------|
| 1SV288 | Toshiba | BB152 | Varicap |
| 1SV290 | Toshiba | BB182 | Varicap |
| 1SV294 | Sanyo | BAP70-03 | Pin diode |
| 1SV305 | Toshiba | BB202 | Varicap |
| 1SV307 | Toshiba | BAP51-03 | Pin diode |
| 1SV308 | Toshiba | BAP51-02 | Pin diode |
| 1SV314 | Toshiba | BB143 | Varicap |
| 1SV329 | Toshiba | BB143 | Varicap |
| 1T362 | Sony | BB149 | Varicap |
| 1T362 A | Sony | BB149A | Varicap |
| 1T363 A | Sony | BB153 | Varicap |
| 1T368 A | Sony | BB148 | Varicap |
| 1T369 | Sony | BB152 | Varicap |
| 1T379 | Sony | BB131 | Varicap |
| 1T397 | Sony | BB152 | Varicap |
| 1T399 | Sony | BB148 | Varicap |
| 1T402 | Sony | BB179B | Varicap |
| 1T402 | Sony | BB179B | Varicap |
| 1T403 | Sony | BB178 | Varicap |
| 1T403 | Sony | BB178 | Varicap |
| 1T404A | Sony | BB187 | Varicap |
| 1T405 A | Sony | BB187 | Varicap |
| 1T406 | Sony | BB182 | Varicap |
| 1T408 | Sony | BB187 | Varicap |
| 2N3330 | IS | J176 | FET |
| 2N3331 | IS | J176 | FET |
| 2N4220 | IS | BF245A | FET |
| 2N4856 | IS | BSR56 | FET |
| 2N4857 | IS | BSR57 | FET |
| 2N4858 | IS | BSR58 | FET |
| 2N5114 | IS | J174 | FET |
| 2N5115 | IS | J175 | FET |
| 2N5116 | IS | J175 | FET |
| 2N5432 | IS | J108 | FET |
| 2N5433 | IS | J108 | FET |
| 2N5434 | IS | J109 | FET |
| 2N5457 | IS | BF245A | FET |
| 2N5458 | IS | BF245A | FET |
| 2N5459 | IS | BF245B | FET |
| 2N5653 | IS | J112 | FET |
| 2N5654 | IS | J111 | FET |
| 2SC4094 | NEC | BFG520/XR | WB trs 1-4 |
| 2SC4095 | NEC | BFG520/XR | WB trs 1-4 |

| Manufacturer Type | Manufacturer | Philips Type | Product Family |
|-------------------|--------------|--------------|----------------|
| 2SC4182 | NEC | BFS17W | WB trs 1-4 |
| 2SC4184 | NEC | BFS17W | WB trs 1-4 |
| 2SC4185 | NEC | BFS17W | WB trs 1-4 |
| 2SC4186 | NEC | BFR92AW | WB trs 1-4 |
| 2SC4226 | NEC | PRF957 | WB trs 1-4 |
| 2SC4227 | NEC | BFQ67W | WB trs 1-4 |
| 2SC4228 | NEC | BFS505 | WB trs 1-4 |
| 2SC4247 | Toshiba | BFR92AW | WB trs 1-4 |
| 2SC4248 | Toshiba | BFR92AW | WB trs 1-4 |
| 2SC4315 | Toshiba | BFG520/XR | WB trs 1-4 |
| 2SC4320 | Toshiba | BFG520/XR | WB trs 1-4 |
| 2SC4321 | Toshiba | BFQ67W | WB trs 1-4 |
| 2SC4325 | Toshiba | BFS505 | WB trs 1-4 |
| 2SC4394 | Toshiba | PRF957 | WB trs 1-4 |
| 2SC4536 | NEC | BFQ19 | WB trs 1-4 |
| 2SC4537 | Renesas | BFR93AW | WB trs 1-4 |
| 2SC4592 | Renesas | BFG520/XR | WB trs 1-4 |
| 2SC4593 | Renesas | BFS520 | WB trs 1-4 |
| 2SC4703 | NEC | BFQ19 | WB trs 1-4 |
| 2SC4784 | Renesas | BFS505 | WB trs 1-4 |
| 2SC4807 | Renesas | BFQ18A | WB trs 1-4 |
| 2SC4842 | Toshiba | BFG540W/XR | WB trs 1-4 |
| 2SC4899 | Renesas | BFS505 | WB trs 1-4 |
| 2SC4900 | Renesas | BFG520/XR | WB trs 1-4 |
| 2SC4901 | Renesas | BFS520 | WB trs 1-4 |
| 2SC4988 | Renesas | BFQ540 | WB trs 1-4 |
| 2SC5011 | NEC | BFG540W/XR | WB trs 1-4 |
| 2SC5012 | NEC | BFG540W/XR | WB trs 1-4 |
| 2SC5065 | Toshiba | PRF957 | WB trs 1-4 |
| 2SC5085 | Toshiba | PRF957 | WB trs 1-4 |
| 2SC5087 | Toshiba | BFG520/XR | WB trs 1-4 |
| 2SC5088 | Toshiba | BFG540W/XR | WB trs 1-4 |
| 2SC5090 | Toshiba | BFS520 | WB trs 1-4 |
| 2SC5092 | Toshiba | BFG520/XR | WB trs 1-4 |
| 2SC5095 | Toshiba | BFS505 | WB trs 1-4 |
| 2SC5107 | Toshiba | BFS505 | WB trs 1-4 |
| 2SC5463 | Toshiba | BFQ67W | WB trs 1-4 |
| 2SC5593 | Renesas | BFG410W | WB trs 5-7 |
| 2SC5594 | Renesas | BFG425W | WB trs 5-7 |
| 2SC5623 | Renesas | BFG410W | WB trs 5-7 |
| 2SC5624 | Renesas | BFG425W | WB trs 5-7 |
| 2SC5631 | Renesas | BFQ540 | WB trs 1-4 |
| 2SJ105GR | IS | J177 | FET |
| 2SK163-K | Renesas | J113 | FET |
| 2SK163-L | Renesas | J113 | FET |
| 2SK163-M | Renesas | J113 | FET |
| 2SK163-N | Renesas | J113 | FET |
| 2SK210BL | Renesas | PMBFJ309 | FET |
| 2SK370BL | Renesas | J109 | FET |
| 2SK370GR | Renesas | J109 | FET |
| 2SK370V | Renesas | J109 | FET |
| 2SK381 | Renesas | J113 | FET |
| 2SK43 | Renesas | J113 | FET |
| 2SK435 | Renesas | J113 | FET |
| 2SK508 | Renesas | PMBFJ308 | FET |
| 3SK290 | Renesas | BFR98WVR | FET |
| BA592 | Infineon | BA591 | BS diode |
| BA592 | Infineon | BA591 | BS diode |
| BA595 | Infineon | BAP70-03 | Pin diode |
| BA597 | Infineon | BAP70-03 | Pin diode |
| BA885 | Infineon | BAP70-03 | Pin diode |
| BA892 | Infineon | BA891 | BS diode |
| BA892 | Infineon | BA891 | BS diode |
| BA895 | Infineon | BAP70-02 | Pin diode |
| BAR14-1 | Infineon | BAP70-03 | Pin diode |
| BAR15-1 | Infineon | BAP70-03 | Pin diode |
| BAR16-1 | Infineon | BAP70-03 | Pin diode |
| BAR17 | Infineon | BAP50-03 | Pin diode |
| BAR60 | Infineon | BAP50-03 | Pin diode |
| BAR61 | Infineon | BAP50-03 | Pin diode |
| BAR63 | Infineon | BAP63-03 | Pin diode |
| BAR63-02L | Infineon | BAP63-02 | Pin diode |
| BAR63-02V | Infineon | BAP63-02 | Pin diode |
| BAR63-02W | Infineon | BAP63-02 | Pin diode |
| BAR63-03W | Infineon | BAP63-03 | Pin diode |

| Manufacturer Type | Manufacturer | Philips Type | Product Family |
|-------------------|--------------|--------------|----------------|
| BAR63-05 | Infineon | BAP63-05W | Pin diode |
| BAR63-05W | Infineon | BAP63-05W | Pin diode |
| BAR64-02V | Infineon | BAP64-02 | Pin diode |
| BAR64-02W | Infineon | BAP64-02 | Pin diode |
| BAR64-03W | Infineon | BAP64-03 | Pin diode |
| BAR64-04 | Infineon | BAP64-04 | Pin diode |
| BAR64-04W | Infineon | BAP64-04W | Pin diode |
| BAR64-05 | Infineon | BAP64-05 | Pin diode |
| BAR64-05W | Infineon | BAP64-05W | Pin diode |
| BAR64-06 | Infineon | BAP64-06 | Pin diode |
| BAR64-06W | Infineon | BAP64-06W | Pin diode |
| BAR65-02V | Infineon | BAP65-02 | Pin diode |
| BAR65-02W | Infineon | BAP65-02 | Pin diode |
| BAR65-03W | Infineon | BAP65-03 | Pin diode |
| BAR66 | Infineon | BAP1321-04 | Pin diode |
| BAR67-02W | Infineon | BAP1321-02 | Pin diode |
| BAR67-03W | Infineon | BAP1321-03 | Pin diode |
| BB304C | Renesas | BF1201WR | FET |
| BB304M | Renesas | BF1201R | FET |
| BB305C | Renesas | BF1201WR | FET |
| BB305M | Renesas | BF1201R | FET |
| BB403M | Renesas | BF909R | FET |
| BB501C | Renesas | BF1202WR | FET |
| BB501M | Renesas | BF1202R | FET |
| BB502C | Renesas | BF1202WR | FET |
| BB502M | Renesas | BF1202R | FET |
| BB503C | Renesas | BF1202WR | FET |
| BB503M | Renesas | BF1202R | FET |
| BB535 | Infineon | BB149 | Varicap |
| BB545 | Infineon | BB149A | Varicap |
| BB555 | Infineon | BB179B | Varicap |
| BB555 | Infineon | BB179B | Varicap |
| BB565 | Infineon | BB179 | Varicap |
| BB601M | Renesas | BF1202 | FET |
| BB639 | Infineon | BB148 | Varicap |
| BB639 | Infineon | BB153 | Varicap |
| BB640 | Infineon | BB152 | Varicap |
| BB641 | Infineon | BB152 | Varicap |
| BB659 | Infineon | BB178 | Varicap |
| BB659 | Infineon | BB178 | Varicap |
| BB664 | Infineon | BB187 | Varicap |
| BB664 | Infineon | BB178 | Varicap |
| BB664 | Infineon | BB178 | Varicap |
| BB669 | Infineon | BB152 | Varicap |
| BB814 | Infineon | BB201 | Varicap |
| BB831 | Infineon | BB131 | Varicap |
| BB833 | Infineon | BB131 | Varicap |
| BB835 | Infineon | BB131 | Varicap |
| BBY51 | Infineon | BB141 | Varicap |
| BBY51-03W | Infineon | BB142 | Varicap |
| BBY53 | Infineon | BB143 | Varicap |
| BBY53-03W | Infineon | BB143 | Varicap |
| BBY58-02V | Infineon | BB202 | Varicap |
| BBY65 | Infineon | BB202 | Varicap |
| BBY66-05 | Infineon | BB200 | Varicap |
| BF1005S | Infineon | BF1105 | FET |
| BF1009S | Infineon | BF1109 | FET |
| BF1009SW | Infineon | BF1109WVR | FET |
| BF2030 | Infineon | BF1101 | FET |
| BF2030R | Infineon | BF1101R | FET |
| BF2030W | Infineon | BF1101WVR | FET |
| BF244A | IS | BF245A | FET |
| BF244B | IS | BF245B | FET |
| BF244C | IS | BF245C | FET |
| BF247A | IS | J108 | FET |
| BF247B | IS | J108 | FET |
| BF247C | IS | J108 | FET |
| BF256A | IS | BF245A | FET |
| BF256B | IS | BF245B | FET |
| BF256C | IS | BF245C | FET |
| BF770A | Infineon | BFR93A | WB trs 1-4 |
| BF771 | Infineon | PBR951 | WB trs 1-4 |
| BF771W | Infineon | BFS540 | WB trs 1-4 |
| BF772 | Infineon | BFG540 | WB trs 1-4 |
| BF775 | Infineon | BFR92A | WB trs 1-4 |

| Manufacturer Type | Manufacturer | Philips Type | Product Family |
|-------------------|--------------|--------------|----------------|
| BF775A | Infineon | BFR92A | WB trs 1-4 |
| BF775W | Infineon | BFR92AW | WB trs 1-4 |
| BF851A | IS | BF861A | FET |
| BF851B | IS | BF861B | FET |
| BF851C | IS | BF861C | FET |
| BF994S | Vishay | BF994S | FET |
| BF996S | Vishay | BF996S | FET |
| BF998 | Vishay | BF998 | FET |
| BF998 | Infineon | BF998 | FET |
| BF998R | Vishay | BF998R | FET |
| BF998RW | Vishay | BF998WR | FET |
| BF998W | Infineon | BF998WR | FET |
| BFG135A | Infineon | BFG135 | WB trs 1-4 |
| BFG193 | Infineon | BFG198 | WB trs 1-4 |
| BFG194 | Infineon | BFG31 | WB trs 1-4 |
| BFG196 | Infineon | BFG541 | WB trs 1-4 |
| BFG19S | Infineon | BFG97 | WB trs 1-4 |
| BFG235 | Infineon | BFG135 | WB trs 1-4 |
| BFP180 | Infineon | BFG505/X | WB trs 1-4 |
| BFP181 | Infineon | BFG67/X | WB trs 1-4 |
| BFP182 | Infineon | BFG67/X | WB trs 1-4 |
| BFP183 | Infineon | BFG520/X | WB trs 1-4 |
| BFP183R | Infineon | BFG520/XR | WB trs 1-4 |
| BFP193 | Infineon | BFG540/X | WB trs 1-4 |
| BFP193W | Infineon | BFG540W/XR | WB trs 1-4 |
| BFP196W | Infineon | BFG540W/XR | WB trs 1-4 |
| BFP280 | Infineon | BFG505/X | WB trs 1-4 |
| BFP405 | Infineon | BFG410W | WB trs 5-7 |
| BFP420 | Infineon | BFG425W | WB trs 5-7 |
| BFP450 | Infineon | BFG480W | WB trs 5-7 |
| BFP81 | Infineon | BFG92A/X | WB trs 1-4 |
| BFP93A | Infineon | BFG93A/X | WB trs 1-4 |
| BFQ193 | Infineon | BFQ540 | WB trs 1-4 |
| BFQ19S | Infineon | BFQ19 | WB trs 1-4 |
| BFR106 | Infineon | BFR106 | WB trs 1-4 |
| BFR180 | Infineon | BFR505 | WB trs 1-4 |
| BFR180W | Infineon | BFS505 | WB trs 1-4 |
| BFR181 | Infineon | BFR520 | WB trs 1-4 |
| BFR181W | Infineon | BFS520 | WB trs 1-4 |
| BFR182 | Infineon | PBR941 | WB trs 1-4 |
| BFR182W | Infineon | PRF947 | WB trs 1-4 |
| BFR183 | Infineon | PBR951 | WB trs 1-4 |
| BFR183W | Infineon | PRF957 | WB trs 1-4 |
| BFR193 | Infineon | PBR951 | WB trs 1-4 |
| BFR193W | Infineon | PRF957 | WB trs 1-4 |
| BFR35AP | Infineon | BFR92A | WB trs 1-4 |
| BFR92AL | Motorola | BFR92A | WB trs 1-4 |
| BFR92P | Infineon | BFR92A | WB trs 1-4 |
| BFR92W | Infineon | BFR92AW | WB trs 1-4 |
| BFR93A | Infineon | BFR93A | WB trs 1-4 |
| BFR93AL | Motorola | BFR93A | WB trs 1-4 |
| BFR93AW | Infineon | BFR93AW | WB trs 1-4 |
| BFS17L | Motorola | BFS17 | WB trs 1-4 |
| BFS17P | Infineon | BFS17A | WB trs 1-4 |
| BFS17W | Infineon | BFS17W | WB trs 1-4 |
| BFS481 | Infineon | BFM505 | WB trs 1-4 |
| BFS483 | Infineon | BFM520 | WB trs 1-4 |
| BFT92 | Infineon | BFT92 | WB trs 1-4 |
| BFT93 | Infineon | BFT93 | WB trs 1-4 |
| BIC701C | Renesas | BF1105VWR | FET |
| BIC701M | Renesas | BF1105R | FET |
| BIC702C | Renesas | BF1105VWR | FET |
| BIC702M | Renesas | BF1105R | FET |
| BIC801M | Renesas | BF1105 | FET |
| BSR111 | IS | PMBFJ111 | FET |
| BSR112 | IS | PMBFJ112 | FET |
| BSR113 | IS | PMBFJ113 | FET |
| BSR174 | IS | PMBFJ174 | FET |
| BSR175 | IS | PMBFJ175 | FET |
| BSR176 | IS | PMBFJ176 | FET |
| BSR177 | IS | PMBFJ177 | FET |
| CA2830 | IS | BGR269 | CATV RA |
| CA901 | IS | BGX885N | CATV PPA |
| CA901A | IS | BGX885N | CATV PPA |
| CA922 | IS | BGD885 | CATV PD |

| Manufacturer Type | Manufacturer | Philips Type | Product Family |
|-------------------|--------------|--------------|----------------|
| CA922A | IS | BGD885 | CATV PD |
| CMY91 | Infineon | BGA2022 | MMIC |
| D5540185 | IS | BGD502 | CATV PD |
| D7540185 | IS | BGD702 | CATV PD |
| D7540200 | IS | BGD704 | CATV PD |
| D8640185 | IS | BGD802 | CATV PD |
| D8640250GT | IS | CGD914 | CATV PD |
| D8640250GTH | IS | CGD923 | CATV PD |
| D8740180GT | IS | CGD923 | CATV PD |
| D8740200GT | IS | CGD923 | CATV PD |
| FSD273TA | Skyworks | BB148 | Varicap |
| FSD273TA | Skyworks | BB178 | Varicap |
| FSD273TA | Skyworks | BB178 | Varicap |
| HBFP0405 | Agilent | BFG410W | WB trs 5-7 |
| HBFP0420 | Agilent | BFG425W | WB trs 5-7 |
| HBFP0450 | Agilent | BFG480W | WB trs 5-7 |
| HSC277 | Renesas | BA277 | BS diode |
| HSMP3800 | Agilent | BAP70-03 | Pin diode |
| HSMP3802 | Agilent | BAP50-04 | Pin diode |
| HSMP3804 | Agilent | BAP50-05 | Pin diode |
| HSMP3810 | Agilent | BAP50-03 | Pin diode |
| HSMP3814 | Agilent | BAP50-05 | Pin diode |
| HSMP381B | Agilent | BAP50-03 | Pin diode |
| HSMP381C | Agilent | BAP50-05 | Pin diode |
| HSMP381F | Agilent | BAP64-05W | Pin diode |
| HSMP3820 | Agilent | BAP1321-03 | Pin diode |
| HSMP3822 | Agilent | BAP1321-04 | Pin diode |
| HSMP3830 | Agilent | BAP64-03 | Pin diode |
| HSMP3832 | Agilent | BAP64-04 | Pin diode |
| HSMP3833 | Agilent | BAP64-06 | Pin diode |
| HSMP3834 | Agilent | BAP64-05 | Pin diode |
| HSMP3860 | Agilent | BAP50-03 | Pin diode |
| HSMP3862 | Agilent | BAP50-04 | Pin diode |
| HSMP3864 | Agilent | BAP50-05 | Pin diode |
| HSMP386B | Agilent | BAP50-02 | Pin diode |
| HSMP386E | Agilent | BAP50-04VW | Pin diode |
| HSMP386L | Agilent | BAP50-05W | Pin diode |
| HSMP3880 | Agilent | BAP51-03 | Pin diode |
| HSMP3890 | Agilent | BAP51-03 | Pin diode |
| HSMP3892 | Agilent | BAP64-04 | Pin diode |
| HSMP3894 | Agilent | BAP64-05 | Pin diode |
| HSMP3895 | Agilent | BAP51-02 | Pin diode |
| HSMP389B | Agilent | BAP51-02 | Pin diode |
| HSMP389C | Agilent | BAP64-04 | Pin diode |
| HSMP389F | Agilent | BAP51-05W | Pin diode |
| HVB14S | Renesas | BAP50-04VW | Pin diode |
| HVC131 | Renesas | BAP65-02 | Pin diode |
| HVC132 | Renesas | BAP51-02 | Pin diode |
| HVC200A | Renesas | BB178 | Varicap |
| HVC200A | Renesas | BB178 | Varicap |
| HVC200A | Renesas | BB179 | Varicap |
| HVC202B | Renesas | BB179B | Varicap |
| HVC202B | Renesas | BB179B | Varicap |
| HVC300A | Renesas | BB182 | Varicap |
| HVC300A | Renesas | BB182 | Varicap |
| HVC300B | Renesas | BB182 | Varicap |
| HVC306A | Renesas | BB187 | Varicap |
| HVC306B | Renesas | BB187 | Varicap |
| HVC355 | Renesas | BB145 | Varicap |
| HVC355B | Renesas | BB145B | Varicap |
| HVC359 | Renesas | BB202 | Varicap |
| HVC363A | Renesas | BB178 | Varicap |
| HVC363A | Renesas | BB178 | Varicap |
| HVC369B | Renesas | BB143 | Varicap |
| HVC376B | Renesas | BB198 | Varicap |
| HVC376B | Renesas | BB202 | Varicap |
| HVD132 | Renesas | BAP51-02 | Pin diode |
| HVU131 | Renesas | BAP65-03 | Pin diode |
| HVU132 | Renesas | BAP51-03 | Pin diode |
| HVU202(A) | Renesas | BB149 | Varicap |
| HVU202(A) | Renesas | BB149A | Varicap |
| HVU300A | Renesas | BB152 | Varicap |
| HVU307 | Renesas | BB148 | Varicap |
| HVU315 | Renesas | BB148 | Varicap |

| Manufacturer Type | Manufacturer | Philips Type | Product Family |
|-------------------|--------------------|--------------|----------------|
| HVU316 | Renesas | BB131 | Varicap |
| HVU363A | Renesas | BB148 | Varicap |
| HVU363A | Renesas | BB153 | Varicap |
| HVU363B | Renesas | BB148 | Varicap |
| INA-51063 | Agilent | BGA2001 | MMIC |
| J270 | IS | J177 | FET |
| J308 | IS | J108 | FET |
| J309 | IS | J109 | FET |
| J310 | IS | J110 | FET |
| JDP2S01E | Toshiba | BAP65-02 | Pin diode |
| JDP2S01U | Toshiba | BAP65-03 | Pin diode |
| JDP2S02T | Toshiba | BAP63-02 | Pin diode |
| JDP2S04E | Toshiba | BAP50-02 | Pin diode |
| KV1470 | Toko | BB200 | Varicap |
| KV1835E | Toko | BB199 | Varicap |
| MA2S077 | IS | BA277 | BS diode |
| MA2S357 | Matsushita | BB187 | Varicap |
| MA2S357 | Matsushita | BB178 | Varicap |
| MA2S357 | Matsushita | BB178 | Varicap |
| MA2S372 | Matsushita | BB179 | Varicap |
| MA2S374 | Matsushita | BB182 | Varicap |
| MA2S01 | Renesas | BB202 | Varicap |
| MA357 | Matsushita | BB153 | Varicap |
| MA366 | Matsushita | BB148 | Varicap |
| MA368 | Matsushita | BB131 | Varicap |
| MA372 | Matsushita | BB149 | Varicap |
| MA372 | Matsushita | BB149A | Varicap |
| MA377 | Matsushita | BB141 | Varicap |
| MA4CP101A | Matsushita | BAP65-03 | Pin diode |
| MA4P274-1141 | Matsushita | BAP51-03 | Pin diode |
| MA4P275-1141 | Matsushita | BAP65-03 | Pin diode |
| MA4P275CK-287 | Matsushita | BAP65-05 | Pin diode |
| MA4P277-1141 | Matsushita | BAP70-03 | Pin diode |
| MA4P278-287 | Matsushita | BAP70-03 | Pin diode |
| MA4P789-1141 | Matsushita | BAP1321-03 | Pin diode |
| MA4P789ST-287 | Matsushita | BAP1321-04 | Pin diode |
| MC7712 | IS | BGY785A | CATV PPA |
| MC7716 | IS | BGY787 | CATV PPA |
| MC7722 | IS | BGY785A | CATV PPA |
| MC7726 | IS | BGY787 | CATV PPA |
| MC7833 | IS | CGY887A | CATV PPA/HG |
| MC7852 | IS | BGY885A | CATV PPA |
| MC7856 | IS | CGY887 | CATV PPA |
| MC7862 | IS | CGD923 | CATV PD |
| MC7866 | IS | BGD816L | CATV PD |
| MHW1224 | Motorola/Freescale | BGY67 | CATV RA |
| MHW1244 | Motorola/Freescale | BGY67A | CATV RA |
| MHW1303LA | Motorola/Freescale | BGR269 | CATV RA |
| MHW1304LA | Motorola/Freescale | BGY68 | CATV RA |
| MHW5182A | Motorola/Freescale | BGY585A | CATV PPA |
| MHW5185B | Motorola/Freescale | BGD502 | CATV PD |
| MHW5222A | Motorola/Freescale | BGY587 | CATV PPA |
| MHW5272A | Motorola/Freescale | BGY587B | CATV PPA/HG |
| MHW5342A | Motorola/Freescale | BGY588N | CATV PPA/HG |
| MHW5342T | Motorola/Freescale | BGY588N | CATV PPA/HG |
| MHW6182 | Motorola/Freescale | BGY585A | CATV PPA |
| MHW6182-6 | Motorola/Freescale | BGY685A | CATV PPA |
| MHW6182T | Motorola/Freescale | BGY585A | CATV PPA |
| MHW6185B | Motorola/Freescale | BGD502 | CATV PD |
| MHW6185T | Motorola/Freescale | BGD502 | CATV PD |
| MHW6205 | Motorola/Freescale | BGD704 | CATV PD |
| MHW6222 | Motorola/Freescale | BGY587 | CATV PPA |
| MHW6222B | Motorola/Freescale | BGY687 | CATV PPA |
| MHW6222T | Motorola/Freescale | BGY587 | CATV PPA |
| MHW6272 | Motorola/Freescale | BGY587B | CATV PPA/HG |
| MHW6272T | Motorola/Freescale | BGY587B | CATV PPA/HG |
| MHW6342 | Motorola/Freescale | BGY588N | CATV PPA/HG |
| MHW6342T | Motorola/Freescale | BGY588N | CATV PPA/HG |
| MHW7182B | Motorola/Freescale | BGY785A | CATV PPA |
| MHW7185C | Motorola/Freescale | BGD712 | CATV PD |
| MHW7205C | Motorola/Freescale | BGD714 | CATV PD |
| MHW7222 | Motorola/Freescale | BGY787 | CATV PPA |
| MHW7222A | Motorola/Freescale | BGY787 | CATV PPA |
| MHW7222B | Motorola/Freescale | BGY787 | CATV PPA |
| MHW7222B | Motorola/Freescale | BGY787 | CATV PPA |

| Manufacturer Type | Manufacturer | Philips Type | Product Family |
|-------------------|--------------------|--------------|----------------|
| MHW7292 | Motorola/Freescale | BGE787B | CATV PPA/HG |
| MHW7292A | Motorola/Freescale | BGE787B | CATV PPA/HG |
| MHW7342 | Motorola/Freescale | BGE788 | CATV PPA/HG |
| MHW8142 | Motorola/Freescale | BGY883 | CATV PPA |
| MHW8182B | Motorola/Freescale | BGY885A | CATV PPA |
| MHW8185 | Motorola/Freescale | BGD902 | CATV PD |
| MHW8185L | Motorola/Freescale | BGD902L | CATV PD |
| MHW8202B | Motorola/Freescale | BGY885B | CATV PPA |
| MHW8205 | Motorola/Freescale | BGD904 | CATV PD |
| MHW8205L | Motorola/Freescale | BGD904L | CATV PD |
| MHW8272A | Motorola/Freescale | CGY887B | CATV PPA/HG |
| MHW8292 | Motorola/Freescale | BGY887B | CATV PPA/HG |
| MHW9182B | Motorola/Freescale | BGY1085A | CATV PPA |
| MHW9187 | Motorola/Freescale | CGD923 | CATV PD |
| MHW9188 | Motorola/Freescale | CGD923 | CATV PD |
| MHWJ5272A | Motorola/Freescale | BGY587B | CATV PPA/HG |
| MHWJ7185A | Motorola/Freescale | BGD712 | CATV PD |
| MHWJ7205A | Motorola/Freescale | BGD714 | CATV PD |
| MHWJ7292 | Motorola/Freescale | BGE787B | CATV PPA/HG |
| MHWJ9182 | Motorola/Freescale | BGY1085A | CATV PPA |
| MMBF4391 | Motorola | PMBF4391 | FET |
| MMBF4392 | Motorola | PMBF4392 | FET |
| MMBF4393 | Motorola | PMBF4393 | FET |
| MMBF4860 | Motorola | PMBFJ112 | FET |
| MMBF5484 | Motorola | BFR31 | FET |
| MMBFJ113 | Motorola | PMBFJ113 | FET |
| MMBFJ174 | Motorola | PMBFJ174 | FET |
| MMBFJ175 | Motorola | PMBFJ175 | FET |
| MMBFJ176 | Motorola | PMBFJ176 | FET |
| MMBFJ177 | Motorola | PMBFJ177 | FET |
| MMBFJ308 | Motorola | PMBFJ308 | FET |
| MMBFJ309 | Motorola | PMBFJ309 | FET |
| MMBFJ310 | Motorola | PMBFJ310 | FET |
| MMBFU310 | Motorola | PMBFJ310 | FET |
| MMBR5031L | Motorola | BFS17 | WB trs 1-4 |
| MMBR5179L | Motorola | BFS17A | WB trs 1-4 |
| MMBR571L | Motorola | PBR951 | WB trs 1-4 |
| MMBR901L | Motorola | BFR92A | WB trs 1-4 |
| MMBR911L | Motorola | BFR93A | WB trs 1-4 |
| MMBR920L | Motorola | BFR93A | WB trs 1-4 |
| MMBR931L | Motorola | BFT25A | WB trs 1-4 |
| MMBR941BL | Motorola | PBR941 | WB trs 1-4 |
| MMBR941L | Motorola | PBR941 | WB trs 1-4 |
| MMBR951AL | Motorola | PBR951 | WB trs 1-4 |
| MMBR951L | Motorola | PBR951 | WB trs 1-4 |
| MMBV105GLT1 | ON Semicond. | BB156 | Varicap |
| MMBV109LT1 | ON Semicond. | BB148 | Varicap |
| MPF102 | IS | BF245A | FET |
| MPF970 | IS | J174 | FET |
| MPF971 | IS | J176 | FET |
| MRF577 | Motorola | PRF957 | WB trs 1-4 |
| MRF5811L | Motorola | BFG93A/X | WB trs 1-4 |
| MRF917 | Motorola | BFQ67W | WB trs 1-4 |
| MRF927 | Motorola | BFS25A | WB trs 1-4 |
| MRF9411L | Motorola | BFG520/X | WB trs 1-4 |
| MRF947 | Motorola | BFS520 | WB trs 1-4 |
| MRF947A | Motorola | PRF947 | WB trs 1-4 |
| MRF9511L | Motorola | BFG540/X | WB trs 1-4 |
| MRF957 | Motorola | PRF957 | WB trs 1-4 |
| MT4S34U | Toshiba | BFG410W | WB trs 5-7 |
| PRF947B | Motorola | PRF947 | WB trs 1-4 |
| PZFJ108 | IS | J108 | FET |
| PZFJ109 | IS | J109 | FET |
| PZFJ110 | IS | J110 | FET |
| R0605250L | IS | BGY66B | CATV RA |
| R0605300L | IS | BGY68 | CATV RA |
| R0605300L | IS | BGY68 | CATV RA |
| R2005240 | IS | BGY67A | CATV RA |
| R2005240 | IS | BGY67A | CATV RA |
| R2005350L | IS | BGR269 | CATV RA |
| RN142G | Rohm | BAP1321-03 | Pin diode |
| RN142S | Rohm | BAP1321-02 | Pin diode |
| RN731V | Rohm | BAP50-03 | Pin diode |
| RN739D | Rohm | BAP50-04 | Pin diode |
| RN739F | Rohm | BAP50-04W | Pin diode |

| Manufacturer Type | Manufacturer | Philips Type | Product Family |
|-------------------|--------------|--------------|----------------|
| S505T | Vishay | BF1101 | FET |
| S505TR | Vishay | BF1101R | FET |
| S505TRW | Vishay | BF1101VWR | FET |
| S5540220 | IS | BGY587 | CATV PPA |
| S595T | Vishay | BF1105 | FET |
| S595TR | Vishay | BF1105R | FET |
| S595TRW | Vishay | BF1105VWR | FET |
| S7540185 | IS | BGY785A | CATV PPA |
| S7540215 | IS | BGY787 | CATV PPA |
| S8740190 | IS | BGD812 | CATV PD |
| S8740220 | IS | BGD814 | CATV PD |
| S8740230 | IS | BGD816L | CATV PD |
| S949T | Vishay | BF1109 | FET |
| S949TR | Vishay | BF1109R | FET |
| S949TRW | Vishay | BF1109VWR | FET |
| S974T | Vishay | BF1109 | FET |
| S974TR | Vishay | BF1109R | FET |
| S974TRW | Vishay | BF1109VWR | FET |
| SMP1302-004 | Skyworks | BAP50-05 | Pin diode |
| SMP1302-005 | Skyworks | BAP50-04 | Pin diode |
| SMP1302-011 | Skyworks | BAP50-03 | Pin diode |
| SMP1302-074 | Skyworks | BAP50-05W | Pin diode |
| SMP1302-075 | Skyworks | BAP50-04W | Pin diode |
| SMP1302-079 | Skyworks | BAP50-02 | Pin diode |
| SMP1304-001 | Skyworks | BAP70-03 | Pin diode |
| SMP1304-011 | Skyworks | BAP70-03 | Pin diode |
| SMP1307-001 | Skyworks | BAP70-03 | Pin diode |
| SMP1307-011 | Skyworks | BAP70-03 | Pin diode |
| SMP1320-004 | Skyworks | BAP65-05 | Pin diode |
| SMP1320-011 | Skyworks | BAP65-03 | Pin diode |
| SMP1320-074 | Skyworks | BAP65-05W | Pin diode |
| SMP1321-001 | Skyworks | BAP1321-03 | Pin diode |
| SMP1321-005 | Skyworks | BAP1321-04 | Pin diode |
| SMP1321-011 | Skyworks | BAP1321-03 | Pin diode |
| SMP1321-075 | Skyworks | BAP1321-04 | Pin diode |
| SMP1321-079 | Skyworks | BAP1321-02 | Pin diode |
| SMP1322-004 | Skyworks | BAP65-05 | Pin diode |
| SMP1322-011 | Skyworks | BAP65-03 | Pin diode |
| SMP1322-074 | Skyworks | BAP65-05W | Pin diode |
| SMP1322-079 | Skyworks | BAP65-02 | Pin diode |
| SMP1340-011 | Skyworks | BAP63-03 | Pin diode |
| SMP1340-079 | Skyworks | BAP63-02 | Pin diode |
| SMP1352-011 | Skyworks | BAP64-03 | Pin diode |
| SMP1352-079 | Skyworks | BAP64-02 | Pin diode |
| SMV1235-004 | Skyworks | BB181 | Varicap |
| SMV1236-004 | Skyworks | BB156 | Varicap |
| SMV1263-079 | Skyworks | BB143 | Varicap |

| Manufacturer Type | Manufacturer | Philips Type | Product Family |
|-------------------|--------------|--------------|----------------|
| SST111 | IS | PMBFJ111 | FET |
| SST112 | IS | PMBFJ112 | FET |
| SST113 | IS | PMBFJ113 | FET |
| SST174 | IS | PMBFJ174 | FET |
| SST175 | IS | PMBFJ175 | FET |
| SST176 | IS | PMBFJ176 | FET |
| SST177 | IS | PMBFJ177 | FET |
| SST201 | IS | BFT46 | FET |
| SST202 | IS | BFR31 | FET |
| SST203 | IS | BFR30 | FET |
| SST308 | IS | PMBFJ308 | FET |
| SST309 | IS | PMBFJ309 | FET |
| SST310 | IS | PMBFJ310 | FET |
| SST4391 | IS | PMBF4391 | FET |
| SST4392 | IS | PMBF4392 | FET |
| SST4393 | IS | PMBF4393 | FET |
| SST4856 | IS | BSR56 | FET |
| SST4857 | IS | BSR57 | FET |
| SST4859 | IS | BSR56 | FET |
| SST4860 | IS | BSR57 | FET |
| SST4861 | IS | BSR58 | FET |
| SVC201SPA | Sanyo | BB187 | Varicap |
| TMPPF4091 | IS | PMBF4391 | FET |
| TMPPF4092 | IS | PMBF4392 | FET |
| TMPPF4093 | IS | PMBF4393 | FET |
| TMPPF4391 | IS | PMBF4391 | FET |
| TMPPF4392 | IS | PMBF4392 | FET |
| TMPPF4393 | IS | PMBF4393 | FET |
| TMPPFB246A | IS | BSR56 | FET |
| TMPPFB246B | IS | BSR57 | FET |
| TMPPFB246C | IS | BSR58 | FET |
| TMPPFJ111 | IS | PMBFJ111 | FET |
| TMPPFJ112 | IS | PMBFJ112 | FET |
| TMPPFJ113 | IS | PMBFJ113 | FET |
| TMPPFJ174 | IS | PMBFJ174 | FET |
| TMPPFJ175 | IS | PMBFJ175 | FET |
| TMPPFJ176 | IS | PMBFJ176 | FET |
| TMPPFJ177 | IS | PMBFJ177 | FET |
| TSDF54040 | Vishay | BF1102 | FET |
| uPC2709 | NEC | BGA2709 | MMIC |
| uPC2711 | NEC | BGA2711 | MMIC |
| uPC2712 | NEC | BGA2712 | MMIC |
| uPC2745 | NEC | BGA2001 | MMIC |
| uPC2746 | NEC | BGA2001 | MMIC |
| uPC2748 | NEC | BGA2748 | MMIC |
| uPC2771 | NEC | BGA2771 | MMIC |
| uPC8112 | NEC | BGA2022 | MMIC |

4.2 Cross-references: Philips discontinued types versus Philips replacement types

In alphabetical order of Philips discontinued type

Abbreviations:

| | |
|----------|-------------------------------------|
| BS diode | Band Switch Diode |
| CATV | Community Antenna Television System |
| FET | Field Effect Transistor |
| Varicap | Varicap Diode |
| WB trs | Wideband Transistor |
| OM | Optical Module |

| Philips discontinued type | Product family | Philips replacement type |
|---------------------------|----------------|--------------------------|
| BA277-01 | BS diode | BA277 |
| BAP142L | Pin diode | BAP142LX |
| BAP51-01 | Pin diode | BAP51LX |
| BAP51L | Pin diode | BAP51LX |
| BAP55L | Pin diode | BAP55LX |
| BB140-01 | Varicap | BB140LX |
| BB140L | Varicap | BB140LX |
| BB145B-01 | Varicap | BB145B |
| BB151 | varicap | BB187 |
| BB157 | varicap | BB135 |
| BB178L | Varicap | BB178LX |
| BB179BL | Varicap | BB179BLX |
| BB179L | Varicap | BB179LX |
| BB181L | Varicap | BB181LX |
| BB182B | Varicap | BB182 |
| BB182B | Varicap | BB182 |
| BB182L | Varicap | BB182LX |
| BB187L | Varicap | BB187LX |
| BB190 | Varicap | BB149 |
| BB202L | Varicap | BB202LX |
| BBY42 | Varicap | BBY40 |
| BF1203 | FET | BF1203 |
| BF689K | WB trs | BFS17 |
| BF763 | WB trs | BFS17 |
| BF851A | FET | BF861A |
| BF851A | FET | BF861A |
| BF851B | FET | BF851B |
| BF851B | FET | BF851B |
| BF851C | FET | BF861C |
| BF851C | FET | BF861C |
| BF992/01 | FET | BF992 |
| BFC505 | WB trs | BFM505 |
| BFC520 | WB trs | BFM520 |
| BFET505 | WB trs | BFM505 |
| BFET520 | WB trs | BFM520 |
| BFG17A | WB trs | BFS17A |
| BFG197 | WB trs | BFG198 |
| BFG197/X | WB trs | BFG198 |
| BFG25AW/XR | WB trs | BFG25AW/X |
| BFG410W/CA | WB trs | BFG410W |
| BFG425W/CA | WB trs | BGF425W |
| BFG425W/CA | WB trs | BGF425W |
| BFG505/XR | WB trs | BFG505/X |
| BFG505W/XR | WB trs | BFG505W/X |
| BFG520W/XR | WB trs | BFG520W/X |
| BFG590/XR | WB trs | BFG590/X |
| BFG590W | WB trs | BFG590W/X |
| BFG590W/XR | WB trs | BFG590W/X |
| BFG67/XR | WB trs | BFG67 |
| BFG92A | WB trs | BFG92A/X |
| BFG92A/XR | WB trs | BFG92A/X |
| BFG93A/XR | WB trs | BFG93A/X |
| BFR92 | WB trs | BFR92A |
| BFR92AR | WB trs | BFR92A |
| BFR92AT | WB trs | BFR92AW |
| BFR93 | WB trs | BFR92A |
| BFR93AT | WB trs | BFR93AW |
| BFR93R | WB trs | BFR93 |
| BFU510 | WB trs | CFH705W |
| BFU540 | WB trs | CFH705W |
| BGA2031 | WB trs | BGA2031/1 |
| BGD102/02 | CATV | BGD502 |
| BGD102/04 | CATV | BGD502 |

| Philips discontinued type | Product family | Philips replacement type |
|---------------------------|----------------|--------------------------|
| BGD104 | CATV | BGD704 |
| BGD104/04 | CATV | BGD704 |
| BGD502/01 | CATV | BGD502 |
| BGD502/01 | CATV | BGD502 |
| BGD502/01 | CATV | BGD502 |
| BGD502/01 | CATV | BGD502 |
| BGD502/03 | CATV | BGD502 |
| BGD502/03 | CATV | BGD502 |
| BGD502/05 | CATV | BGD502 |
| BGD502/07 | CATV | BGD502 |
| BGD502/6M | CATV | BGD702 |
| BGD502/C7 | CATV | BGD502 |
| BGD502/R | CATV | BGD502 |
| BGD504 | CATV | BGD704 |
| BGD504/01 | CATV | BGD704 |
| BGD504/02 | CATV | BGD704 |
| BGD504/09 | CATV | BGD704 |
| BGD602 | CATV | BGD702 |
| BGD602/02 | CATV | BGD702 |
| BGD602/07 | CATV | BGD702 |
| BGD602/09 | CATV | BGD702 |
| BGD602/14 | CATV | BGD702 |
| BGD602D | CATV | BGD712 |
| BGD702D | CATV | BGD712 |
| BGD702D/08 | CATV | BGD712 |
| BGD704/01 | CATV | BGD704 |
| BGD704/07S | CATV | BGD704 |
| BGD704/S9 | CATV | BGD704 |
| BGD704N | CATV | BGD714 |
| BGD802/09 | CATV | BGD802 |
| BGD802N | CATV | BGD812 |
| BGD802N | CATV | BGD812 |
| BGD802N/07 | CATV | BGD812 |
| BGD802N/07 | CATV | BGD812 |
| BGD804N | CATV | BGD814 |
| BGD804N | CATV | BGD814 |
| BGD804N/02 | CATV | BGD814 |
| BGD804N/02 | CATV | BGD814 |
| BGD902/07 | CATV | BGD902 |
| BGD904/02 | CATV | BGD904 |
| BGD904/07 | CATV | BGD904 |
| BGD906/02 | CATV | BGD906 |
| BGE67BO | CATV | BGO387 |
| BGE67BO | CATV | BGO387 |
| BGE847BO | CATV | BGO827 |
| BGE847BO | CATV | BGO827 |
| BGE847BO | CATV | BGO827 |
| BGE847BO/FC | CATV | BGO827/FC0 |
| BGE847BO/FC0 | CATV | BGO827/FC0 |
| BGE847BO/FC0 | CATV | BGO827/FC0 |
| BGE847BO/FC1 | CATV | BGO827/FC0 |
| BGE847BO/SC | CATV | BGO827/SC0 |
| BGE847BO/SC0 | CATV | BGO827/SC0 |
| BGE847BO/SC0 | CATV | BGO827/SC0 |
| BGE887BO | CATV | BGO827 |
| BGE887BO/FC | CATV | BGO827/FC0 |
| BGE887BO/FC1 | CATV | BGO827/FC0 |
| BGE887BO/SC | CATV | BGO827/SC0 |
| BGO747/SC0 | CATV | BGO747 |
| BGO847/01 | CATV | BGO847 |
| BGO847/01 | CATV | BGO847 |
| BGO847/FC0 | CATV | BGO827/FC0 |
| BGO847/FC0 | CATV | BGO827/FC0 |
| BGO847/FC01 | CATV | BGO827/FC0 |


| Philips discontinued type | Product family | Philips replacement type |
|---------------------------|----------------|--------------------------|
| BGO847/FC01 | CATV | BGO827/FC0 |
| BGO847/SC0 | CATV | BGO827/SC0 |
| BGQ34/01 | WB | BFG35 |
| BGU2003 | WB trs | BGA2003 |
| BGX885/02 | CATV | BGX885N |
| BGY1085A/07 | CATV | BGY1085A |
| BGY584A | CATV | BGY585A |
| BGY585A/01 | CATV | BGY585A |
| BGY586 | CATV | BGY587 |
| BGY586/05 | CATV | BGY587 |
| BGY587/01 | CATV | BGY587 |
| BGY587/01 | CATV | BGY587 |
| BGY587/02 | CATV | BGY587 |
| BGY587/02 | CATV | BGY587 |
| BGY587/07 | CATV | BGY587 |
| BGY587/09 | CATV | BGY587 |
| BGY587B/01 | CATV | BGY587B |
| BGY587B/02 | CATV | BGY587B |
| BGY587B/09 | CATV | BGY587B |
| BGY588 | CATV | BGY588N |
| BGY588/04 | CATV | BGY588N |
| BGY66B/04 | CATV | BGY66B |
| BGY67/04 | CATV | BGY67 |
| BGY67/09 | CATV | BGY67 |
| BGY67/14 | CATV | BGY67 |
| BGY67/19 | CATV | BGY67 |
| BGY67A/04 | CATV | BGY67A |
| BGY67A/14 | CATV | BGY67A |
| BGY67BO | CATV | BGO387 |
| BGY68/01 | CATV | BGY68 |
| BGY685A/07 | CATV | BGY685A |
| BGY685AD | CATV | BGY785A |
| BGY685AD | CATV | BGY785A |
| BGY685AL | CATV | BGY785A |
| BGY687/07 | CATV | BGY687 |
| BGY687/14 | CATV | BGY687 |
| BGY687B | CATV | BGE787B |
| BGY687B/02 | CATV | BGE787B |
| BGY785A/07 | CATV | BGY785A |
| BGY785A/09 | CATV | BGY785A |
| BGY785AD | CATV | BGY785A |
| BGY785AD/06 | CATV | BGY785A |
| BGY785AD/8M | CATV | BGY885A |
| BGY785AD/8M | CATV | BGY885A |
| BGY787/02 | CATV | BGY787 |
| BGY787/07 | CATV | BGY787 |
| BGY787/09 | CATV | BGY787 |
| BGY847BO | CATV | BGO827 |
| BGY847BO/SC | CATV | BGO827/SC0 |
| BGY84A | CATV | BGY585A |

| Philips discontinued type | Product family | Philips replacement type |
|---------------------------|----------------|--------------------------|
| BGY84A/04 | CATV | BGY585A |
| BGY84A/05 | CATV | BGY585A |
| BGY85 | CATV | BGY585A |
| BGY85A | CATV | BGY585A |
| BGY85A/04 | CATV | BGY585A |
| BGY85A/05 | CATV | BGY585A |
| BGY85H/01 | CATV | BGY585A |
| BGY86 | CATV | BGY587 |
| BGY86/05 | CATV | BGY587 |
| BGY87 | CATV | BGY587 |
| BGY87/J1 | CATV | BGY587 |
| BGY87B | CATV | BGY587B |
| BGY88 | CATV | BGY588N |
| BGY88/04 | CATV | BGY588N |
| BGY88/04 | CATV | BGY588N |
| BGY88/07 | CATV | BGY588N |
| BGY887/02 | CATV | BGY887 |
| BGY887BO | CATV | BGO827 |
| BGY887BO/FC | CATV | BGO827/FC0 |
| BGY887BO/FC1 | CATV | BGO827/FC0 |
| BGY887BO/SC | CATV | BGO827/SC0 |
| ON4520/09 | CATV | BGY687 |
| ON4520/2 | CATV | BGY687 |
| ON4594/M5 | CATV | BGY585A |
| ON4749 | CATV | BGY588N |
| ON4749 | CATV | BGY588N |
| ON4831-2 | CATV | BGY885A |
| ON4869 | CATV | BGY587 |
| ON4876 | CATV | BGY1085A |
| ON4890 | CATV | BGD712 |
| ON4890 | CATV | BGD712 |
| ON4990 | CATV | BGD885 |
| OQ2545 | OM | TZA3011 |
| OQ2545B | OM | TZA3011 |
| PMBT3640/AT | WB trs | BFS17 |
| PN4392 | FET | PMBF4392 |
| PN4393 | FET | PMBF4393 |
| SA5223 | OM | TZA3036 |
| TZA3001 | OM | TZA3047 |
| TZA3001 | OM | TZA3047 |
| TZA3023 | OM | TZA3026 |
| TZA3031 | OM | TZA3047 |
| TZA3031 | OM | TZA3047 |
| TZA3033 | OM | TZA3036 |
| TZA3041 | OM | TZA3047 |
| TZA3042B | OM | TZA3047 |
| TZA3043 | OM | TZA3046 |
| TZA3043B | OM | TZA3046 |
| XSA5223 | OM | TZA3036 |
| XSA5223 | OM | TZA3036 |

5. High performance miniature BAW filters and duplexers

Bulk Acoustic Wave (BAW) filters and duplexers for Front-End Modules and Cellular Phones

Bulk Acoustic Wave filters provide high performance, ultra small size solutions for next generation integrated cellular phones. Together with Philips patented Chip Scale Package this allows for seamless integration of BAW filters into RF front-end modules.

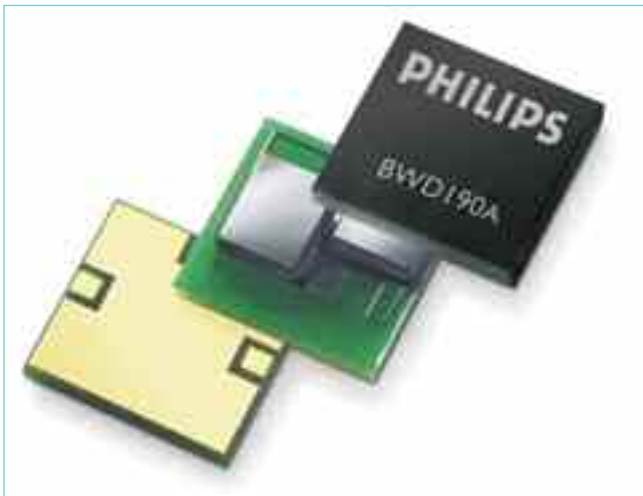

The Philips series of high-performance Bulk Acoustic Wave (BAW) filters and duplexers is optimized for (W-)CDMA/GSM cellular phones. Available in Philips-patented Chip Scale Packaging (CSP), they provide superior performance in an ultra-small size.

Compared to Surface Acoustic Wave (SAW) filters, BAW typically offers superior power handling, enhanced ESD robustness, smaller size, reduced in-band insertion loss and increased steepness of the filter skirts in lower and upper transition bands. BAW filters also offer less center frequency drift versus temperature change and are more suitable for applications at frequencies ranging from 1 to 20 GHz.

High-performance BAW filters & Duplexers

Designed for easy integration into front-end modules and delivering low insertion loss and high selectivity, Philips BAW filters and duplexers support receive (Rx) and transmit (Tx) applications in (W-)CDMA and GSM phones:

- US PCS (1900 MHz)
 - BWT190(A) high-rejection Tx interstage filter
 - BWD190(A) duplexer
- UMTS (2100MHz)
 - BWD210(A) BAW duplexer
- Bluetooth/WLAN antenna filter (2400 MHz)
 - BWR240(A) antenna filter

Higher integration in an ultra-small, package-less chip scale format

Using the patented Chip Scale Package technique, Philips is able to maximize performance while minimizing footprint. The Chip Scale Packaged Tx BAW filters for US PCS duplexer, for example, are as small as 1.9x1.4 mm².

The BAW devices are typically less than 450 µm in height after solder reflow and are suitable for flip-chip assembly.

Features

- High performance BAW filters and duplexers
 - Low insertion loss
 - High stopband rejections/isolations
 - Low temperature drift
 - Superior power handling
 - Enhanced ESD robustness
- Ultra-small, Philips-patented Chip Scale Package
 - Ultra-small footprint (as small as 1.5mm²)
 - Very low profile (height < 450 µm after solder reflow)
- Flip Chip assembly

Customer benefits

- Optimized for:
 - 1900 MHz US PCS (W-)CDMA
 - UMTS
 - Bluetooth/WLAN
- Easy package-less chip scale integration into RF front-end module
- Integrated balun option via Philips passive integration process technology
- Reduced PCB implementation size
- Ideal for high frequency applications
- Superior performance in very small size


Philips Semiconductors BAW devices

| Type | Description | Freq. (MHz) | Size (mm ²) Chip Scale | Molded |
|-----------|-----------------------------|-------------|---------------------------------------|-----------|
| BWT190(A) | PCS Tx interstage filter | 1900 | 1.7 x 1.0 | 2.0 x 1.6 |
| BWD190(A) | PCS duplexer | 1900 | Tx: 1.9 x 1.4 Rx: 2.2 x 1.3 | 3.8 x 3.8 |
| BWD210(A) | UMTS duplexer | 2100 | Tx: 1.9 x 1.6 Rx: 2.2 x 1.5 | 3.8 x 3.8 |
| BWR240(A) | Bluetooth/ WLAN filter | 2400 | 1.5 x 1.0 | n.a. |

Electrical characteristics of the BWD190A,
 $T_j = 25^\circ\text{C}$, $Z_0 = 50\Omega$

| Parameter | Band | Frequency (MHz) | Min (dB) | Max (dB) |
|---------------------|---------|-----------------|----------|----------|
| Insertion Loss | Tx | 1850 – 1910 | - | 3.5 |
| | Rx | 1930 – 1990 | - | 3.8 |
| Ripple | Tx | | - | 2 |
| Rejection | | | - | - |
| Tx to Antenna | Rx | | 41 | - |
| Rx to Antenna | Tx | | 50 | - |
| Return Loss | Tx | | 8 | - |
| | Rx | | 8 | - |
| | Antenna | | 8 | - |
| Isolation (Tx – Rx) | Tx | | 53 | - |
| | Rx | | 45 | - |

Passband Characteristics of Duplexer BWD190A

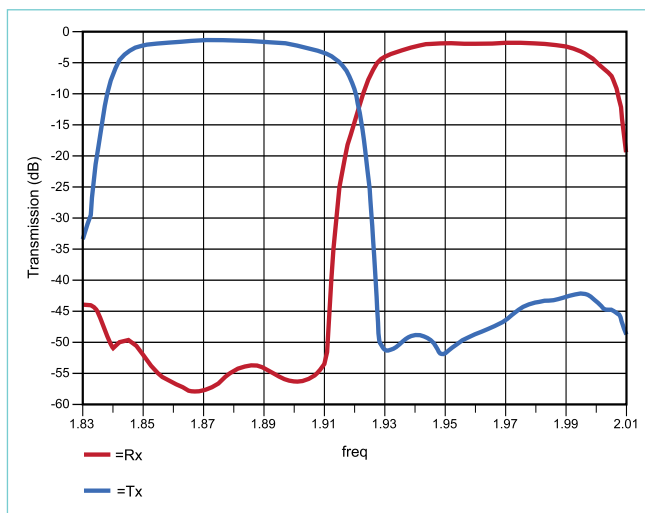

6. Satellite outdoor unit (LNB)

One-stop shop for low-noise block down converter designs

Helping simplify your supply chain, Philips Semiconductors meets all your hardware needs for low-noise block down converter (LNB) designs. Our high-quality components are finely tuned to work together seamlessly for the best performance. In addition, a wide choice of types ensures maximum design freedom.



Key benefits:

- Complete one-stop shop for LNB designs
- Fully optimized, high-performance components
- Full system and application support available
- Reliable, high-volume supply
- Easy-to-use, industry-standard packages
- Simple, flexible supply chain

Featured products

- CFH70x GaAs pHEMT LNAs
- BFG424F bipolar wideband transistor oscillator
- BGA27xx MMIC IF amplifiers
- BGM1420 4x2 switch
- BGM101x MMIC output IF amplifiers

The low-noise block down converter (LNB) or outdoor unit (ODU) plays a vital role in delivering satellite TV signals to consumers. And Philips offers the complete range of components required to build high-performance LNB systems.

Our portfolio covers everything from gallium-arsenide (GaAs) pHEMTs for the low-noise amplifier (LNA) stages to silicon monolithic microwave ICs (MMICs) for the output IF amplifiers – and everything in between. All fully optimized to work together to deliver the best performance.

All our LNB components are supplied in easy-to-use industry-standard packages, making system assembly simpler, cheaper and quicker. And full design support is available to help cut time-to-market even further. Our one-stop shop range greatly simplifies your supply chain and logistics, and gives you the reassurance of reliable high-volume supply.

CFH70x GaAs LNAs (in development)

The CFH70x pHEMT family is fabricated using GaAs process technology to deliver extremely low noise and very high gain. It is supplied in the easy-to-use SOT343FP plastic 4-pin SMD package. CFH70x pHEMTs are ideal solutions for the mixer and both LNA stages in satellite LNB converters.

Key features

- Low noise
- High gain
- Compact flat-lead SOT343FP package simplifies assembly

pHEMT GaAs transistors

| Type | @ | | @ 12GHz | | Limits | | |
|---------|------------------------|----------------|------------|---------------|------------------------|------------------------|--------------------------------|
| | V _{ds} (V) | I _d | NF (dB) | Gain* (dB) | V _{ds} (V) | I _d (mA) | |
| CFH705F | 2 | 10 | 0.55 | 11.5 | 4 | 70 | 2nd stage LNAs, also for mixer |
| CFH703F | 2 | 10 | 0.35 | 13.5 | 4 | 70 | 1st stage LNAs |

Notes: * Ga = associated gain

BFG424F bipolar oscillator

The BFG424F is an NPN double polysilicon wideband transistor with a buried layer for low-voltage applications. Housed in an easy-to-use SOT343F package, it features very high gain, low noise, low feedback capacitance and a high transition frequency (25 GHz).

Key features

- Stable phase noise over temperature performance
- Compact flat-lead SOT343F package simplifies assembly
- Free oscillations at all LO frequencies

Product overview

| BFG424F | | | | | | | | | | | | | | |
|-------------------------|-------------------------|------------------------|--------------------------|-------------------------|-------------------------|-------------------------|--------------------------|---------------|---------------------------------|------|------|---------------------------------|------|------|
| V _{CBO} (V) | V _{CEO} (V) | I _c (mA) | P _{tot} (mW) | h _{FE} (dB) | C _{re} (fF) | f _T (GHz) | G _{max} (dB) | Noise (dB) | Phase noise @ 13.85GHz (dBc) | | | Phase noise @ 14.35GHz (dBc) | | |
| | | | | | | | | | 25°C | 35°C | 65°C | 25°C | 35°C | 65°C |
| 10 | 4.5 | 30 | 135 | 120 | 95 | 25 | 20 | 1.2 | -94.68 | | | -95.68 | | |

BGA27xx and BGM101x silicon MMIC IF amplifiers

MMICs integrate several components onto a single chip to cut component count and simplify design. They deliver high gain and low noise, and automatically compensate for temperature and process variations. Our BGA27xx and BGM101x families include a range of innovative products such as low-current and low-voltage options. They are supplied in the compact, SOT363 package for easy system integration.

Features

- Wide range of options for maximum design flexibility
- Variety of gain slopes

Product overview

| BGA27xx & BGM10xx IF amplifiers in SOT363 6 pin SMD package | | | | | | | | | | | | | | |
|---|--------|---------|-----|------------|---------|------------|-----------|------------|------------|---------|--------|--------|---------|--------|
| Type | @ | | fu | @1GHz | | | | Gain(dB) @ | | | | Limits | | |
| | Vs (V) | Is (mA) | | @-3dB (mA) | NF (dB) | Psat (dbm) | Gain (dB) | P1dB (dbm) | OIP3 (dbm) | 100 MHz | 2.2 Hz | 2.6 Hz | 3.0 GHz | Vs (V) |
| BGA2709 | 5 | 23.5 | 2.8 | 4.0 | 12.5 | 22.7 | 8.3 | 24 | 22.6 | 22.7 | 22 | 21.1 | 6 | 35 |
| BGA2712 | 5 | 12.6 | 2.8 | 3.9 | 4.8 | 21.3 | 0 | 12 | 20.9 | 21.9 | 20.8 | 18.6 | 6 | 25 |
| BGA2715 | 5 | 4.3 | 3.3 | 2.6 | -4 | 21.7 | -8 | 2.3 | 13.3 | 23.3 | 22.1 | 20.1 | 6 | 8 |
| BGA2716 | 5 | 15.9 | 3.2 | 5.3 | 11.6 | 22.9 | 8.9 | 22.2 | 22.1 | 22.8 | 22.1 | 20.8 | 6 | 30 |
| BGM1013 | 5 | 27.5 | 2.1 | 4.6 | 14 | 35.5 | 13 | 22.7 | 35.2 | 31.8 | 29.7 | 26.1 | 6 | 35 |
| BGM1011 | 5 | 25.5 | 2.9 | 4.7 | 13.8 | 30 | 12.2 | 23 | 25 | 37 | 32 | 28 | 6 | 35 |
| BGM1012 | 3 | 14.6 | 3.6 | 4.8 | 9.7 | 20.1 | 6 | 17.8 | 19.5 | 20.4 | 19.9 | 18.7 | 4 | 30 |
| BGM1014 | 5 | 21 | 2.7 | 4.6 | 13.5 | 32.2 | 12.2 | 22 | 31.5 | 34 | 32 | 28 | 6 | 30 |

BGA2715 / BGA 2716: Low current types BGM1013 / BGM1011 / BGM1012 / BGM1014: Optimised & high slope types

BGM1420 4x2 switch (in development)


The BGM1420 is a low-cost MMIC 4x2 amplifying IF switch matrix with an internal matching circuit. Supplied in a 24-pin HVQFN package, it greatly simplifies board design while integrated pre-amplifiers provide further cost and space savings. It delivers outstanding performance (21 mA supply current, flat 13 dB gain, minimum channel isolation of 33 dB), providing the flexibility to optimize gain performance with external amplifier in output stage.

Key features

- One part replaces four input stage IF amplifiers and switch
- Simplifies designs
- High performance

Product overview

| BGM1420 in HVQFN24 24 pin package | | | | | | | | | | | | |
|-----------------------------------|--------|---------|-----|-------------|---------|------------|-----------|------------|------------|-------|---------|--------|
| Type | @ | | fu | @1GHz | | | | | ISL (dB) | | Limits | |
| | Vs (V) | Is (mA) | | @-3dB (GHz) | NF (dB) | Psat (dbm) | Gain (dB) | P1dB (dbm) | OIP3 (dbm) | 1 GHz | 2.2 GHz | Vs (V) |
| BGM1420 | 5 | 21 | 2.7 | 2.5 | -6 | 14 | -8 | 4 | 40 | 30 | 6 | 50 |

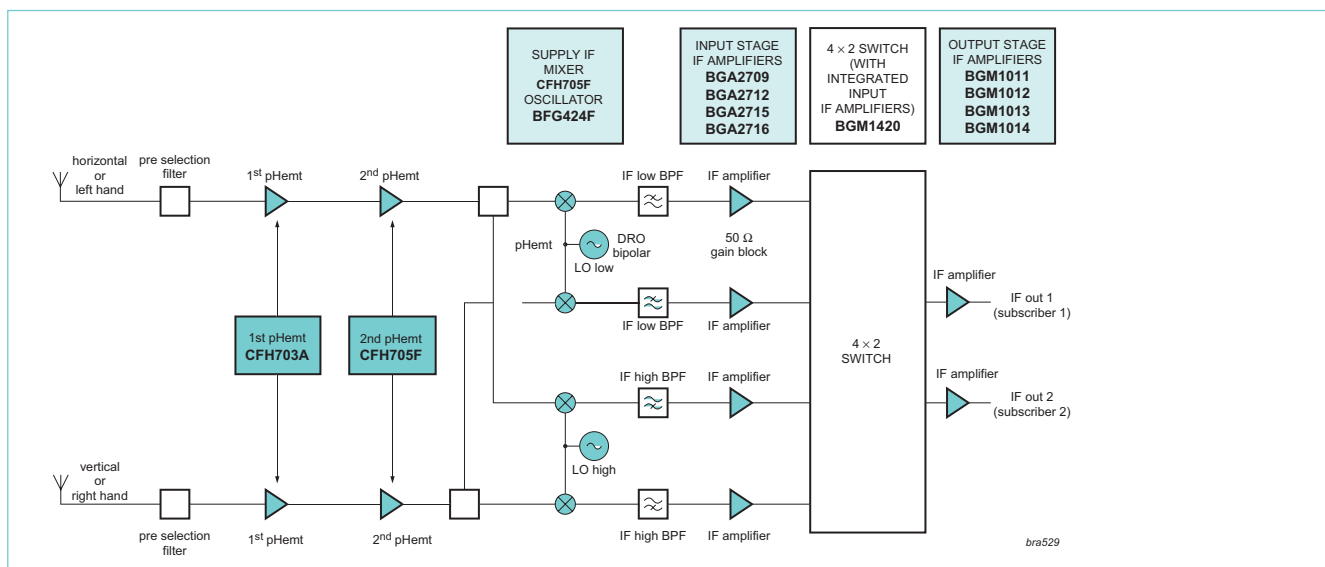


LNB complete solution block diagram

7. TZA30x6

TIAs for TO-can based ROSA applications up to 1250 Mbps

Designed for STM1/OC3, STM4/OC12, and FC/GE applications, these high-quality transimpedance preamplifiers have automatic gain control and provide low noise, a wide dynamic range, and low power dissipation.

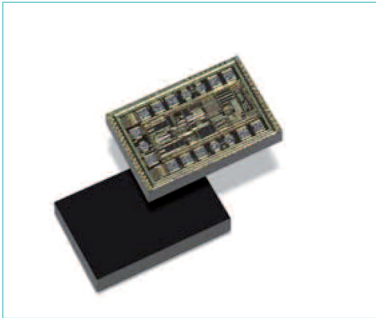

Key features

- High receiver sensitivity, low equivalent input noise
- Exceptionally wide bandwidths
- On-chip AGC with options for external control
- Input overload up to 1.5 mA pp
- Differential outputs
- Bias voltage for PIN diode
- Single 3.3-V supply voltage (range: 2.9 to 3.6 V)

Customer benefits

- Current output of average photo current for RSSI monitoring (SFF8472-compliant)
- Easy layout bonding
- Identical ports available on both sides of die
- RF polarity selection

Applications

- Digital fiber optic receiver modules (SFF/SFP transceivers)
- Telecommunications transmission systems
- High-speed data networks
- FTTx systems

The TZA30x6 family of transimpedance preamplifiers (TIAs) brings high receiver sensitivity, wide dynamic range, and low power dissipation to receiver optical sub assemblies (ROSA) applications that operate at up to 1250 Mbps. Each member of the family is optimized for a particular bit rate and transmission system.

| Product No. | Bit Rate | Transmission System |
|-------------|-----------|---------------------|
| TZA3036 | 155 Mbps | STM1/OC3 |
| TZA3026 | 622 Mbps | STM4/OC12 |
| TZA3046 | 1250 Mbps | FC/GE |

The absence of offset control loops lets these devices operate from DC onwards and protects the output waveform from consecutive identical digits (CIDs).

High Receiver Sensitivity

By minimizing noise, TZA30x6 devices deliver exceptionally high receiver sensitivity. Typical noise levels, calculated with a lowpass bandwidth filter at a 0.7x bit rate and a source with an extinction ratio of 10% and a photodiode responsivity of 0.9A/W, are -40 (TZA3036), -32 (TZA3026), and -29 (TZA3046).

Wide Dynamic Range

To prevent excessive distortion at the output stage, each TZA30x6 device has an integrated automatic gain control (AGC) loop that reduces the preamplifier's feedback resistance. The AGC loop can be controlled externally and includes a hold capacitor, reducing external chip-count.


TO-can Assemblies

Small size, identical ports on both sides, and RF polarity selection make TZA30x6 devices easy to use with cost-effective TO-can assemblies. Short bonding wires to ground improve overall performance.


TZA30x6 Transimpedance Preamplifiers

| Product | Application | Bit Rate (Mbps) | Sensitivity (S) ¹ | In (nARMS) | Overload (mApp) | Gain (kOhmdiff) | Flow (Hz) | Fhigh (-3dB) |
|---------|-------------|-----------------|------------------------------|------------|-----------------|-----------------|-----------|--------------|
| TZA3036 | STM1/OC3 | 155 | -40 | 10 | 1.5 | 69.0 | DC | 160 MHz |
| TZA3026 | STM4/OC12 | 622 | -32 | 67 | 1.5 | 14.0 | DC | 650 MHz |
| TZA3046 | FC/GE | 1250 | -29 | 130 | 1.5 | 9.0 | DC | 1050 MHz |

¹ Calculated from noise figure using a lowpass bandwidth filter at 0.7x bit rate and a source with an extinction ratio of 10% and a photodiode responsivity of 0.9A/W.

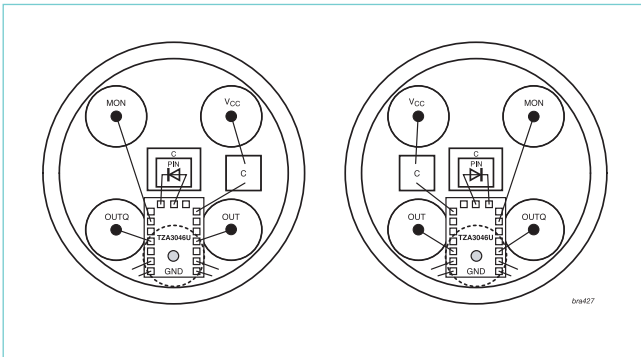

Possible TZA30x6 application highlighting flexible pad layout

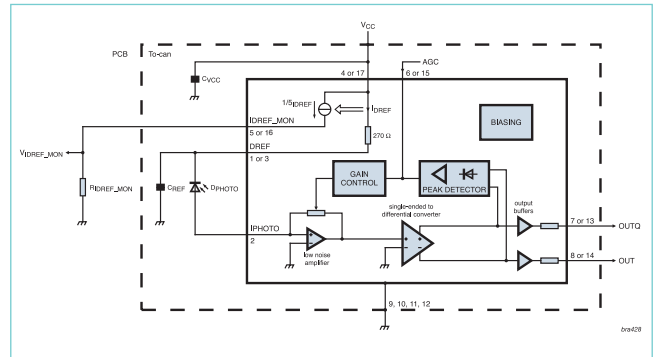

TZA30x6 application diagram

8. Contacts and Web Links

How to contact your authorized distributor or local Philips representative:

Authorized distributors:

Asia Pacific:

http://www.semiconductors.philips.com/profile/sales/asia_pacific_dist/

Europe / Africa / Middle East:

http://www.semiconductors.philips.com/profile/sales/europe_dist/

North America:

http://www.semiconductors.philips.com/profile/sales/northamerica_dist/

South America:

http://www.semiconductors.philips.com/profile/sales/southamerica_dist/

Local Philips Offices:

Asia Pacific:

http://www.semiconductors.philips.com/profile/sales/asia_pacific/

Europe / Africa / Middle East:

<http://www.semiconductors.philips.com/profile/sales/europe/>

North America:

<http://www.semiconductors.philips.com/profile/sales/northamerica/>

South America:

<http://www.semiconductors.philips.com/profile/sales/southamerica/>

Web Links

Philips Semiconductors:

<http://www.semiconductors.philips.com>

Philips RF Manual web page:

http://www.semiconductors.philips.com/markets/mms/products/discretes/documentation/rf_manual/

Philips product selector:

<http://www.semiconductors.philips.com/products/selector/27046/index.html>

Philips RF discretes catalogue:

<http://www.semiconductors.philips.com/cgi-bin/catalog/catalog.pl/mms/219/282/^27046/>

Philips varicaps:

http://www.semiconductors.philips.com/markets/mms/products/discretes/featured_products/rf_varicaps/

Philips RF PIN diodes:

http://www.semiconductors.philips.com/markets/mms/products/discretes/key_solutions/multimarket/diodes/pin_diodes/index.html

Philips RF Schottky diodes:

http://www.semiconductors.philips.com/markets/mms/products/discretes/key_solutions/multimarket/diodes/low_cd_schottky/index.html

Philips RF MMICs:

<http://www.semiconductors.philips.com/markets/mms/products/discretes/mmic/index.html>

Philips RF wideband transistors:

http://www.semiconductors.philips.com/markets/mms/products/discretes/key_solutions/multimarket/transistors/25_45ghz_wideband/index.html

Philips RF CATV electrical & optical

<http://www.semiconductors.philips.com/markets/communications/applications/infrastructure/catv/index.html>

Philips optical networking

<http://www.semiconductors.philips.com/markets/computing/applications/optical/index.html>

Philips RF applications:

<http://www.semiconductors.philips.com/markets/mms/applications/index.html>

Philips application notes:

http://www.semiconductors.philips.com/markets/mms/documentation/app_notes/

Philips application notes - MMICs:

http://www.semiconductors.philips.com/markets/mms/products/discretes/documentation/mmic_amplifiers_mixers/

Philips application notes - transistors:

<http://www.semiconductors.philips.com/markets/mms/products/discretes/documentation/transistors/>

Philips cross-references:

<http://www.semiconductors.philips.com/products/xref/>

Philips green packaging:

http://www.semiconductors.philips.com/green_roadmap/

Philips end-of-life:

<http://www.semiconductors.philips.com/products/eol/>

Philips Quality Handbook:

<http://www.standardics.philips.com/quality/handbook/>

Philips literature:

<http://www.semiconductors.philips.com/documentation/commercial/mms/discretes.html>

Philips packaging:

<http://www.semiconductors.philips.com/package/index.html>

Philips green packaging:

http://www.semiconductors.philips.com/green_roadmap/

Philips sales offices and distributors:

<http://www.semiconductors.philips.com/profile/sales/index.html>

Philips Semiconductors

Philips Semiconductors is one of the world's top semiconductor suppliers, with 20 manufacturing and assembly sites and a sales organization that delivers in 60 countries. For a complete up-to-date list of our sales offices please visit our website <http://www.semiconductors.philips.com/sales>

©2005 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

date of release: November 2005

document order number: 9397 750 15371

