


No.964

STK8280



Thick Film Hybrid Integrated Circuit
80W MIN AF POWER AMP. OUTPUT STAGE (DUAL SUPPLIES)
WITH BUILT-IN QUASI CLASS A BIAS CIRCUIT

Features

1. Switching distortion peculiar to class B amp. is zero.
2. Since power stage, bias controller, and temperature compensator are incorporated on the IMST substrate having good thermal conduction, no complicated temperature compensation using thermistor, etc. is required, thereby enabling good thermal stability.
3. By setting bias current externally, optimum conditions can be set.

Maximum Ratings at Ta=25°C

			unit
Maximum Supply Voltage	V _{CC} max	±65	V
Thermal Resistance	θ _{j-c}	1.4	°C/W
Collector Current	I _C	7	A
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-30 to +105	°C
Available Time for Load Shorted	t _s	V _{CC} =±47V*, f=50Hz, Po=80W, R _L =8ohm	2 sec

Recommended Operating Conditions at Ta=25°C


			unit
Recommended Supply Voltage		±47	V
Load Resistance		8	ohm

Operating Characteristics at Ta=25°C, V_{CC}=±47V, R_L=8ohm, R_g=600ohm, VG=26.5dB, at specified test circuit (based on Sample Application Circuit)

			min	typ	max	unit
Quiescent Current	I _{cco}	V _{CC} =±55V**			80	mA
Output Power	P _o	THD=0.01%, f=20Hz to 20kHz	80			W
Total Harmonic Distortion	THD	P _o =1.0 to 80W, f=20Hz to 20kHz			0.01	%


*:For measuring available time for load shorted, use the specified transformer power supply shown right.

** :Maximize VR1(30kΩ) of Application Circuit.

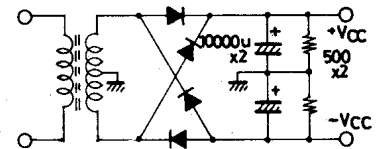


Specified Transformer Power Supply (Equivalent to Tango MG-200)

Equivalent circuit

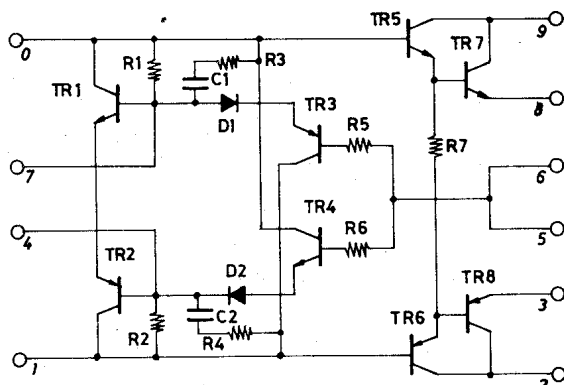

Case Outline 4006 (unit:mm)

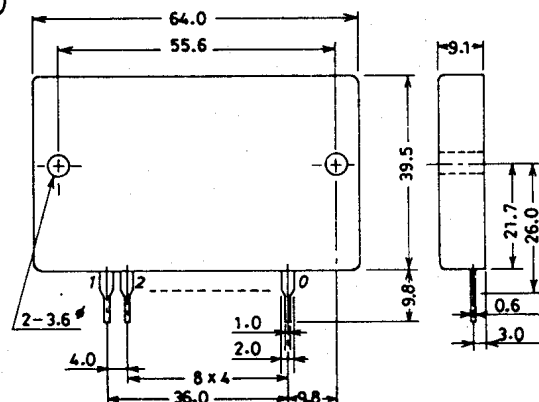

These specifications are subject to change without notice.

