



Data Sheet

Typical Performance

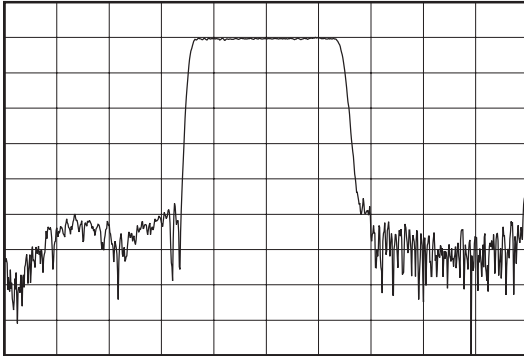

Horizontal: 10 MHz/Div  
Vertical: 10 dB/Div

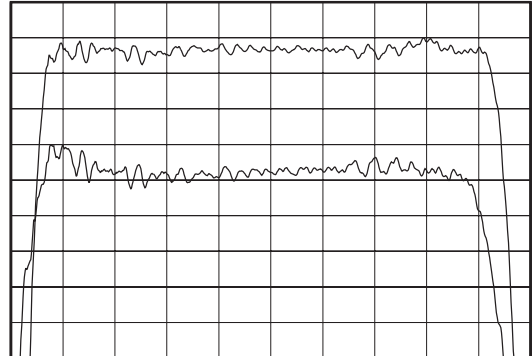


Horizontal: 3.2 MHz/Div  
Vertical: 1 dB/Div  
Vertical: 5 deg/Div


Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.8	70	70.2
Insertion Loss at $F_o$	dB	-	17.6	18
1 dB Bandwidth	MHz	27.2	27.5	-
3 dB Bandwidth	MHz	28	28.5	-
40 dB Bandwidth	MHz	-	33.75	34.65
Passband Ripple	dB	-	0.85	1
Phase Linearity (%90 of 3dB Bandwidth)	deg	-	8.3	11.5
Group Delay Variation (%90 of 3dB Bandwidth)	nsec	-	75	120
Absolute Delay	$\mu$ sec	-	1.17	-
Substrate Material	-	-	YZ LiNbO <sub>3</sub>	-
Temperature Coefficient	ppm/ $^{\circ}$ C	-	-94	-
Ambient Temperature	$^{\circ}$ C	-	25	-

Package Outline

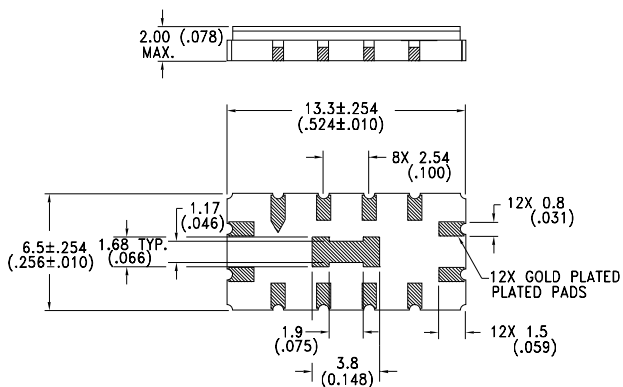

Matching Configuration

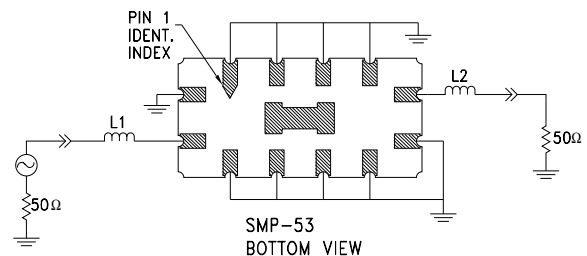

$L1 = 120\text{nH}$ ,  $L2 = 100\text{nH}$   
Nominal Source/Load Impedance =  $50\Omega$   
Package Style SMP-53

11/29/99