

January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:<http://www.semtech.com>AXIAL LEADED HERMETICALLY SEALED HIGH
VOLTAGE FAST RECTIFIER DIODEQUICK REFERENCE
DATA


- Low reverse recovery time
- Very low leakage current
- Glass passivated for hermetic sealing
- Avalanche capability
- Soft, non-snap off, recovery characteristics

- $V_R = 5 - 7.5\text{kV}$
- $I_F = 92\text{mA}$
- $t_{rr} = 250\text{nS}$
- $I_R = 0.03\mu\text{A}$

ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	PFM50	PFM75	Unit
Working reverse voltage	V_{RWM}	5000	7500	V
Repetitive reverse voltage	V_{RRM}	5650	8500	V
Surge reverse voltage	V_{RSM}	5650	8500	V
Average forward current (@ 55°C in oil)	$I_{F(AV)}$	92	92	mA
Repetitive surge current (@ 55°C in oil, lead length 0.375")	I_{FRM}	1.0	1.0	A
Non-repetitive surge current ($t_p = 8.3\text{mS}$, @ V_R & T_{jmax})	I_{FSM}	2.0	2.0	A
Storage temperature range	T_{STG}	-65 to +150	-65 to +150	°C
Operating temperature range	T_{OP}	-65 to +150	-65 to +150	°C


MECHANICAL

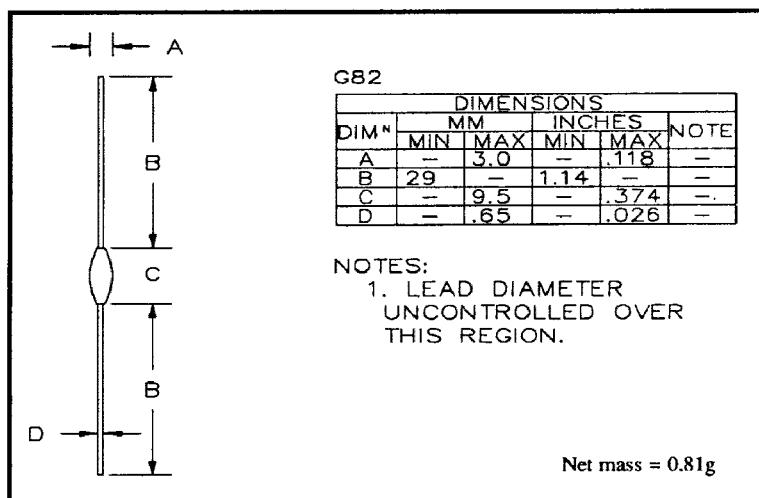

January 7, 1998

CHARACTERISTICS (@ 25°C unless otherwise specified)

	Symbol	PFM50	PFM75	Unit
Average forward current max. (pcb mounted; TA = 55°C) for sine wave for square wave (d = 0.5)	I _{F(AV)} I _{F(AV)}	← 47 → ← 50 →		mA mA
Average forward current max. (unstirred oil at 55°C) for sine wave for square wave	I _{F(AV)} I _{F(AV)}	← 84 → ← 92 →		mA mA
I ² t for fusing (t = 8.3mS) max.	I ² t	← 0.017 →		A ² S
Forward voltage drop max. @ I _F = 25mA, T _j = 25°C	V _F	← 12.5 →		V
Reverse current max. @ VRWM, T _j = 25°C @ VRWM, T _j = 100°C	I _R I _R	← 0.03 → ← 3.00 →		μA μA
Reverse recovery time max. 50mA I _F , 100mA I _R , 25mA I _{RR}	t _{rr}	← 250 →		nS
Junction capacitance typ. @ VR = 5V, f = 1MHz	C _j	← 0.75 →		pf
Thermal resistance - junction to oil Stirred oil Unstirred oil	R _{θJO} R _{θJO}	← 48 → ← 64 →		°C/W °C/W
Thermal resistance - junction to amb. on 0.06" thick pcb. 1oz copper.	R _{θJA}	← 160 →		°C/W

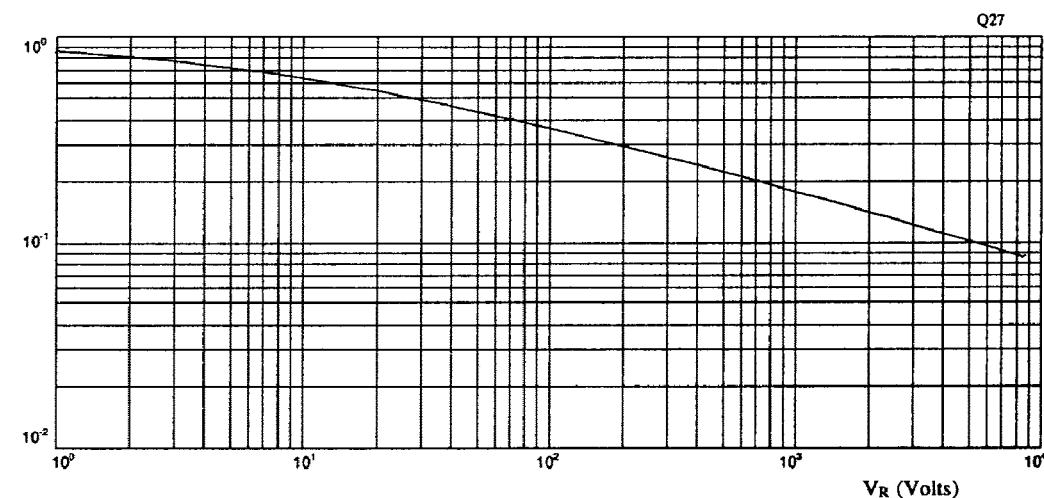Fig 1 Junction capacitance
against reverse voltage.

January 7, 1998

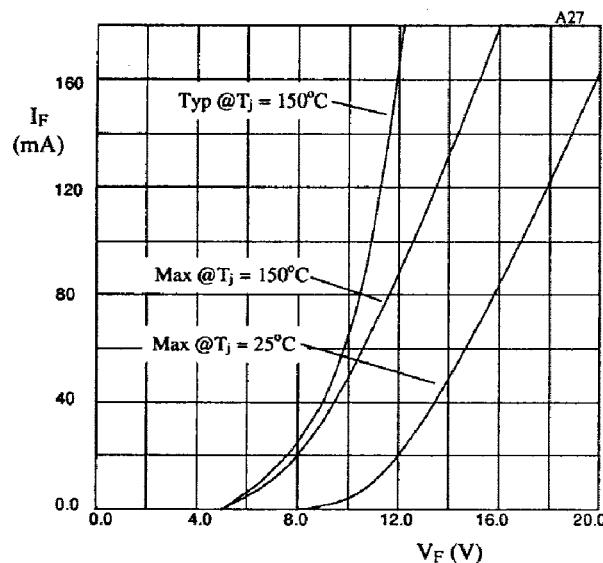


Fig 2. Forward voltage drop as a function of forward current.

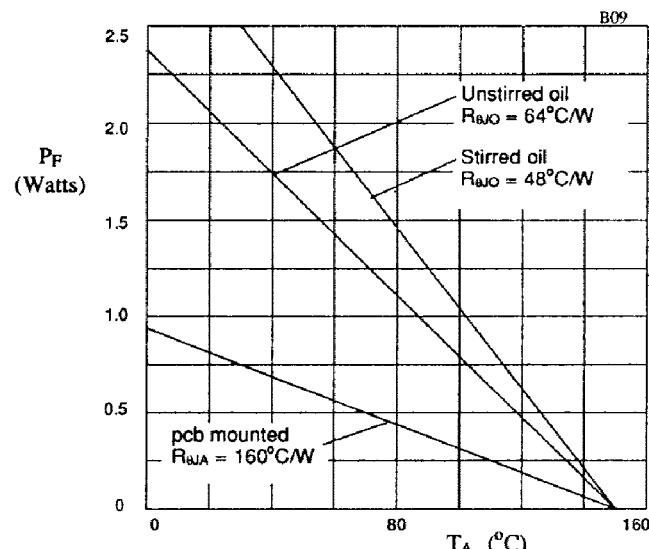


Fig 3. Power derating in air and oil.

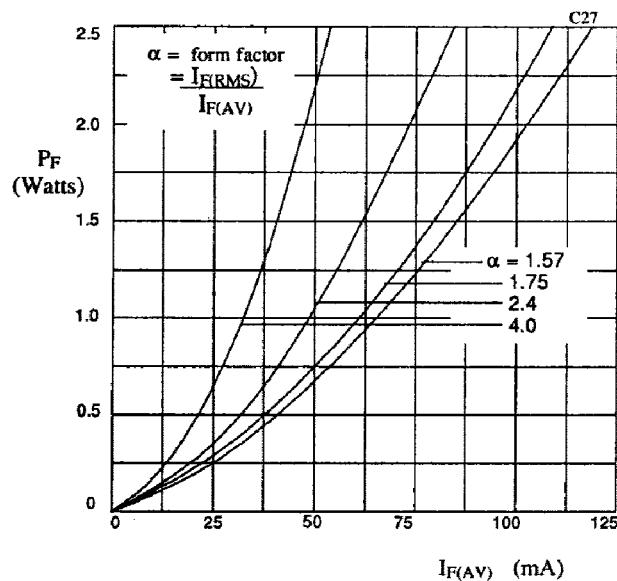


Fig 4. Forward power dissipation as a function of forward current, for sinusoidal operation.

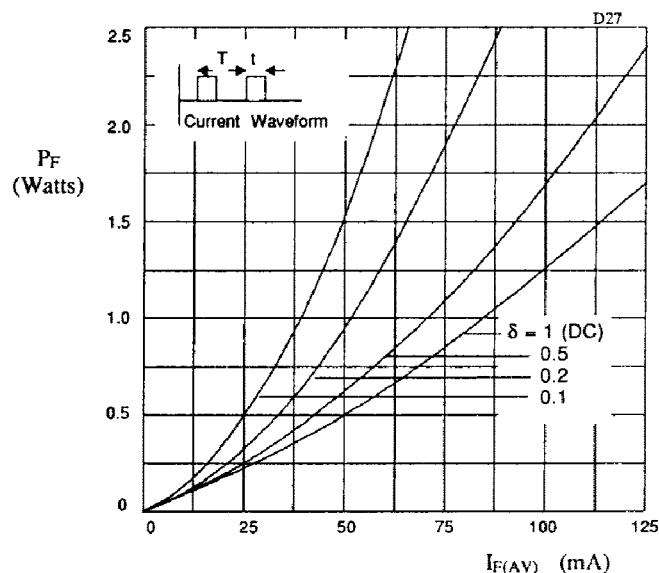


Fig 5. Forward power dissipation as a function of forward current, for square wave operation.