

**1SS345**

Silicon Epitaxial Schottky Barrier Diode


UHF Detector, Mixer Applications**Features**

- Small interterminal capacitance ($C=0.45\text{pF}$ typ).
- Low forward voltage and excellent detection efficiency ($V_F=0.35\text{V}$ max)
- High breakdown voltage ($V_R=55\text{V}$).
- Very small-sized package permitting the 1SS345-applied sets to be made small and slim.

Package Dimensions

unit:mm

1148A

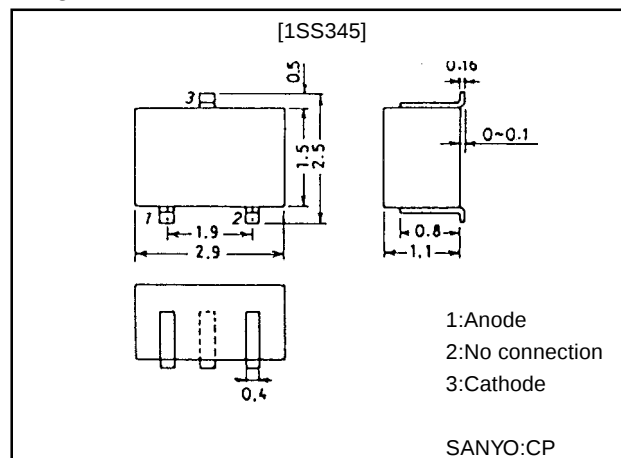
**Specifications****Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$**

Parameter	Symbol	Conditions	Ratings	Unit
Reverse Voltage	V_R		55	V
Forward Current	I_F		10	mA
Power Dissipation	P		150	mW
Junction Temperature	T_j		125	$^\circ\text{C}$
Storage Temperature	T_{stg}		-55 to +125	$^\circ\text{C}$
Reverse Burning	B_o	($C=25\text{pF}$)	2	erg

Electrical Characteristics at $T_a = 25^\circ\text{C}$




Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Forward Voltage	V_F	$I_F=1\text{mA}$			0.35	V
Forward Current	I_F	$V_F=1\text{V}$	10			mA
Reverse Voltage	V_R	$I_R=100\mu\text{A}$	55			V
Reverse Current	I_R	$V_R=40\text{V}$			50	μA
Interterminal Capacitance	C	$V_R=10\text{V}$, $f=1\text{MHz}$		0.45		pF

· Marking:AH

Electrical Connection**SANYO Electric Co.,Ltd. Semiconductor Business Headquarters**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

33098HA (KT)/53196GI (KOTO)/O259MO, TS 8-5744 No.3157-1/2

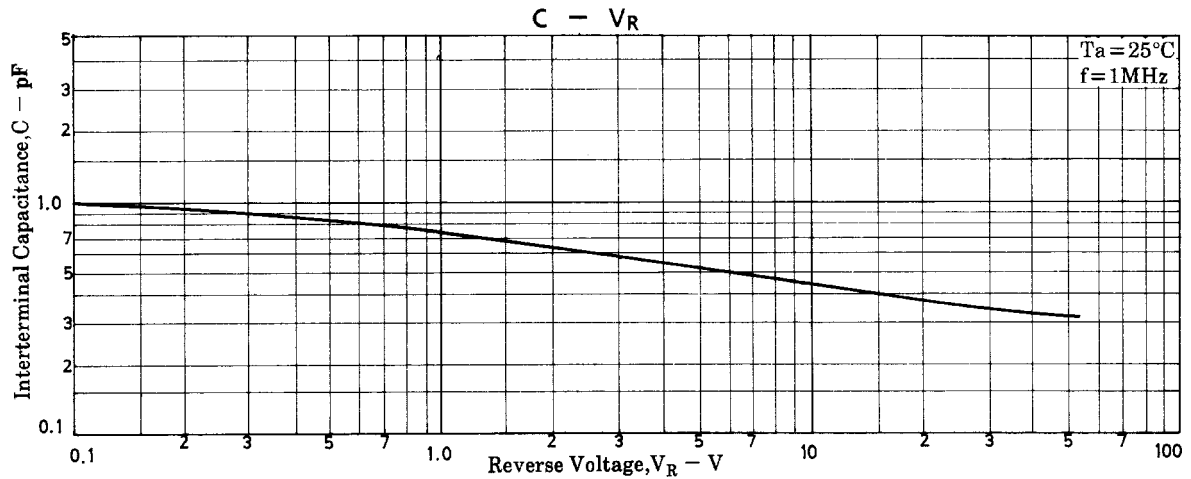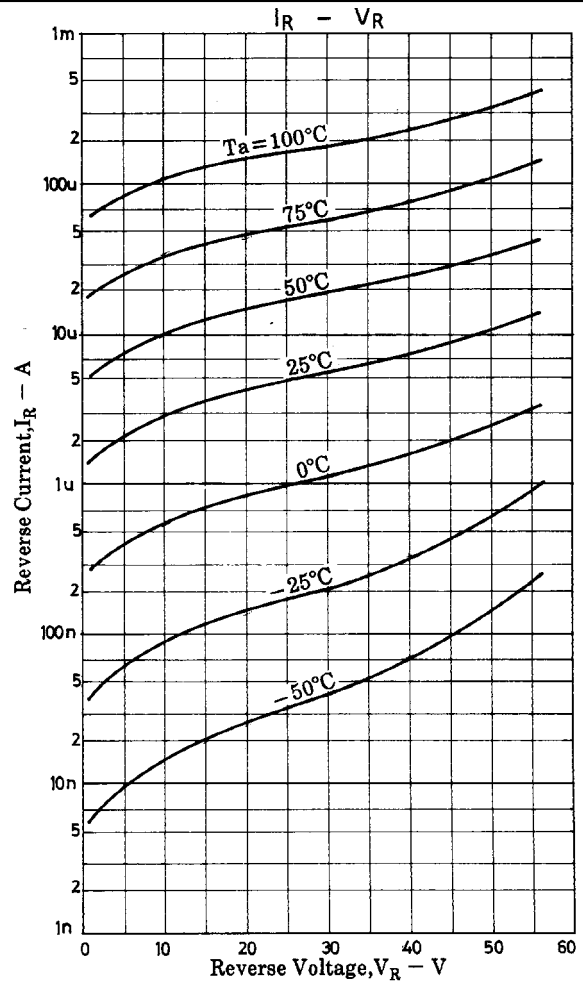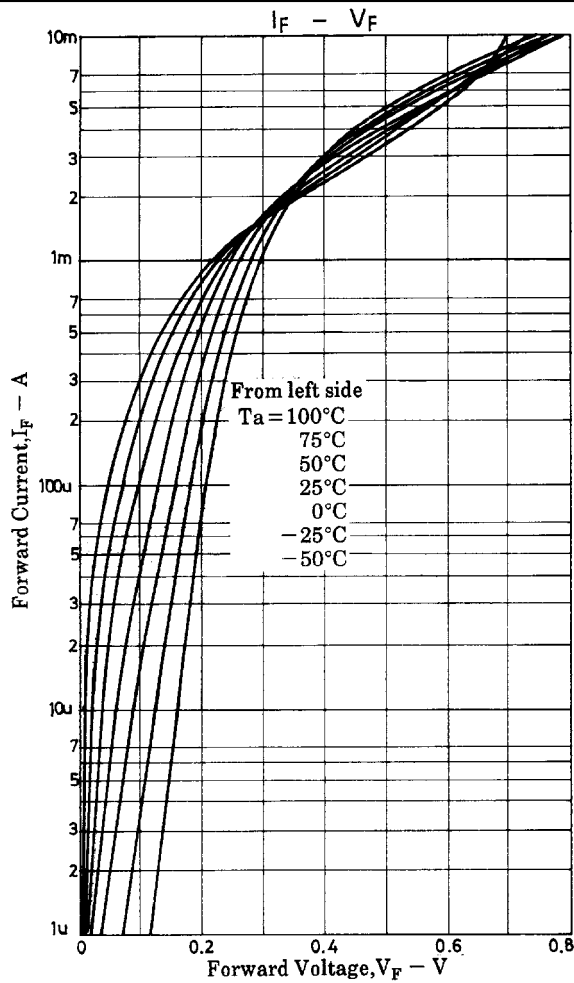

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 1998. Specifications and information herein are subject to change without notice.