



## Control Transformer UL1585, Class 2

### TCT40-02E07K

#### Description:

Triad control transformers come with tamper resistant shrouds for safety and a steel bracket welded to the bottom of the transformer for ease of mounting. This style comes with 18 AWG stranded leads which are 12 inches in length.

#### Electrical Specifications (@25C):

Maximum Power: 40VA  
Input: 240V, 50/60 Hz  
Output: 24V @ 1.67 Amps

#### Construction:

These transformers are designed with dual bobbin construction and insulated shrouds on the primary and secondary sides. Welded laminations have holes in each corner to allow direct mounting to a panel.

#### Safety:

Since these products are inherently energy limited, no secondary fusing is required. Triad Control Transformers are designed and manufactured to meet the following agency approvals:



#### Agency Files:

UL: File E65390, UL 1585, Class 2, Component  
File E65390, Certified for Canada  
CSA: File 226495

#### Dimensions: (all dimensions in inches)





Corner holes in laminations: 0.16  
Spacing between corner holes: 2.19 (horizontal)  
Spacing between corner holes: 1.75 (vertical)  
All other dimensions: see drawing

Unit Pack Boxed Weight: 1.5 lbs

#### Lead Configuration/ Color:

120V Primary: Black / Red Secondary: Yellow / Yellow

\*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

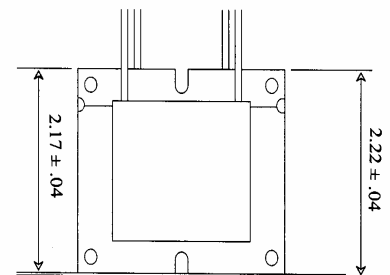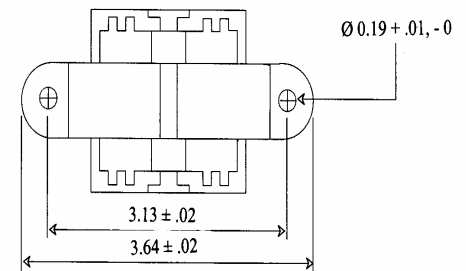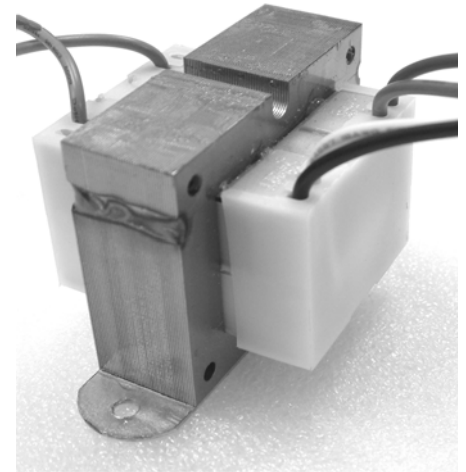

web: [www.TriadMagnetics.com](http://www.TriadMagnetics.com)  
Phone 951-277-0757  
Fax 951-277-2757

22520B Temescal Canyon Road  
Corona, California  
92883

Release Date: August 27, 2004  
Revision: A