# **AN6877, AN6878**


### 7-Dot LED Driver Circuits

### Description


The AN6877 and AN6878 are monolithic integrated circuits driving 7-LEDs. The AN6877 respond linearly and the AN6878 does logarithmically for input signal. As output current adjusting pin is set, it can control LED brightness.

#### ■ Features

- 7-LED bar graph display drive
- Linear (AN6877) and Logarithm (AN6878) response
- Brightness externally adjustable
- High output current: 25mA max.
- Series connection available for driving more than 7-dot display
- Incorporating reference supply voltage circuit
- No fluctuation of LED current even if supply voltage changes
- Snap turning on available

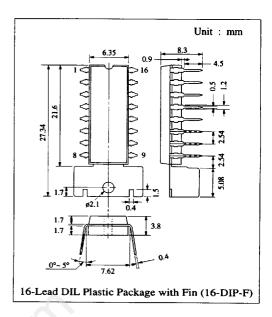

### ■ Block Diagram

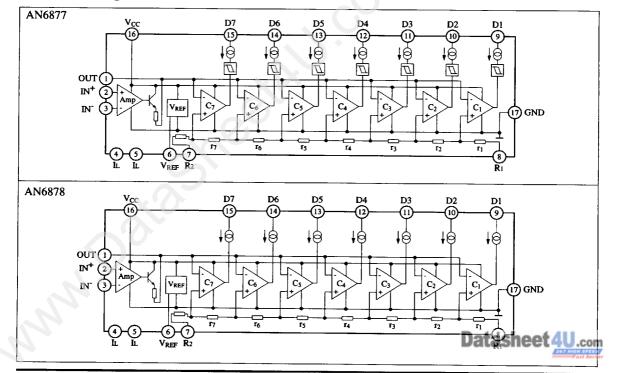

# ■ Absolute Maximum Ratings (Ta=25°C)

Item		Symbol	Rating	Unit
	Supply Voltage	v <sub>cc</sub>	18	V
Voltage	Circuit Voltage	$v_1$	7.5	V
	Input Voltage	V <sub>12,3</sub>	16	V
	Output Voltage	V <sub>O 9-15</sub>	16	V
Current	Supply Current	I <sub>CC</sub>	25	mA
	Output Current	Io	25	mA
Power Dissipation (Ta = 25°C)		P <sub>D</sub>	1,800*	mW
Operating Ambient Temperature		Topr	-30 ~ +75	°C
Storage Temperature		Tstg	-55 ~ +150	°C

<sup>\*</sup> Value of no radiating fin. Refer  $P_D$  - Ta characteristics curve for radiating fin design. Operating Supply Voltage Range:  $V_{CC} = 5.0V \sim 16.0V$ 

## ■ Electrical Characteristics (V<sub>CC</sub>=9V, Ta=25°C)


Item	Symbol	Test Circuit	Condition	min.	typ.	max.	Unit
Supply Current	I <sub>CC</sub>	1	V <sub>2</sub> =V <sub>3</sub> =0V	4		18	mA
Output Inflow Current	lo 9-15	2	V <sub>1</sub> =3.55V, V <sub>7</sub> =3.5V	13		25	mA
Reference Voltage	V <sub>REF</sub>	3		3.55	3.75	3.95	V
Output Offset Voltage (Amp.)	$V_1$	4	V <sub>CC</sub> =16V, G <sub>V</sub> =20dB, V <sub>2</sub> =0V	-150		150	mV
Voltage Gain (Amp.)	$V_G$	4	V <sub>2</sub> =50mV	18	20	22	dB
Output Pin Leak Current	I9-15	5	V <sub>CC</sub> =18V	0		20	μΑ
I Dis Commt (Amn)	I <sub>Bias2</sub>	6	V <sub>CC</sub> =18V, V <sub>2</sub> =V <sub>3</sub> =0V	-2		0	μΑ
Input Bias Current (Amp.)	I <sub>Bias3</sub>	6	V <sub>CC</sub> =18V, V <sub>2</sub> =V <sub>3</sub> =0V	-2		0	μΑ
Input Bias Current	I <sub>Bias7</sub>	7	V <sub>CC</sub> =18V, V <sub>2</sub> =10V, V <sub>3</sub> =V <sub>7</sub> =V <sub>8=</sub> 0V	-10		0	μA
(Comparator)	IBias1	7	$V_{CC}=18V$ , $V_3=10V$ , $V_1=V_2=0V$ , $V_6=V_7=V_8$	-10		0	μА
	GD <sub>1</sub>			0.4	0.5	0.6	V
	$GD_2$			0.85	1	1.15	V
	GD <sub>3</sub>			1.35	1.5	1.65	V
Comparator Level (AN6877)	GD <sub>4</sub>	8	$V_7=3.65V, V_8=0V$	1.85	2	2.15	V
•	GD <sub>5</sub>			2.35	2.5	2.65	V
	GD <sub>6</sub>			2.85	3	3.15	v
	GD <sub>7</sub>			3.35	3.5	3.65	v
	GD <sub>1</sub> *			-17	-15	-13	dB
	GD <sub>2</sub>			-9	-7	-5	dB
	GD <sub>3</sub>			-4	-3	-2	dB
Comparator Level (AN6878)	GD <sub>4</sub>	8	V <sub>7</sub> =3.5V, V <sub>8</sub> =0V	-1	0	1	dB
•	GD <sub>5</sub>	1		1.5	2	2.5	dB
	GD <sub>6</sub>	1		3.5	4	4.5	dB
	GD <sub>7</sub>	1		4.5	5	5.5	dB

<sup>\*</sup> Comparator reference voltage = 3.5V, 2.0V = 0dB.


#### ■ Pin

Pin No.	Pin Name	Pin No.	Pin Name	
1	Amp. Output	9	LED 1 Output	
2	Non Inverting Input	10	LED 2 Output	
3	Inverting Input	11	LED 3 Output	
4	LED Current Setting Input	12	LED 4 Output	
5	LED Current Setting Input	13	LED 5 Output	
6	Reference Voltage	14	LED 6 Output	
7	LED ON Level Setting Input	15	LED 7 Output	
8	LED ON Level Setting Input	16	Vcc	


# Test Circuit 1 (I<sub>CC</sub>)




# Test Circuit 3 (V<sub>REF</sub>)




### Test Circuit 5 (I<sub>9-15</sub>)




# Test Circuit 2 (I<sub>O 9-15</sub>)

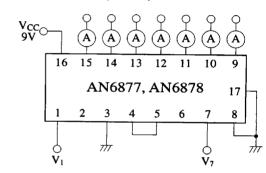


Test Circuit 4 (V<sub>1</sub>, V<sub>G</sub>)

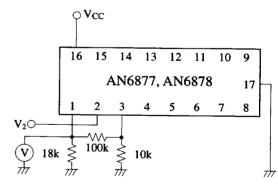


Test Circuit 6 (IBias2, IBias3)

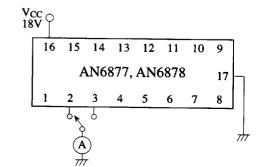


### Test Circuit 7 (IBias7, IBias1)

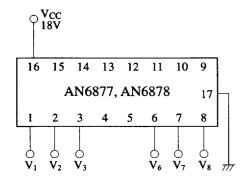

#### Test Circuit 8 (GD<sub>1-7</sub>)

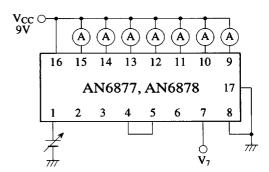

#### Application Circuit

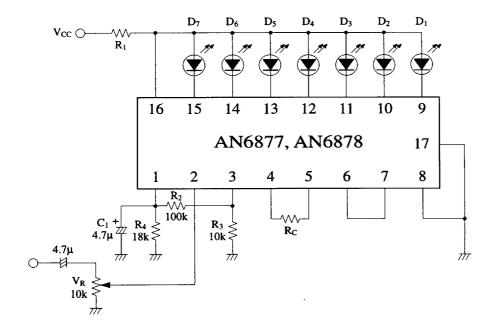

- For input amp. gain determination: R<sub>2</sub>, R<sub>3</sub>
- LED current adjusting resistor : R<sub>C</sub>

$$R_C = 300\Omega$$
  $I_{LED} = 18mA$ 

$$R_C = 3.3k\Omega$$
  $I_{LED} = 5mA$ 

- Determine by using [PD Ta] characteristics data about power supply R1
- For response time determination: C<sub>1</sub>, C<sub>4</sub>
- For input level determination : V<sub>R</sub>

#### ■ Characteristics Curve

