www.DataSheet4U.com

3SK228

GaAs Dual Gate MES FET


HITACHI

ADE-208-280 1st. Edition

Application

UHF TV tuner RF Amplifier

Outline

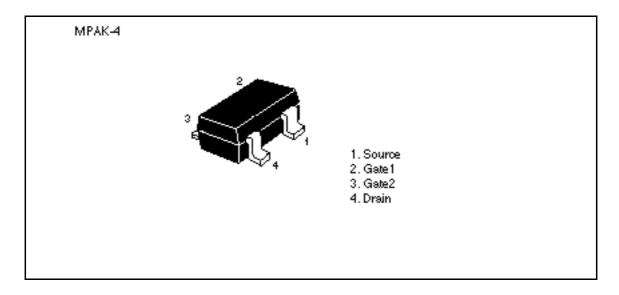



www.Dat_3SK228

Absolute Maximum Ratings ($Ta = 25^{\circ}C$)


Item	Symbol	Ratings	Unit
Drain to source voltage	V_{DS}	V _{DS} 12	
Gate 1 to source voltage	$V_{\sf G1S}$	-6	V
Gate 2 to source voltage	V_{G2S}	-6	V
Drain current	I _D	50	mA
Channel power dissipation	Pch	150	mW
Channel temperature	Tch	125	°C
Storage temperature	Tstg	-55 to +125	°C

Electrical Characteristics ($Ta = 25^{\circ}C$)


Item	Symbol	Min	Тур	Max	Unit	Test conditions
Drain to source cutoff current	I _{DSX}	_	_	50	μΑ	$V_{DS} = 12 \text{ V}, V_{G1S} = -3 \text{ V}, V_{G2S} = 0$
Gate 1 to source breakdown voltage	$V_{(BR)G1SS}$	-6	_	_	V	$I_{G1} = -10 \ \mu A, \ V_{G2S} = V_{DS} = 0$
Gate 2 to source breakdown voltage	$V_{(BR)G2SS}$	-6	_	_	V	$I_{G2} = -10 \ \mu A, \ V_{G1S} = V_{DS} = 0$
Gate 1 cutoff current	I _{G1SS}	_	_	– 5	μΑ	$V_{G1S} = -5 \text{ V}, V_{G2S} = V_{DS} = 0$
Gate 2 cutoff current	$I_{\rm G2SS}$	_	_	– 5	μΑ	$V_{G2S} = -5 \text{ V}, V_{G1S} = V_{DS} = 0$
Drain current	I _{DSS}	10	17	32	mA	$V_{DS} = 5 \text{ V}, V_{G1S} = V_{G2S} = 0$
Gate 1 to source cutoff voltage	$V_{\text{G1S(off)}}$	_	-1.1	-1.5	V	$V_{DS} = 5 \text{ V}, V_{G2S} = 0,$ $I_{D} = 100 \mu\text{A}$
Gate 2 to source cutoff voltage	$V_{\text{G2S(off)}}$	_	-1.1	-1.5	V	$V_{DS} = 5 \text{ V}, V_{G1S} = 0,$ $I_{D} = 100 \mu\text{A}$
Forward transfer admittance	y _{fs}	20	34	_	mS	$V_{DS} = 5 \text{ V}, V_{G2S} = 1 \text{ V},$ $I_{D} = 10 \text{ mA}, f = 1 \text{ kHz}$
Input capacitance	Ciss	_	0.58	1.0	pF	$V_{DS} = 5 \text{ V}, V_{G1S} = V_{G2S} = -3 \text{ V},$ f = 1 MHz
Output capacitance	Coss	_	0.36	0.6	pF	_
Reverse transfer capacitance	Crss		0.028	0.05	pF	
Power gain	PG	17	19.6	_	dB	$V_{DS} = 5 \text{ V}, V_{G2S} = 1 \text{ V},$ $I_D = 10 \text{ mA}, f = 900 \text{ MHz}$
Noise figure	NF	_	1.3	2.0	dB	_

Note: Marking is "XR-".


www.DataSheet4U.com 3SK228

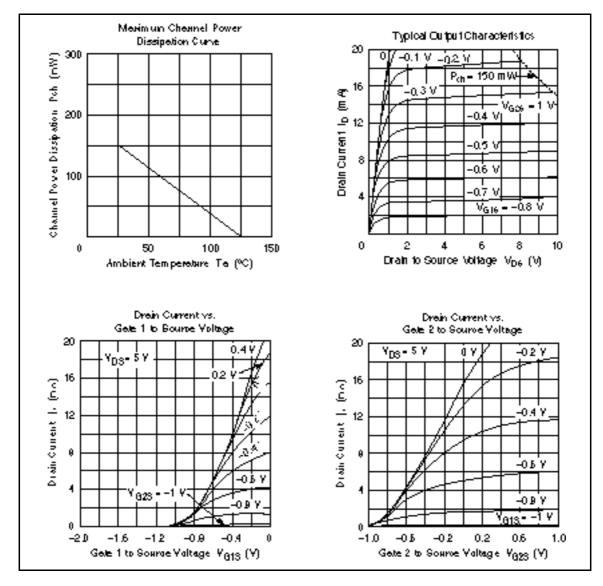

www.Dat_3SK228

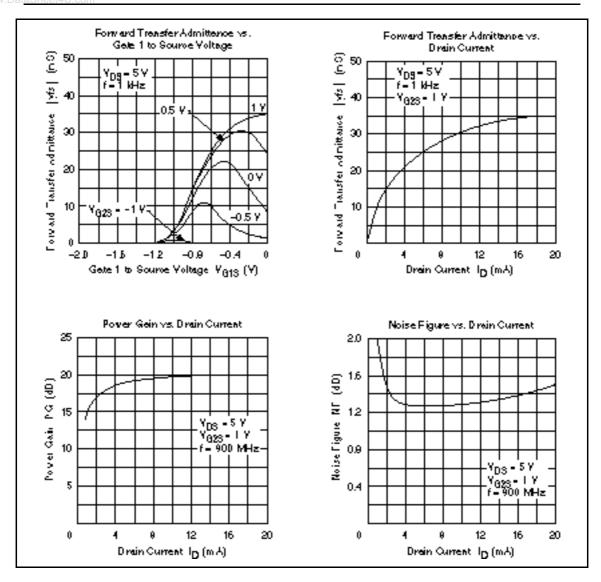


www.DataSheet4U.com 3SK228

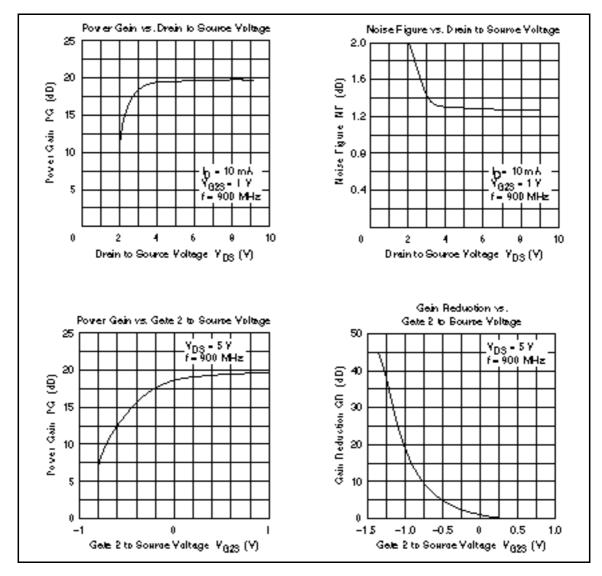

www.Dat_3SK228

Power Gain, Noise Figure Test Circuit

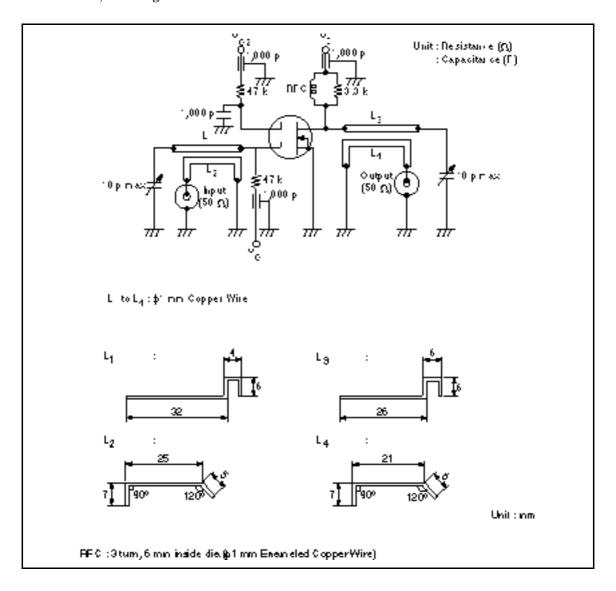

www.DataSheet411.com 3SK228

When using this document, keep the following in mind:

- 1. This document may, wholly or partially, be subject to change without notice.
- 2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
- 3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
- 4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
- 5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
- 6. MEDICAL APPLICATIONS: Hitachi's products are not authorized for use in MEDICAL APPLICATIONS without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in MEDICAL APPLICATIONS.

HITACHI

Hitachi, Ltd.
Semiconductor & IC Div.
Nippon Bidg., 2-6-2, Ohte-medii, Chiyode-ku, Tokyo 100, Jepen Tet Tokyo (03, 3270-2111
Fex: (03, 3270-5109)

For further in formation write to: Historia America, Utd. Semiconductor & IC DV. 2000 Sierra Point Portway Brisbane, CA. 94005-4835 U.S.A.

Tet +15-589-8300 Fax +15-583-4207 Hischi Burope GmbH Bedronic Components Group Cartinertal Burope Danscher Straße 3 D-85622 Feldkirchen München Tet 089-9 94 80-0 Fex: 089-9 29 30 00

Hitachi Burope Ltd.
Bectronic Components Div.
Northern Burope Headquerters
Whitebrook Park
Lower Cook hem Road
Maidenhead
Berkshire \$1.68YA
Urited Hingdom
Tet 0628-588000
Fax: 0628-778322

Hitschi Asia Pte. Ltd 45 Collyer Quey \$20-00 Hitschi Tower Snappore 0104 Tet 535-2100 Fex: 535-1533

Hischi Ásia (Hong Kong) Ltd. Unit 706, North Tower, World Finance Cartra, Herbour City, Carton Road Teim Sha Telui, Kowloon Hang Kong Tet 27:350218 Fex: 27:30607.4