

B24

FEMALE HEADER PROFILE : 5.0mm DUAL-ENTRY TYPE

PITCH: 2.54mm

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp DC



Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.



Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

• Mating Suggestion : C15, C16 & C19 series.

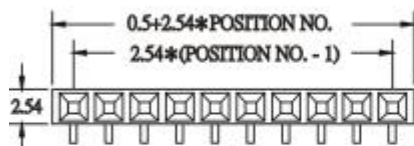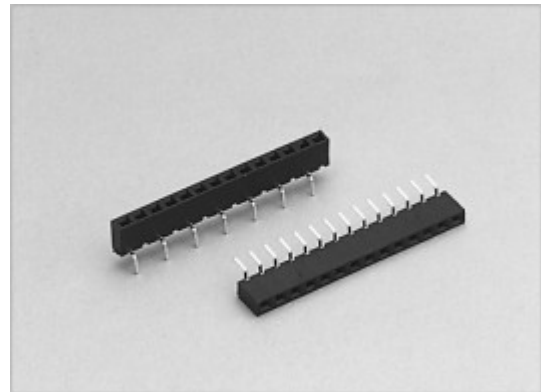



(TYPE A)

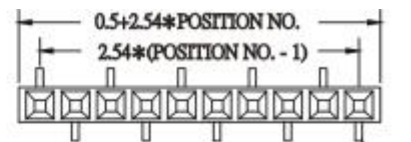

(TYPE B1)



(TYPE B2)

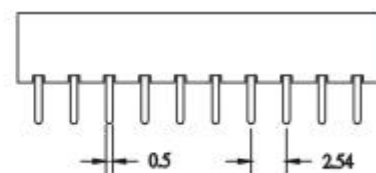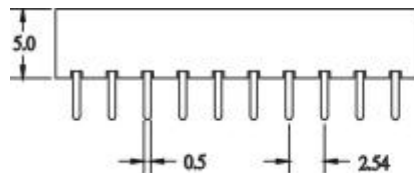

HOW TO ORDER:

B24 - 1 - 2 - 3 - 4 - 5

| 1.NO. OF CONTACT | 2.CONTACT MATERIAL | 3.CONTACT PLATING | 4.FOOT RANK TYPE | 5.INSULATOR COLOR |
|------------------------------|--------------------|---|---------------------------------------|-------------------|
| SINGLE ROW 1 * 2 - 1 * 40 | B: PHOSPHOR BRONZE | T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5μ" INCH GOLD B: 10μ" INCH GOLD C: 15μ" INCH GOLD D: 30μ" INCH GOLD | A: TYPE A B: TYPE B1 C: TYPE B2 | 1. BLACK |