RICOH

Rx5RW Series


Voltage Regulator

The Rx5RW Series are chip enable pin-equipped CMOS-based voltage regulators featuring 35mA to 80mA output. The polarity of the CE pin can be selected.

FEATURES


- Supply Current (Iss)Typ. 1.5µA (VIN=SET VOUT+2V)
- Standby Current (Istandby) ------ Typ. 0.1µA (in standby, except for C Version)
- Dropout Voltage (VDIF) ------ Typ. 0.04V (IOUT=1mA, VOUT=2.8V)
- Input Voltage Range (VIN) ------ Max. 8.0V
- Output Voltage Range (Vout) 1.5V to 6.0V (internally fixed)
- \bullet Output Voltage Accuracy ------± 2%
- \bullet Temp. coeff. of Output Voltage …… Typ. \pm 100ppm/°C
- Line Regulation
 Typ. 0.05%/V
- Fold-back Protection Circuit ------Current Limit Typ. 40mA
- Packages-----SON1612-6, SC-82AB

BLOCK DIAGRAMS

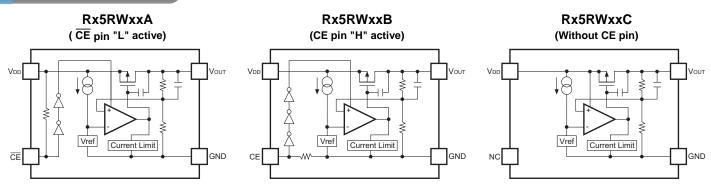

SELECTION GUIDES

Package	Quantity per Reel	Part No.
SON1612-6	4,000 pcs	RD5RWxx*A-TR-F
SC-82AB	3,000 pcs	RQ5RW xx*A-TR-F

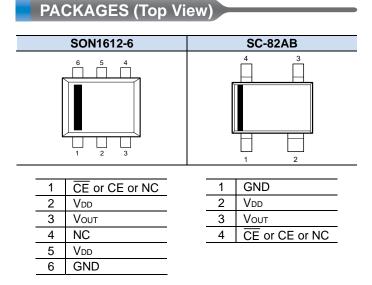


xx : Specify the output voltage within the range 1.5V (15) to 6.0V (60) in 0.1V steps.

Select the polarity of the CE pin from
 (A) "L" active or (B) "H" active, (C) without chip enable.

TYPICAL CHARACTERISTIC

Rx5RW30B Dropout Voltage vs. Output Current



APPLICATIONS

- Power source for hand-held communication equipment, cameras, and VCRs
- Very stable voltage reference

• Power source for battery-powered equipment

1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before
exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and
example application circuits for the products. The release of such information is not to be
construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic
components in standard applications (office equipment, telecommunication equipment,
measuring instruments, consumer electronic products, amusement equipment etc.). Those
customers intending to use a product in an application requiring extreme quality and reliability,
for example, in a highly specific application where the failure or misoperation of the product
could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system,
traffic control system, automotive and transportation equipment, combustion equipment, safety
devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but
semiconductor products are likely to fail with certain probability. In order to prevent any injury to
persons or damages to property resulting from such failure, customers should be careful enough
to incorporate safety measures in their design, such as redundancy feature, firecontainment


- feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
- 7. Anti-radiation design is not implemented in the products described in this document.
- 8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.

RICOH COMPANY., LTD. Electronic Devices Company

Ricoh presented with the Japan Management Quality Award for 1999. Ricoh continually strives to promote customer satisfaction, and shares the achievements of its management quality improvement program with people and society.



Ricoh awarded ISO 14001 certification.





Ricoh completed the organization of the Lead-free production for all of our products. After Apr. 1, 2006, we will ship out the lead free products only. Thus, all products that will be shipped from now on comply with RoHS Directive.

http://www.ricoh.com/LSI/

RICOH COMPANY, LTD.

Electronic Devices Company Shin-Yokohama office (International Sales) 3-2-3, Shin-Yokohama, Kohoku-ku, Yokohama City, Kanagawa 222-8530, Japan Phone: +81-45-477-1697 Fax: +81-45-477-1698

RICOH EUROPE (NETHERLANDS) B.V.

Semiconductor Support Centre
 Prof. W.H.Keesomlaan 1, 1183 DL Amstelveen, The Netherlands
 P.O.Box 114, 1180 AC Amstelveen
 Phone: +31-20-5474-309 Fax: +31-20-5474-791

RICOH ELECTRONIC DEVICES KOREA Co., Ltd. 11 floor, Haesung 1 building, 942, Daechidong, Gangnamgu, Seoul, Korea Phone: +82-2-2135-5700 Fax: +82-2-2135-5705

RICOH ELECTRONIC DEVICES SHANGHAI Co., Ltd. Room403, No.2 Building, 690#Bi Bo Road, Pu Dong New district, Shanghai 201203, People's Republic of China Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH COMPANY, LTD. Electronic Devices Company Taipei office

• Taipei office Room109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.) Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623