Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: http://www.renesas.com

April 1st, 2010 Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (http://www.renesas.com)

Send any inquiries to http://www.renesas.com/inquiry.

Notice

- 1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
- Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
- 3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
- 4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
- 5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
- 6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- 7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics. Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anticrime systems; safety equipment; and medical equipment not specifically designed for life support.
 - "Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
- 8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- 9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
- 10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majorityowned subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



HA17558B Series

Dual Operational Amplifier

REA03D0003-0200 Rev.2.00 Dec 24, 2008

Description

HA17558B is dual bipolar op-amp with improved characteristics compared to HA17558A. It has wide bandwidth, low noise, high slew rate; wide operating voltage range and high gain characteristics.

This product has a wide range of applications that is appropriate for audio application, as well as AC/DC converter.

Features

- Wide bandwidth: 7 MHz
- High speed: 3 V/µs
- Low input noise voltage: 1 µVrms
- Large DC voltage gain: 110 dB
- Operating voltage: ± 2 V to ± 18 V
- Package outline available in Pb free lead frame: DP-8
 SOP-8 (JEITA)
 SOP-8 (JEDEC)

Applications


- Audio AC-3 decoder system
- Audio amplifier
- AC/DC converter

Ordering Information


Part No.	Application	Package Code (Package Name)	Packing Abbreviation (Quantity)
HA17558B	Commercial use	PRDP0008AF-B (DP-8FV)	— (50 pcs/stick 1,000 pcs/box)
HA17558BF		PRSP0008DE-B (FP-8DGV)	EL (2,500 pcs/reel)
HA17558BRP		PRSP0008DD-C (FP-8DCV)	EL (2,500 pcs/reel)

Note: This product is designed for consumer use and not for automotive and industry.

Pin Arrangement

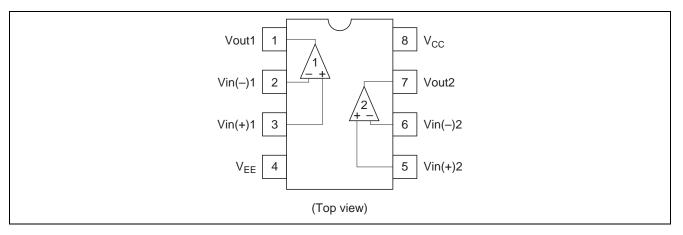

Circuit Schematic (1/2)

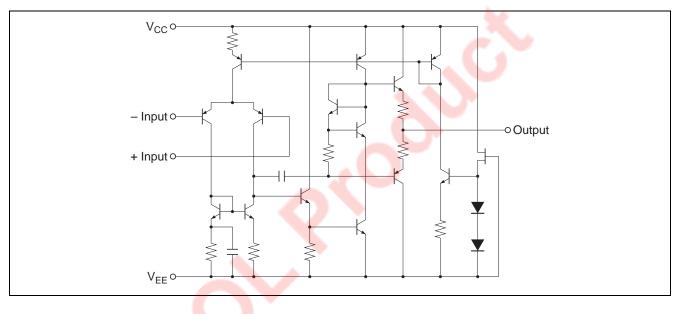

Absolute Maximum Ratings

$(Ta = 25^{\circ}C)$

ltem	Symbol	HA17558B	HA17558BF	HA17558BRP	Unit
Supply Voltage	V _{CC}	18	18	18	V
	VEE	-18	-18	-18	V
Differential input voltage	V _{IN} (diff)	±30	±30	±30	V
Common mode input voltage	V _{CM} * ³	±15	±15	±15	V
Power dissipation	PT	670 * ¹	385 * ²	385 * ²	mW
Operating temperature	Topr	-40 to +85	-40 to +85	-40 to +85	°C
Storage temperature	Tstg	-55 to +125	-55 to +125	-55 to +125	°C

Notes: 1. This is the allowable value up to $Ta = 45^{\circ}C$. Derate by 8.3 mW/°C above that temperature.

2. These are the allowable values up to $Ta = 60^{\circ}C$ mounting on 40 mm × 40 mm × 1.6 mm (t) 10% wiring density glass epoxy board. Derate by 5.9 mW/°C above that temperature.

3. If the supply voltage is less than ± 15 V, input voltage should be less than supply voltage.


Electrical Characteristics

		(Ta =	$25^{\circ}\mathrm{C}, \mathrm{V}_{\mathrm{CC}}$	=+15 V, V	$V_{\rm EE} = -$	15 V, unless otherwise specified)
ltem	Symbol	Min	Тур	Max	Unit	Test Conditions
Input offset voltage	V _{IO}	—	0.5	3	mV	$R_S \le 10 \ k\Omega$
Input offset current	I _{IO}	—	5	50	nA	
Input bias current	I _{IB}	—	65	250	nA	
Supply current	I _{CC}	—	2.5	4	mA	
Power supply rejection ratio	PSRR	80	100	—	dB	$R_S \le 10 \ k\Omega$
Voltage gain	Av	85	110	_	dB	$R_L \geq 2 \ k\Omega, \ V_O = \pm 10 \ V$
Common mode rejection ratio	CMR	80	100	_	dB	$R_S \le 10 \ k\Omega$
Output swing voltage	Vos	±10	±13	_	V	$R_L \ge 2 \ k\Omega$
		±12	±14	_	V	$R_L \ge 10 \ k\Omega$
Output sink current	IOSINK	_	70	_	mA	$V_{IN(-)} = 1 V, V_{IN(+)} = 0 V,$
						$V_0 = 2 V$
Output source current	IOSOURCE	_	45		mA	$V_{IN(-)} = 0 V, V_{IN(+)} = 1 V,$
						$V_0 = 2 V$
Slew rate	SR	—	3		V/µs	
Equivalent input noise voltage	V _{NI}	—	1	—	μVrms	RIAA, $R_S = 1 \text{ k}\Omega$, 30 kHz LPF
Gain bandwidth product	fu	—	7	—	MHz	f = 10 kHz
Total harmonic distortion	THD		0.0045		%	f = 1 kHz, V _O = 1 Vrms

a 17


Table of Graphs


Elec	Figure	
Open loop voltage gain	vs. Frequency f	1
Output swing voltage	vs. Frequency f	2
Output swing voltage	vs. Load resistance R _L	3
Equivalent input noise voltage	vs. Frequency f	4
Input offset voltage	vs. Temperature Ta	5
Total harmonic distortion	vs. Output Voltage Vo	6

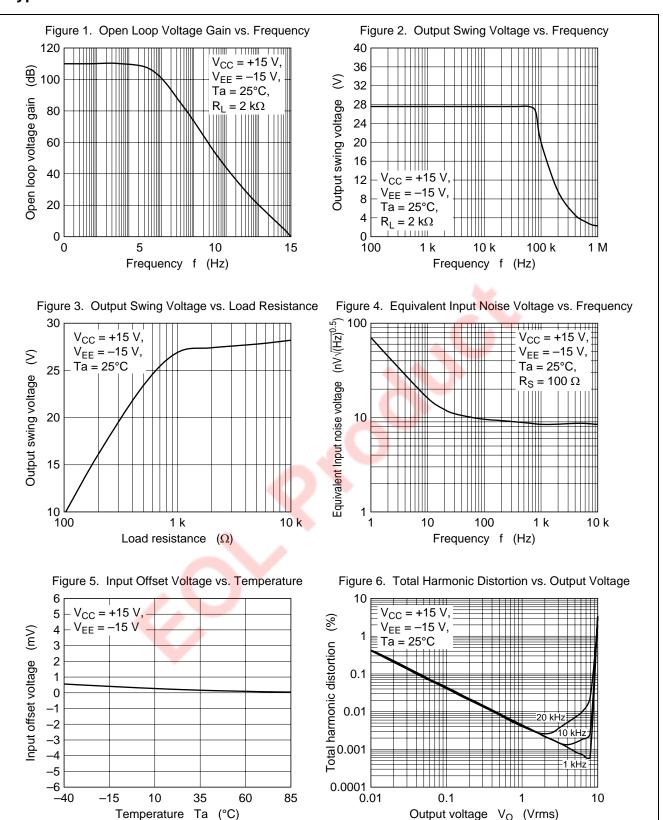

Typical Characteristics Curves


Package Dimensions

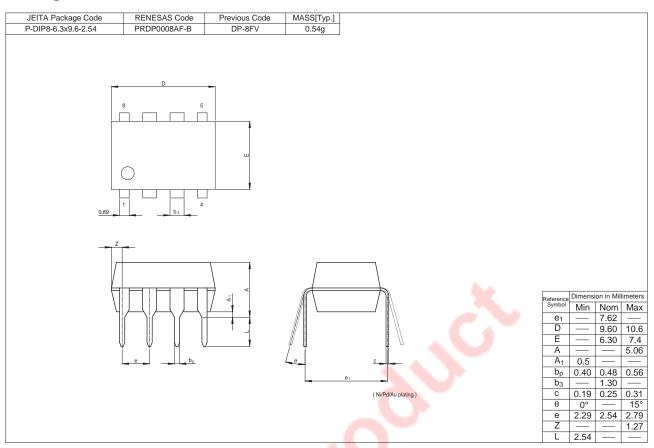

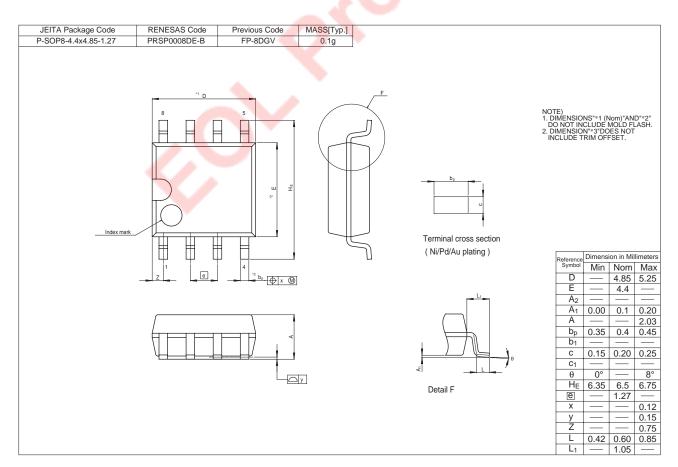

RENESAS

HA17558B Series

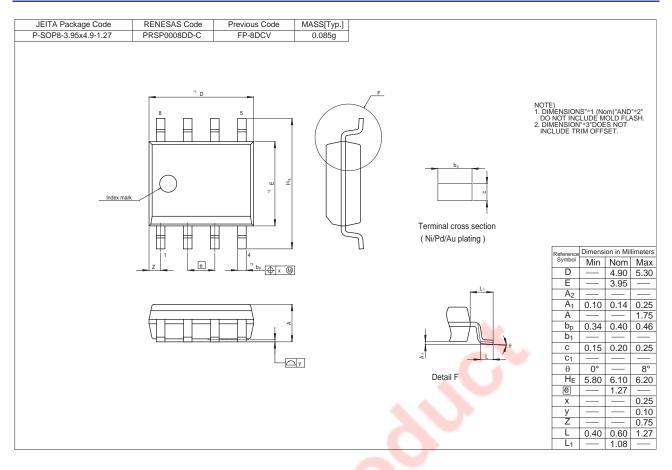

RenesasTechnology Corp. sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

- Benesas lechnology Corp. sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
 Pines
 This document is provided for reference purposes only so that Renesas customers may select the appropriate Renesas products for their use. Renesas neither makes warranties or representations with respect to the accuracy or completeness of the information in this document.
 But not infinited to, product date, diagrams, charts, programs, algorithms, and application scuch as the development of weapons of mass and regulations, and proceedures required by such laws and regulation.
 All information included in this document, included in this document, included in this document (included in this document).
 You should not use the products or the technology described in this document (included in this document).
 All information included in this document (included in this document).
 We use the saved. Such information, theory is subject to charge without any prior notice. Before purchasing or using any Renesas products for the technology described herein, you should follow the applicable export control laws and regulations.
 Renesas has used reasonable care in compiling the information included in this document. Dut Renesas assumes no liability whatsoever for any damages incurred as a set of each different information included in this document. Dut Renesas assumes no liability of this tocuer or otherwise in systems the failude application. Renessas products for the technology described herein, one included in the information in this document.
 We use the subset Sub Mergin on the information included in this document.
 We use the subset Sub Mergin on the information inf



RENESAS SALES OFFICES

http://www.renesas.com

Refer to "http://www.renesas.com/en/network" for the latest and detailed information.

Renesas Technology America, Inc

450 Holger Way, San Jose, CA 95134-1368, U.S.A Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K. Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology (Shanghai) Co., Ltd. Unit 204, 205, AZIACenter, No.1233 Lujiazui Ring Rd, Pudong District, Shanghai, China 200120 Tel: <86> (21) 5877-1818, Fax: <86> (21) 6887-7858/7898

Renesas Technology Hong Kong Ltd. 7th Floor, North Tower, World Finance Centre, Harbour City, Canton Road, Tsimshatsui, Kowloon, Hong Kong Tel: <852> 2265-6688, Fax: <852> 2377-3473

Renesas Technology Taiwan Co., Ltd. 10th Floor, No.99, Fushing North Road, Taipei, Taiwan Tel: <886> (2) 2715-2888, Fax: <886> (2) 3518-3399

Renesas Technology Singapore Pte. Ltd.

1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632 Tel: <65> 6213-0200, Fax: <65> 6278-8001

Renesas Technology Korea Co., Ltd. Kukje Center Bldg. 18th Fl., 191, 2-ka, Hangang-ro, Yongsan-ku, Seoul 140-702, Korea Tel: <82> (2) 796-3115, Fax: <82> (2) 796-2145

Renesas Technology Malaysia Sdn. Bhd Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No.18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia Tel: <603> 7955-9390, Fax: <603> 7955-9510