



ENERGIZER NO. EN22



Industry Standard Dimensions in mm (inches)

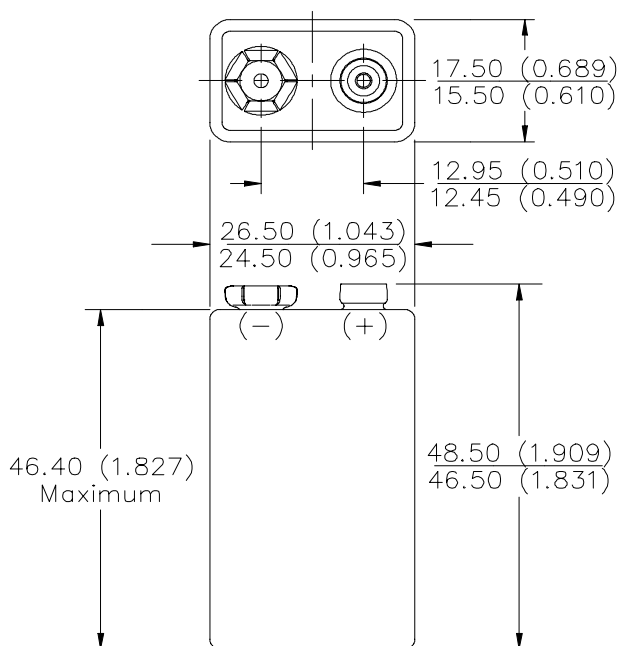


9V


NOT INTENDED FOR RETAIL TRADE

Chemical System:	Alkaline Zinc-Manganese Dioxide (Zn/MnO ₂) (No Added Mercury or Cadmium)
Designation:	ANSI-1604A, IEC-6LR61
Battery Voltage:	9.0 Volts
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Average Capacity:	625 mAh (to 0.8 volts/cell) (Rated capacity at 25 mA continuous drain)
Average Weight:	45.6 grams (1.6 oz.)
Volume:	21.1 cubic centimeters (1.3 cubic inch)
Cell:	Six No. 3-0316 in series
Jacket:	Metal
Shelf Life:	5 years (80% of rated capacity)


TEMPERATURE EFFECTS Typical Service to 4.8 Volts

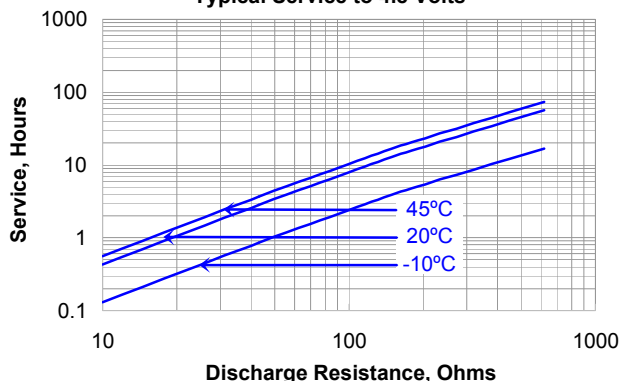

CONSTANT RESISTANCE PERFORMANCE Typical Service

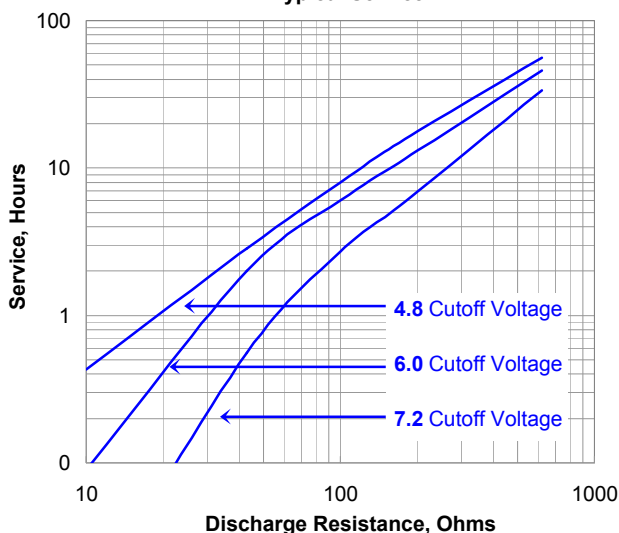

CONSTANT CURRENT DISCHARGE Typical Service

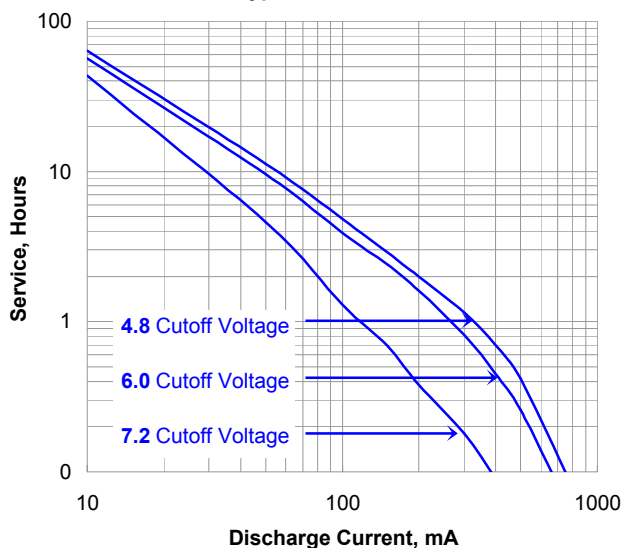


Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.




Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved

ENERGIZER NO. EN22

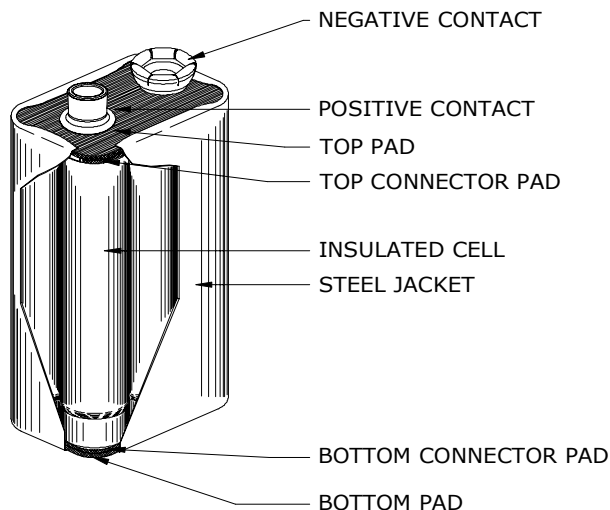

Industry Standard Tests @ 20° C

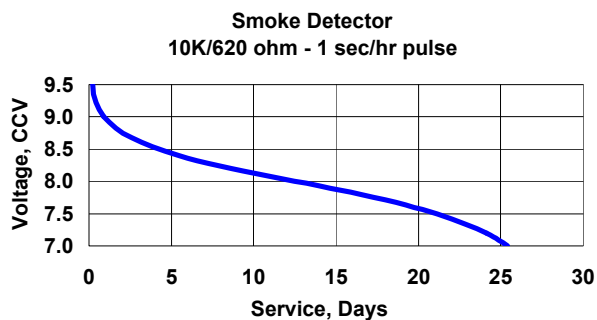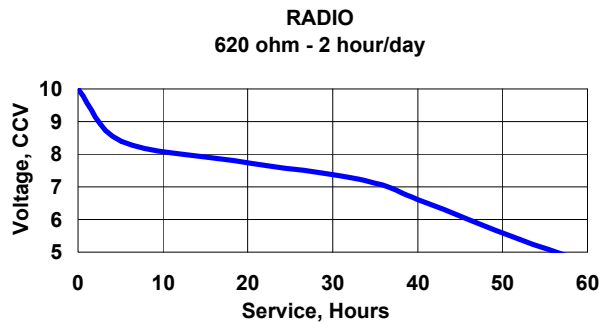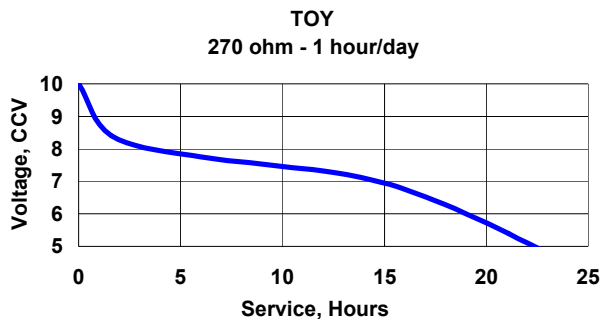

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved