## HIGH FREQUENCY MAGNETICS



**Application Note for Miniature Pulse Transformer** 

TM9919A

### 2795N Transformer Application Note

The 2795N transformer provides two transformation ratios to match both  $120\Omega$  and  $75\Omega$  line impedances with Lucent 5 V transceivers. The ratio of the two transformer impedance ratios is within 0.07% of the ratio of the two line impedances. This virtually perfect match allows the transformer to work with a single terminating network design for both line impedances. The transformer can also be used for  $100\Omega$  lines with a change in resistor values. For 2795N data sheet refer to document TM9918.

### Suggested External Line Termination Network for Lucent 5 V Line Transceivers

A suggested line termination network consisting of the 2795N transformer, a capacitor, and resistors arranged to provide the proper voltage gain and impedance matching to the characteristic impedance of the transmission line is shown below. The diagram shows the appropriate external components for a receive line interface and a transmit line interface for one channel. The network is designed to operate with both E1 cable impedances ( $75\Omega$  and  $120\Omega$ ) with no change in components. For DS1 applications ( $100\Omega$ ), only the resistor values need to be changed. The same transformer can be used for all three cable impedances in both receive and transmit operation. Figure 1 below shows the proper connections for each cable impedance. The components and values are listed in Table 1 (see next page).

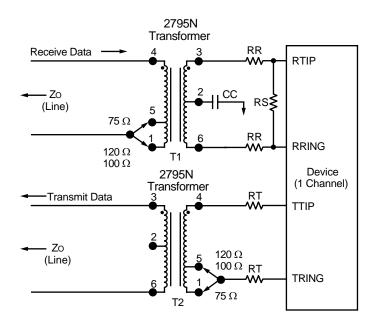


Figure 1. Connections for each cable impedance

©1999 Bel Fuse Inc. Specifications subject to change without notice. 06.99



# **HIGH FREQUENCY MAGNETICS**

**Application Note for Miniature Pulse Transformer** 

## 2795N Transformer Application Note

| Symbol | Name                     | Value        |              |             |
|--------|--------------------------|--------------|--------------|-------------|
| Zo     | Characteristic impedance | 75Ω (E1)     | 120Ω (E1)    | 100Ω (DS1)  |
| CC     | Center tap capacitor     | 0.1 μF       | 0.1 μF       | 0.1 μF      |
| RR     | Receive series resistor  | $36.5\Omega$ | $36.5\Omega$ | 30.1Ω       |
| RS     | Receive shunt resistor   | $64.9\Omega$ | $64.9\Omega$ | 53.6Ω       |
| RT     | Transmit series resistor | 25.5Ω        | 25.5Ω        | $4.6\Omega$ |
| T1, T2 | Bel part number          | 2795N        | 2795N        | 2795N       |

Table 1. Line termination components and values

©1999 Bel Fuse Inc. Specifications subject to change without notice. 06.99

Bel Fuse Inc. 198 Van Vorst Street Jersey City, NJ 07302 Tel 201-432-0463 Fax 201-432-9542 www.belfuse.com Bel Fuse Ltd. 8F / 8 Luk Hop Street San Po Kong Kowloon, Hong Kong Tel 852-2328-5515 Fax 852-2352-3706 www.belfuse.com

## **EUROPE**

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite F23, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com