

A04

IDC SOCKET SINGLE ROW

PITCH: 2.54mm

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp DC

Contact Resistance : 30 mΩ max.






Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

♦ Terminated with 2.54mm pitch flat ribbon cable.

♦ Mating Suggestion : C15, C16 series.

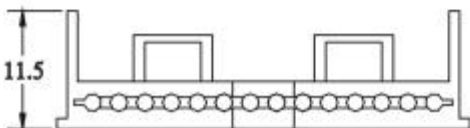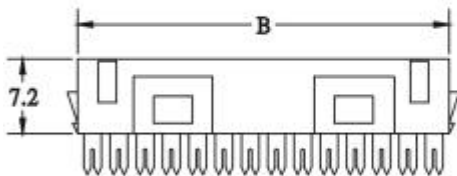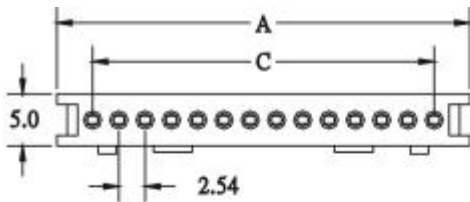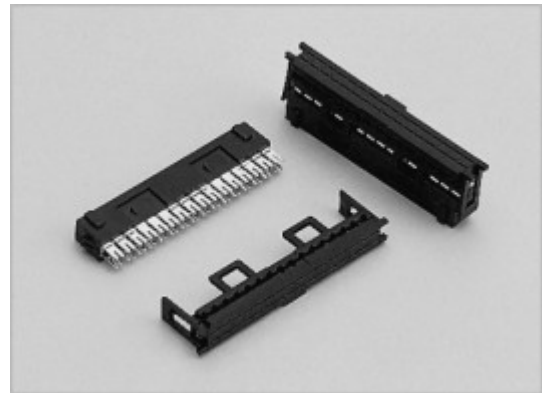

POSITION	A	B	C
14	39.92	35.92	33.02
16	45.00	41.00	38.10

HOW TO ORDER:

A04 - 1 - 2 - 3 - 4

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
14 16	B: PHOSPHOR BRONZE	T: TIN PLATED	1. BLACK