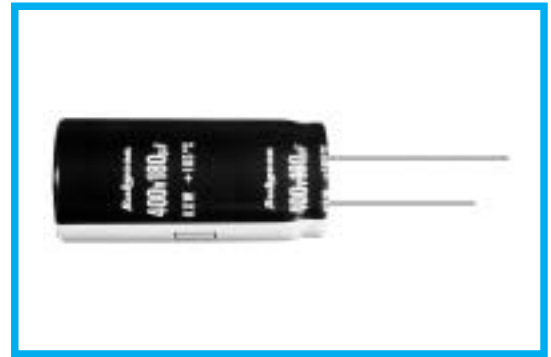


KXW SERIES
◆FEATURES

- Load Life : 105°C 2000 hours.
- Body diameter of ϕ 10mm to ϕ 18mm with high ripple current capability.
- This series is one class smaller than the current AXW series.
- For switching adapter.
- RoHS compliance.


◆SPECIFICATIONS

Items	Characteristics				
Category Temperature Range	-25~+105°C				
Rated Voltage Range	200 · 400 · 420 · 450V.DC				
Capacitance Tolerance	±20% (20°C, 120Hz)				
Leakage Current(MAX)	$I=3\sqrt{CV}$ (After 5 minutes application of rated voltage) I =Leakage Current(μ A) C =Rated Capacitance(μ F) V =Rated Voltage(V)				
Dissipation Factor(MAX) (tan δ)	Rated Voltage (V)	200	400	420~450	(20°C, 120Hz)
		0.12	0.15	0.20	
Endurance	After applying rated voltage with rated ripple current for 2000hrs at 105°C, the capacitors shall meet the following requirements.				
	Capacitance Change	Within ±20% of the initial value.			
	Dissipation Factor	Not more than 200% of the specified value.			
	Leakage Current	Not more than the specified value.			
Impedance Ratio(MAX)	Rated Voltage (V)	200	400~450	(120Hz)	
	Z(-25°C)/Z(20°C)	3	8		

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Frequency (Hz)		60(50)	120	500	1k	10k \leq
Coefficient	200WV	0.8	1.0	1.20	1.30	1.40
	400~450WV	0.8	1.0	1.25	1.40	1.50

◆PART NUMBER

□□□	KXW	□□□□□	□	□□□	□□	DXL
Rated Voltage	Series	Rated Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

◆ DIMENSIONS

(mm)

ϕD	10	12.5	14.5	16	18
ϕd	0.6		0.8		
F	5.0		7.5		
α	2.0				

◆ STANDARD SIZE, RATED RIPPLE CURRENT

Cap(μF)	WV φD	200					400				
		φ 10	φ 12.5	φ 14.5	φ 16	φ 18	φ 10	φ 12.5	φ 14.5	φ 16	φ 18
27							10X30 : 0.24				
33							10X35 : 0.28				
39							10X40 : 0.32				
47								12.5X30 : 0.37			
56								12.5X35 : 0.42			
68								12.5X40 : 0.48	14.5X30 : 0.48		
82		10X30 : 0.40							14.5X35 : 0.52		
100		10X35 : 0.46							14.5X40 : 0.58	16X30 : 0.58	
120		10X40 : 0.53								16X35 : 0.67	18X30 : 0.67
150			12.5X30 : 0.62							16X40 : 0.77	18X35 : 0.77
180			12.5X35 : 0.70								18X40 : 0.88
220			12.5X40 : 0.80	14.5X30 : 0.80							18X45 : 1.00
270				14.5X35 : 0.87	16X30 : 0.87						
330					16X35 : 1.01	18X30 : 1.01					
390					16X40 : 1.13	18X35 : 1.13					
470						18X40 : 1.27					
560						18X45 : 1.39					

Cap(μF)	WV φD	420					450				
		φ 10	φ 12.5	φ 14.5	φ 16	φ 18	φ 10	φ 12.5	φ 14.5	φ 16	φ 18
18							10X30 : 0.18				
22		10X30 : 0.20					10X35 : 0.21				
27		10X35 : 0.23					10X40 : 0.25				
33		10X40 : 0.27						12.5X30 : 0.28			
39			12.5X30 : 0.31					12.5X35 : 0.32			
47			12.5X35 : 0.36					12.5X40 : 0.38	14.5X30 : 0.38		
56			12.5X40 : 0.43	14.5X30 : 0.43					14.5X35 : 0.44	16X30 : 0.44	
68				14.5X35 : 0.51	16X30 : 0.51				14.5X40 : 0.49	16X35 : 0.49	
82				14.5X40 : 0.57	16X35 : 0.57					16X40 : 0.55	18X30 : 0.55
100					16X40 : 0.61	18X30 : 0.61					18X35 : 0.65
120						18X35 : 0.66					18X40 : 0.74
150						18X40 : 0.71					18X45 : 0.80

Please check with us about individual WV, Cap., size and dimensions.

Size φ D×L(mm) ↑
Ripple Current (A r.m.s./120Hz, 105°C) ↑