


Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	139.85	140	140.15
Insertion Loss	dB	-	23	25
1 dB Bandwidth	MHz	5.44	5.76	-
3 dB Bandwidth	MHz	6	6.22	-
40 dB Bandwidth	MHz	-	7.97	8.34
50 dB Bandwidth	MHz	-	8.15	-
Passband Variation	dB	-	0.8	0.9
Absolute Delay	usec	-	1.58	-
Group Delay Variation($f_0 \pm 3\text{MHz}$)	nsec	-	70	90
Ultimate Rejection	dB	50	55	-
Material Temperature coefficient	KHz/°C	-2.52		
Ambient Temperature	°C	25		
Package Size	SMD13.3*6.5			

Notes:

1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

Matching Configuration

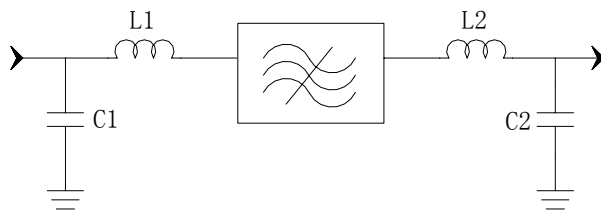


L1=56nH L2=82nH


C1=C2=18pF

Source/Load Impedance=50 ohm


Notes - Component values may change depending on board layout.

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBT14078	
		Rev. Date	2006-1-13	
		Rev.	1.0	Page

Package Dimension

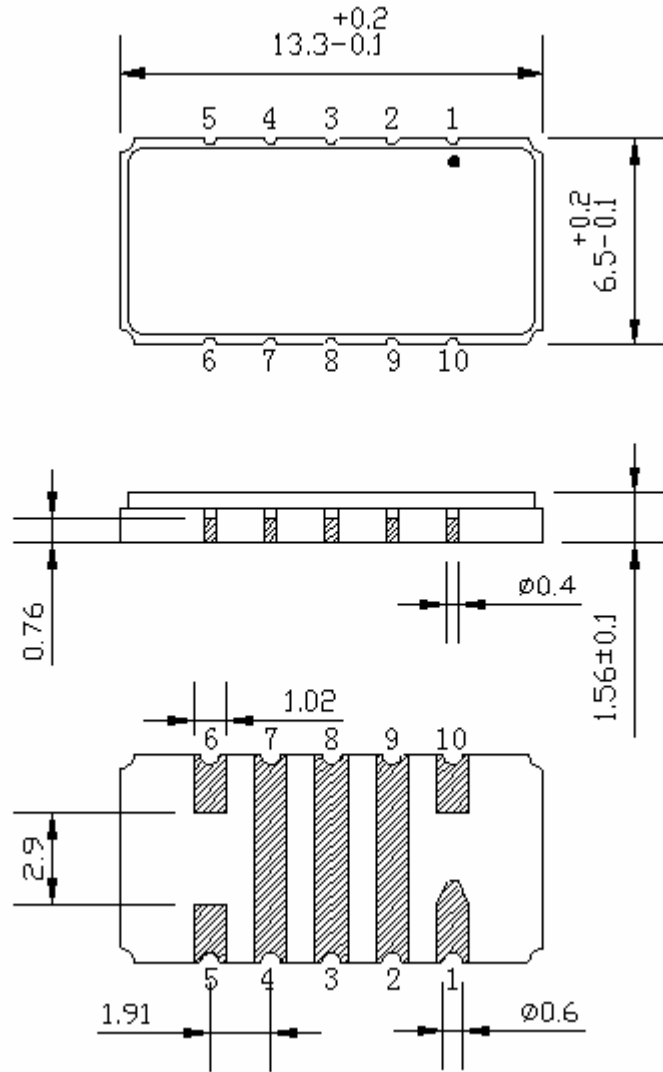


Input:1
Output:6


	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBT14078	
		Rev. Date	2006-1-13	
		Rev.	1.0	Page

Typical Performance


Frequency Respond

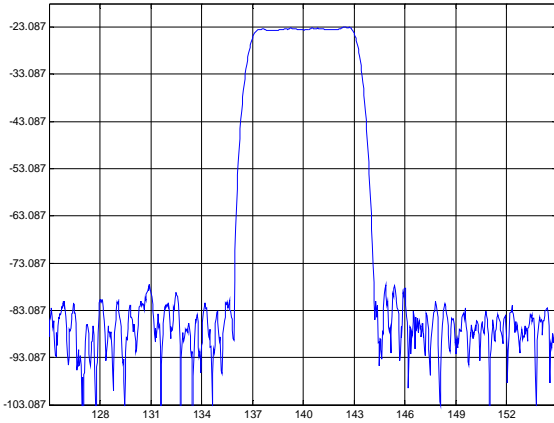


Passband Respond

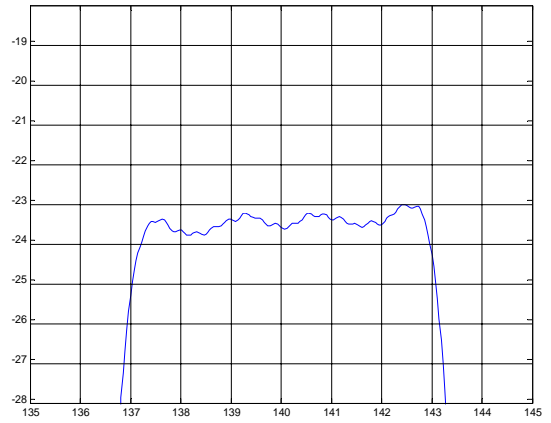


Group Delay Variation($f_0 \pm 3\text{MHz}$)

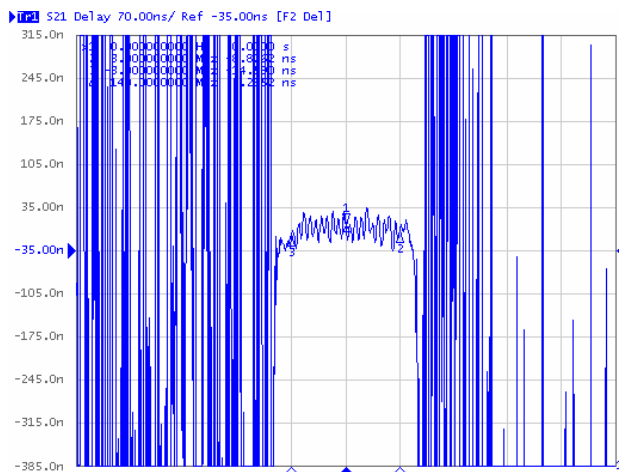


Phase Linearity($f_0 \pm 3\text{MHz}$)

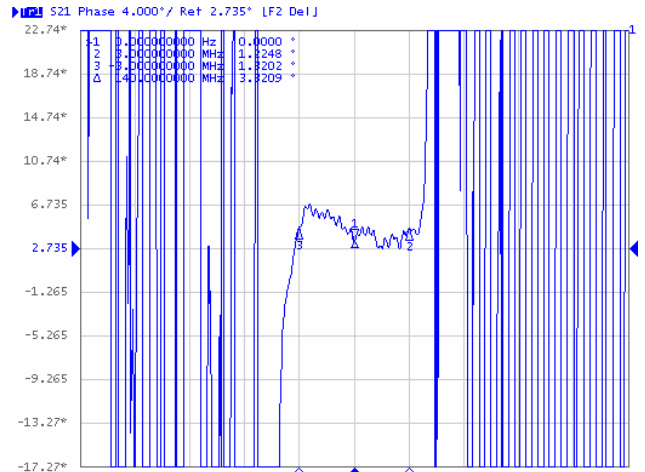


Smith Chart S11

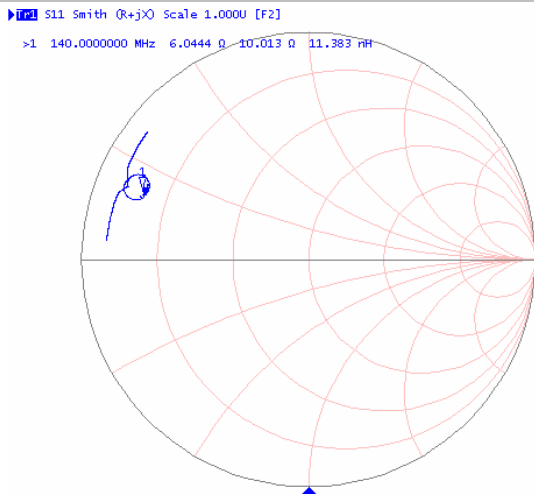

Smith Chart S22

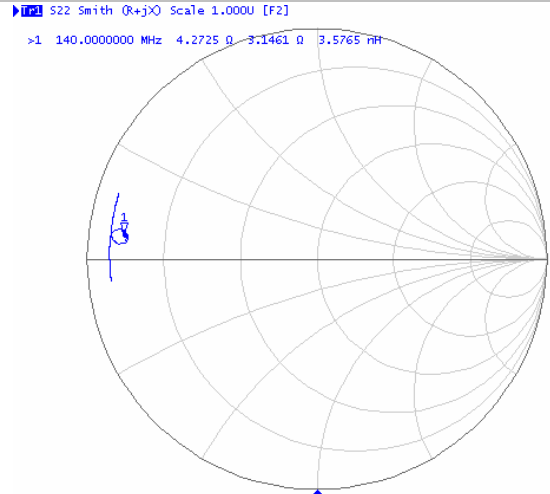

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBT14078	
		Rev. Date	2006-1-13	
		Rev.	1.0	Page