
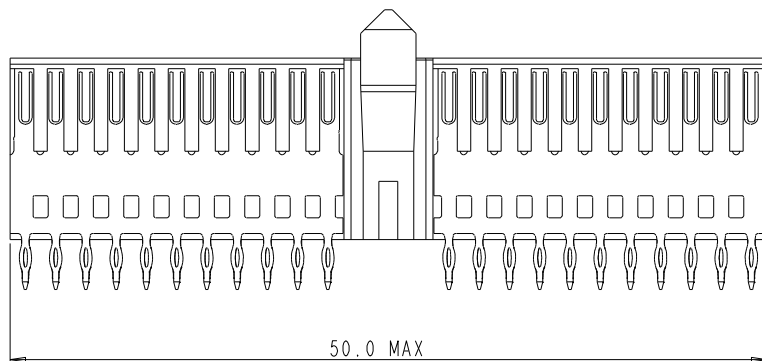
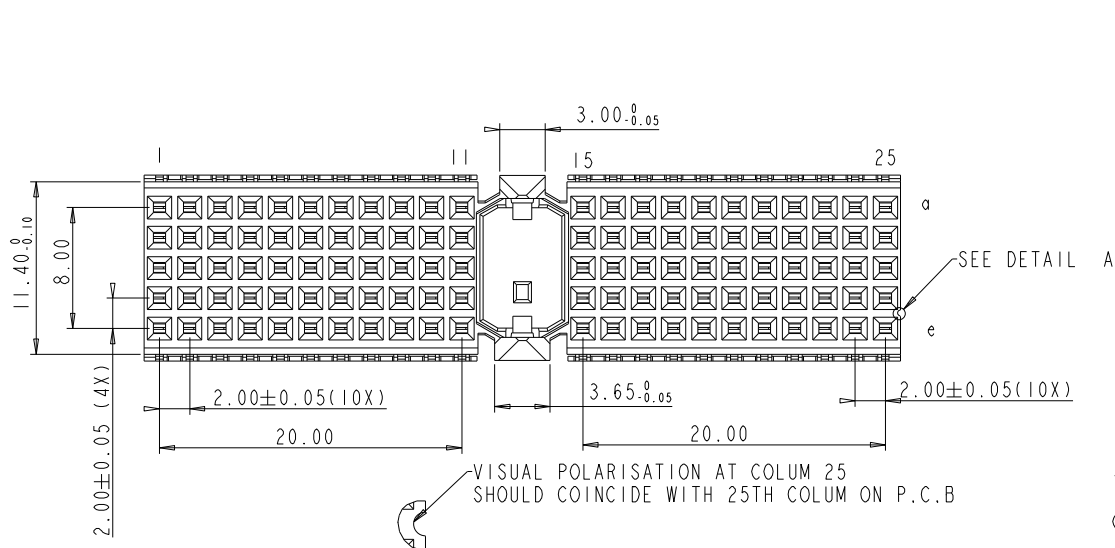


LAY OUT
P.C.B -HOLE

(FRONT SIDE)

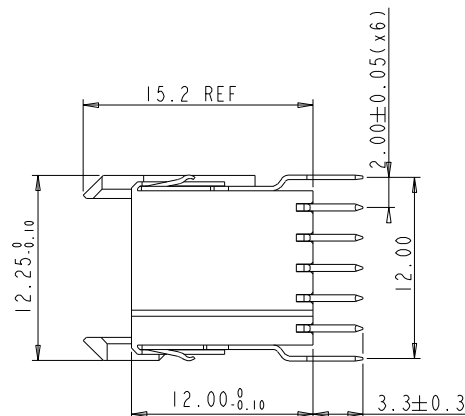

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT /CONT)

OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX

INSERTION FORCE : 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN/CONT

INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES 1. " " LEAD FREE INDICATOR : LF=LEAD FREE
PERFORMANCE LEVEL INDICATION
(REF DWG NO.BSC .201844.003)

2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.

3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001

4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION	KN	14-09-01
B	104-0109	ALEX E	27-11-04
C	0605-0278	Kason	02-08-05
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

Material			Spec ref				
Mat code			✓	tolerance	projection		
Heat treat				1DEC±0.2 1DEC 2DEC±0.1 2DEC ANGLE±1° HOEKEN			
Plating/Finish							
Dr	M.Fret	30-10-97			size	Scale	
Eng			Product family MILLIPACS		A4	2.000	
Chr			Model Name		ECN		
Appr			Model Revision		REL Level		
		title MILLIPACS 2/TYPE A (W/O LOC.PEG)/SHIELDED			dwg no BSC201907009		Rev C
Pro/E file		catalog	HM2610PE5101----		CUSTOMER DRAWING		sheet 1 of 1