

NON-ISOLATED DC/DC CONVERTERS


2.4 V - 5.5 V Input 0.75 V - 3.63 V/10 A Output

bel
POWER PRODUCTS

VRBC-10F2Ax Series

RoHS Compliant

- Non-Isolated
- High Efficiency
- High Power Density
- Fixed Frequency (300kHz)
- OCP/SCP
- Flexible Output Voltage Sequencing
- Over Temperature Protection
- Under-Voltage Lockout (UVLO)
- Wide Input Range
- Wide Trim Range
- Remote On/Off
- Remote Sense
- Converter Can Sink and Source Current
- Active Low/High (option)

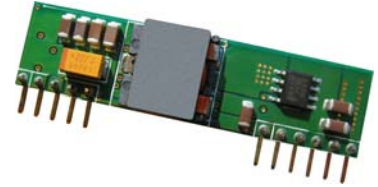

Description

The Bel VRBC-10F2Ax modules are a series of non-isolated dc/dc converters that deliver up to 10 A of output current with full load efficiency of 94% at 3.3 V output. These modules provide precisely regulated voltage programmable via external resistor from 0.75 V to 3.63 V over a wide range of input voltage (2.4 V-5.5 V). These modules have a sequencing feature that enables designers to implement various types of output voltage sequencing when powering multiple voltages on a board. The open-frame construction and small footprint enable designers to develop cost and space-efficient solutions. Standard features include remote On/Off, remote sense, over current protection, short current protection, wide input, and programmable output voltage.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active Low	Model Number Active High
0.75 V - 3.63 V ¹	2.4 V - 5.5 V	10 A	36.3 W	94%	VRBC-10F2AL	VRBC-10F2A0

Notes: 1. These modules use a buck topology, so the output voltages must be 0.5 V less than the input voltage.
2. Add "G" to the end of the Model Number to indicate Tray Packaging.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	5.8 V	
Output Enable Terminal Voltage	-0.3 V	-	5.8 V	
Sequencing Voltage ¹	-0.3 V	-	V _{in}	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Notes: All specifications are typical at 25 °C unless otherwise stated.

1. VRBC-10F2Ax series of modules include a sequencing feature that enables users to implement various types of output voltage sequencing in their applications. This is accomplished via an additional sequencing pin. When the sequencing feature is not used, tie the SEQ pin to V_{in}.

NON-ISOLATED DC/DC CONVERTERS

2.4 V - 5.5 V Input 0.75 V - 3.63 V/10 A Output



Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	2.4 V	-	5.5 V	$V_o, \text{set} \leq V_{in} - 0.5 \text{ V}$
Input Current (full load)				
$V_o = 3.3 \text{ V}$	-	7.0 A	8.06 A	
$V_o = 1.8 \text{ V}$	-	4.04 A	6.98 A	
$V_o = 0.75 \text{ V}$	-	1.89 A	4.06 A	
Input Current (no load)	-	80 mA	-	
Remote Off Input Current	-	15 mA	22 mA	
Input Reflected Ripple Current (pk-pk)	-	120 mA	-	Tested with two 100 μF /10 V tantalum input capacitors (P/N: TPSC107K010R0075 AVX) & simulated source impedance of 1 μH , 5 Hz to 20MHz.
Input Reflected Ripple Current (rms)	-	35 mA	-	
I^2t Inrush Current Transient	-	-	0.2 A ² s	
Turn-on Voltage Threshold	-	2.2 V	-	
Turn-off Voltage Threshold	-	2.0 V	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	-2% V_o, set	-	2% V_o, set	$V_{in} = 5 \text{ V}$, $I_o = I_{o, \text{max}}$ full load
Output Voltage Set Point	-3% V_o, set	-	3% V_o, set	Over all operating input voltages, resistive loads and temperature conditions
Load Regulation	-	0.4% V_o, set	-	$I_o = I_o$, min to I_o , max
Line Regulation	-	0.3% V_o, set	-	$V_{in} = V_{in}$, min to V_{in} , max
Regulation Over Temperature (-40 °C to +85 °C)	-	0.5% V_o, set	-	$T_{ref} = T_a$, min to T_a , max
Output Current	0 A	-	10 A	
Current Limit Threshold	15 A	-	30 A	
Short Circuit Surge Transient	-	-	2 A ² s	
Ripple and Noise (pk-pk)	-	25 mV	50 mV	Tested with 0-20MHz, 10 μF /16V tantalum capacitor & 1 μF /10V TDK ceramic capacitor at the output
Ripple and Noise (rms)	-	8 mV	15 mV	
Turn on Time	-	4 mS	8 mS	
Overshoot at Turn on	-	0% V_o, set	3% V_o, set	
Output Capacitance				
ESR $\geq 1 \text{ mohm}$	0 μF	-	1000 μF	
ESR $\geq 10 \text{ mohm}$	0 μF	-	4700 μF	
Transient Response				
50% ~ 100% Max Load	All	-	200 mV	di/dt=2.5A/ μS ; $V_{in}=5\text{V}$; and with 10 μF /16V tantalum capacitor & 1 μF /10V ceramic capacitor at the output
Settling Time		-	25 μS	
100% ~ 50% Max Load		-	200 mV	
Settling Time		-	25 μS	
50% ~ 100% Max Load	All	-	120 mV	di/dt=2.5A/ μS ; $V_{in}=5\text{V}$; and with two 150 μF /10V tantalum capacitors & 1 μF /10V ceramic capacitor at the output
Settling Time		-	50 μS	
100% ~ 50% Max Load		-	120 mV	
Settling Time		-	50 μS	

Note: All specifications are typical at nominal input ($V_{in}=5 \text{ V}$), full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

2.4 V - 5.5 V Input 0.75 V - 3.63 V/10 A Output



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency Vo=3.3 V Vo=1.8 V Vo=0.75 V	91% 86% 77%	94% 89% 80%	- - -	Measured at Vin=5 V, full load (current source)
Switching Frequency	250 kHz	300 kHz	350 kHz	
Over Temperature Shutdown	-	125 °C	-	
Output Trim Range (Wide Trim)	0.7525 V	-	3.63 V	Total adjustment of trim, setpoint and remote sense combined should not exceed 3.63 V. Vo=0.7525 V when trim pin open
Remote Sense Compensation	-	-	10%	
MTBF	6,900,000 hours			Calculated Per Bell Core SR-332 (Io = Nominal; Ta = 25°C)
Dimensions Inches (L × W × H) Millimeters (L × W × H)	2.0 x 0.5 x 0.36 50.8 x 12.7 x 9.2			
Weight	-	8.3g	-	

Note: All specifications are typical at 25°C unless otherwise stated.


Control Specifications

Parameter	Min	Typ	Max	Notes
Signal Low (Unit Off)	-0.3 V	-	0.3 V	VRBC-10F2A0; Remote On/Off pin open, Unit on.
Signal High (Unit On)	1.5 V	-	5.8 V	
Signal Low (Unit On)	-0.3 V	-	0.3 V	VRBC-10F2AL; Remote On/Off pin open, Unit on.
Signal High (Unit Off)	1.5 V	-	5.8 V	
Sequencing Voltage	0.05 V	-	Vin	Sequencing Voltage applied on SEQ should be higher than output voltage.
Sequencing Slew Rate Capability	-	-	2 V/mS	
Sequencing Delay Time	10 mS	-	-	Delay from Vin, min to application of voltage on SEQ pin
Tracking Accuracy Power-Up Power-Down	- -	100mV 200mV	200mV 400mV	

Output Trim Equations


Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{trim} = \frac{21.07}{V_{adj} - 0.7525} - 5.11$$

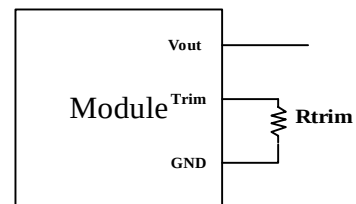

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (Vadj) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.

$$V_{rim} = 0.7 - 0.1698 \times (V_{adj} - 0.7525)$$

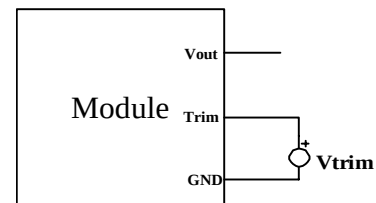


NON-ISOLATED DC/DC CONVERTERS


2.4 V - 5.5 V Input 0.75 V - 3.63 V/10 A Output




Efficiency Data

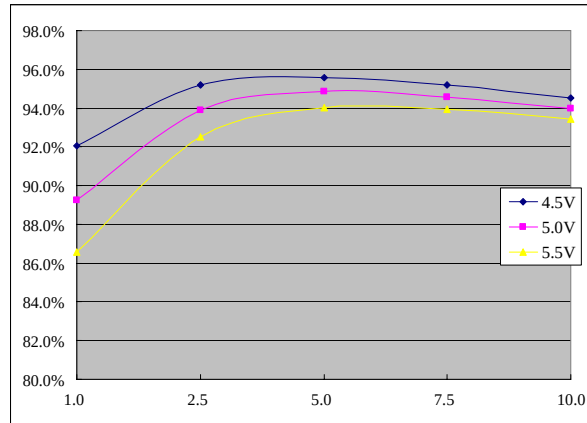

$V_o = 3.3\text{ V}$

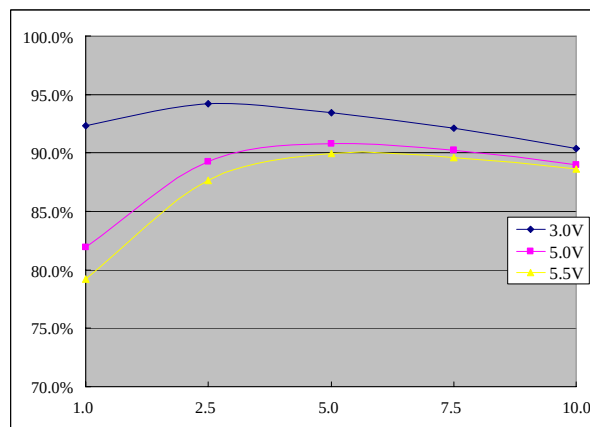

$V_o = 1.8\text{ V}$

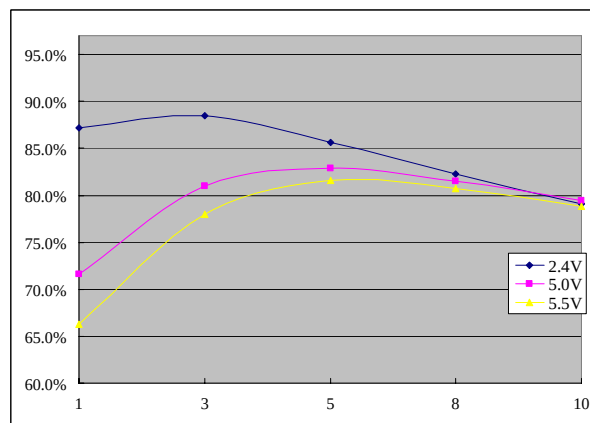


$V_o = 0.75\text{ V}$

NON-ISOLATED DC/DC CONVERTERS


2.4 V - 5.5 V Input 0.75 V - 3.63 V/10 A Output




Thermal Derating Curves

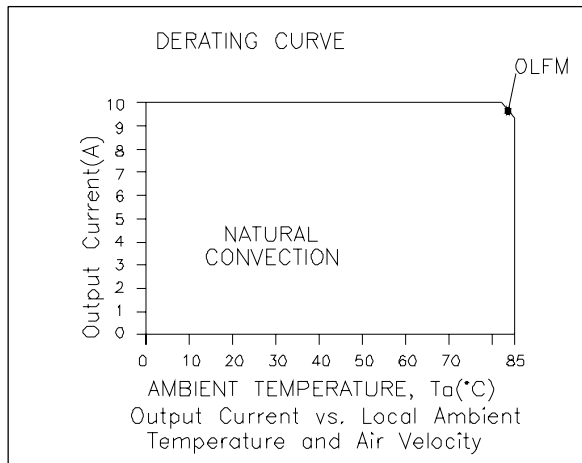


$V_{in}=5.0\text{ V}$, $V_o=3.3\text{ V}$

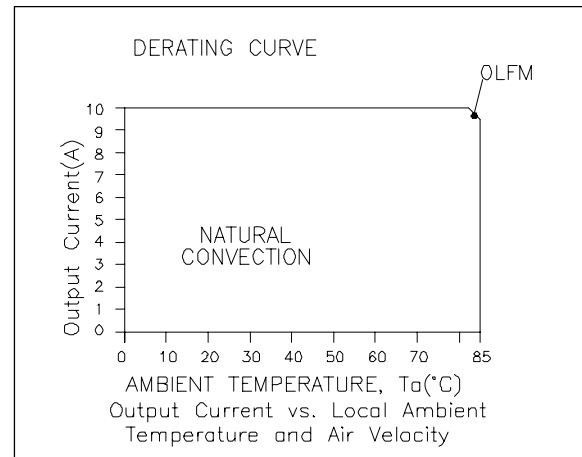

$V_{in}=5.0\text{ V}$, $V_o=1.8\text{ V}$

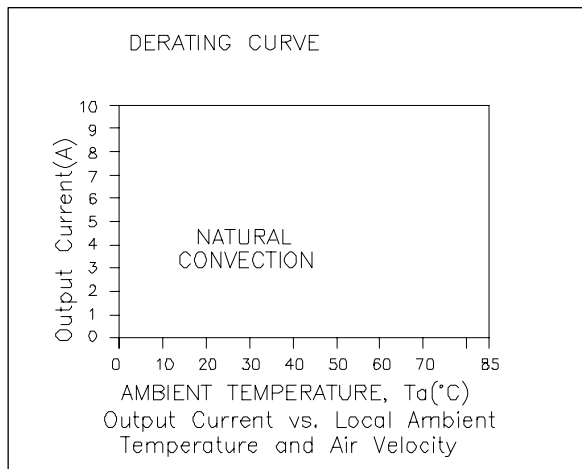

$V_{in}=5.0\text{ V}$, $V_o=0.75\text{ V}$

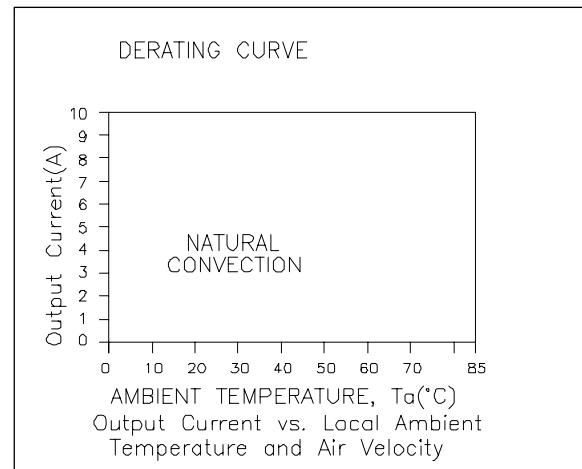


$V_{in}=3.3\text{ V}$, $V_o=0.75\text{ V}/1.8\text{ V}/2.5\text{ V}$

NON-ISOLATED DC/DC CONVERTERS


2.4 V - 5.5 V Input 0.75 V - 3.63 V/10 A Output




Ripple and Noise Waveforms

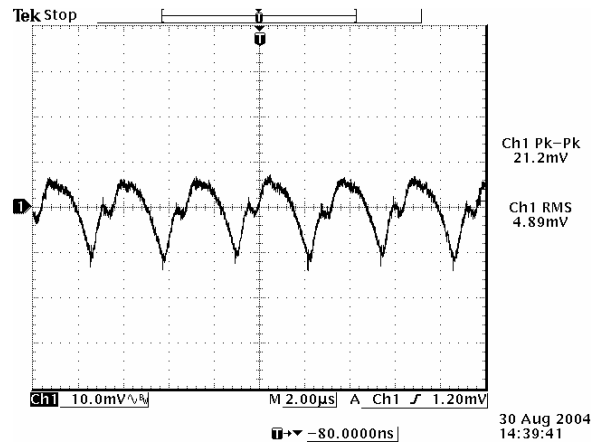

Vin=5 V, Vo=0.75 V

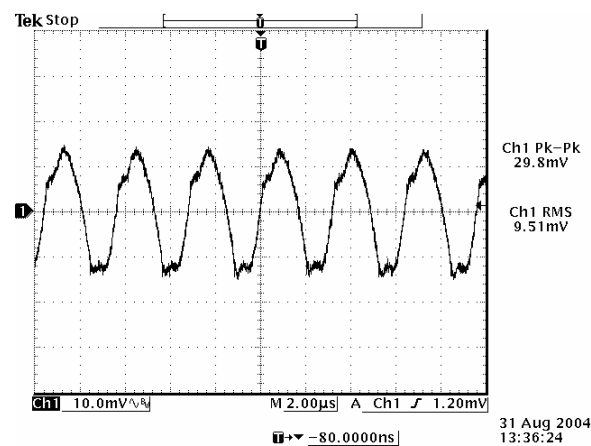

Vin=5 V, Vo=1.8 V

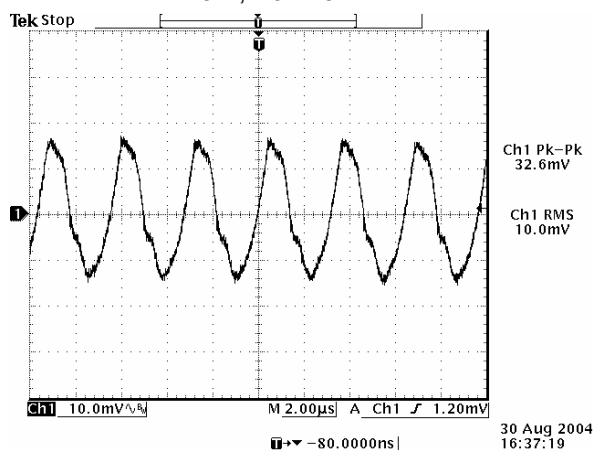

Vin=5 V, Vo=3.3 V



Note: Ripple and noise tested at 0-20 MHz BW, 10 μ F/16 V tantalum capacitor and 1 μ F/10 V ceramic capacitor, full load, and $T_a=25$ deg C.

NON-ISOLATED DC/DC CONVERTERS

2.4 V - 5.5 V Input 0.75 V - 3.63 V/10 A Output





Transient Response Waveforms

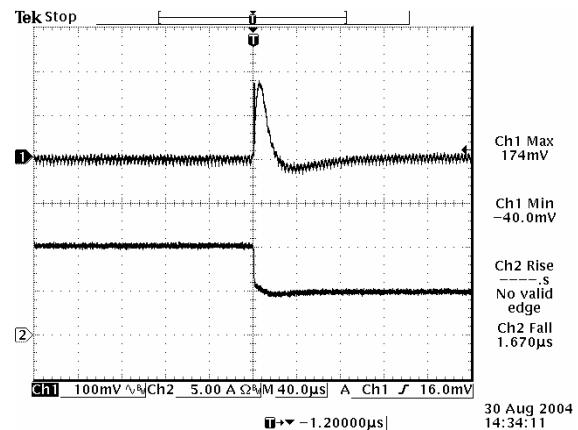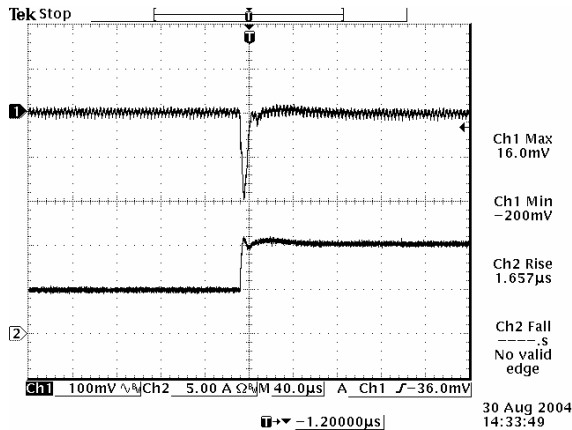



50% to 100% load step at $V_{in}=5$ V, $V_o=0.75$ V

100% to 50% load step at $V_{in}=5$ V, $V_o=0.75$ V

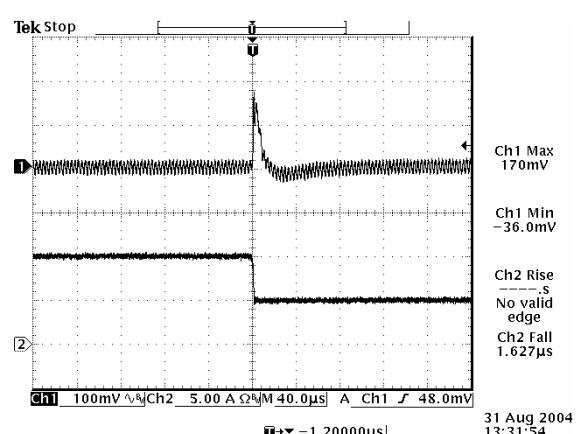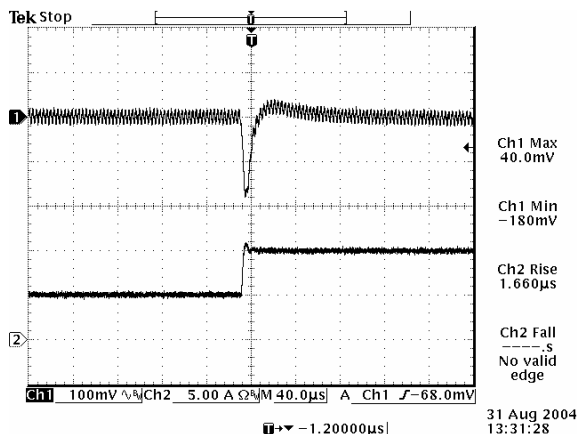

50% to 100% load step at $V_{in}=5$ V, $V_o=1.8$ V

100% to 50% load step at $V_{in}=5$ V, $V_o=1.8$ V

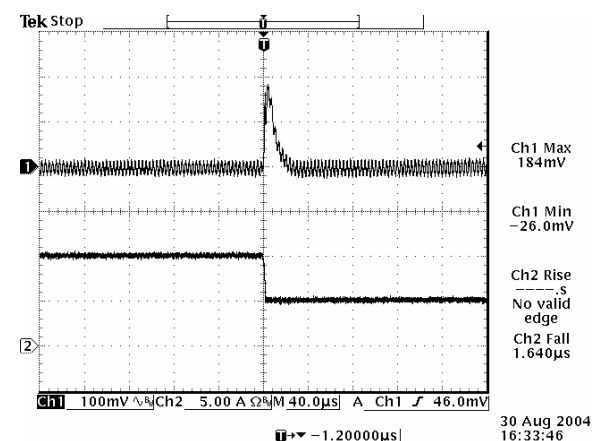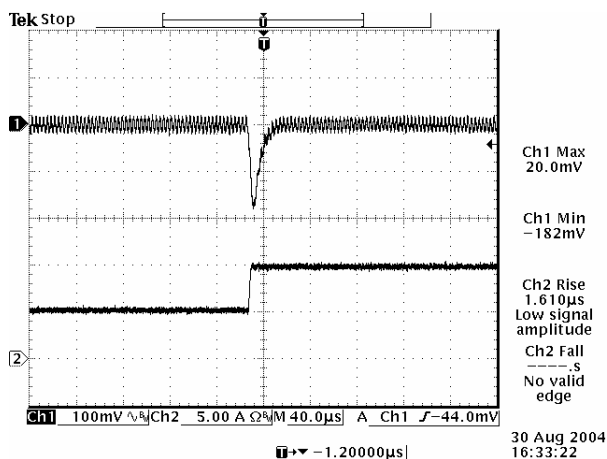

50% to 100% load step at $V_{in}=5$ V, $V_o=3.3$ V

100% to 50% load step at $V_{in}=5$ V, $V_o=3.3$ V


Note: Transient response tested at $di/dt=2.5$ A/ μ S, with 10 μ F/16 V Tantalum capacitor and 1 μ F/10 V ceramic capacitor, and $T_a=25$ deg C.

NON-ISOLATED DC/DC CONVERTERS

2.4 V - 5.5 V Input 0.75 V - 3.63 V/10 A Output



Mechanical Outline

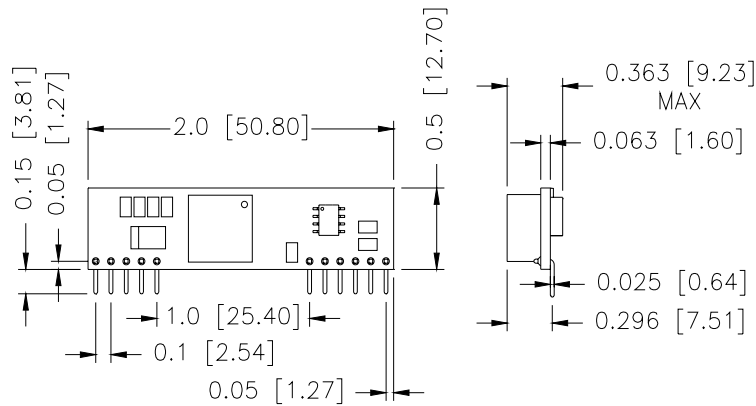


TOP VIEW


SIDE VIEW

BACK VIEW

UNIT: INCH [MM]

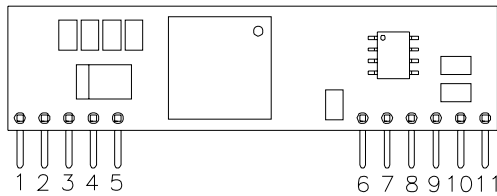

RECOMMENDED PAD LAYOUT

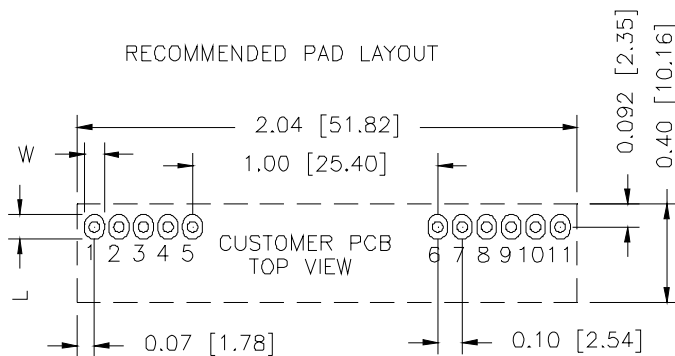

HOLE SIZE: $\varnothing 0.043 \pm 0.003$ [1.08 $\pm$ 0.08]
 PAD SIZE: W 0.063 ± 0.002 [1.63 $\pm$ 0.05]
 L 0.10 ± 0.004 [2.54 $\pm$ 0.10] BOTH SIDE

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Remote Sense
4	Vout
5	Ground
6	Ground
7	Vin
8	Vin
9	SEQ
10	Trim
11	Remote On/Off

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2006 Bel Fuse Inc. Specifications subject to change without notice. 031706

CORPORATE

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
 8F/ 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite G7, Preston
 Lancashire, PR1 8UD, U.K.
 Tel 44-1772-556601
 Fax 44-1772-888366
www.belfuse.com