

FAST RECOVERY RECTIFIERS


VOLTAGE RANGE: 100 --- 200 V
CURRENT: 3.0 A

FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon Alcohol, Isopropanol and similar solvents

MECHANICAL DATA

- ◇ Case: JEDEC DO--27, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.041 ounces, 1.15 grams
- ◇ Mounting position: Any

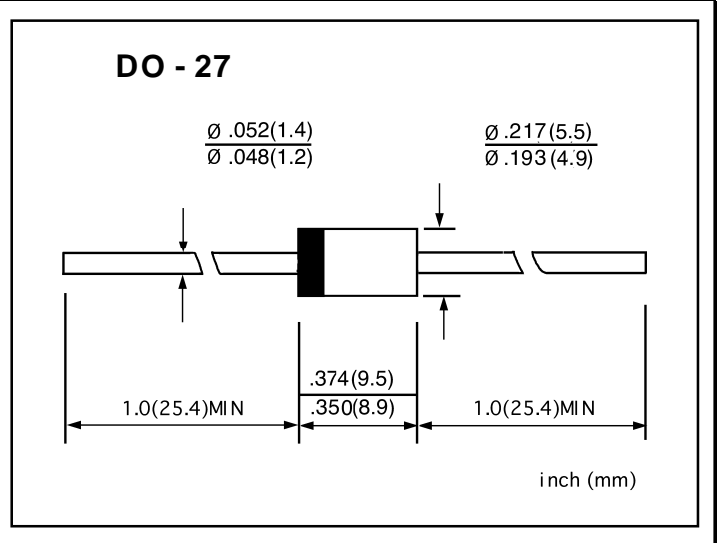

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 50Hz, resistive or inductive load. For capacitive load, derate by 20%.

| | | 30 DF1 | 30 DF2 | UNITS |
|--|-----------------|----------------|--------|--------------|
| Maximum recurrent peak reverse voltage | V_{RRM} | 100 | 200 | V |
| Maximum RMS voltage | V_{RMS} | 70 | 140 | V |
| Maximum DC blocking voltage | V_{DC} | 100 | 200 | V |
| Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$ | $I_{F(AV)}$ | 3.0 | | A |
| Peak forward surge current 10ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ C$ | I_{FSM} | 200.0 | | A |
| Maximum instantaneous forward voltage @ 3.0A | V_F | 1.0 | | V |
| Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=100^\circ C$ | I_R | 10.0 200.0 | | μA |
| Maximum reverse recovery time (Note1) | t_{rr} | 200 | | ns |
| Typical junction capacitance (Note2) | C_J | 32 | | pF |
| Typical thermal resistance (Note3) | $R_{\theta JA}$ | 22 | | $^\circ C/W$ |
| Operating junction temperature range | T_J | -55 ---- + 150 | | $^\circ C$ |
| Storage temperature range | T_{STG} | -55 ---- + 150 | | $^\circ C$ |


NOTE: 1. Measured with $I_F=0.5A$, $I_R=1A$, $t_{rr}=0.25A$.

2. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

www.galaxycn.com

FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

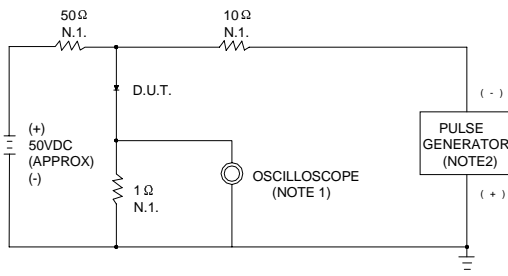

NOTES: 1. RISE TIME=7ns MAX. INPUT IMPEDANCE=1MΩ. 22pF
2. RISE TIME=10ns MAX. SOURCE IMPEDANCE=50Ω

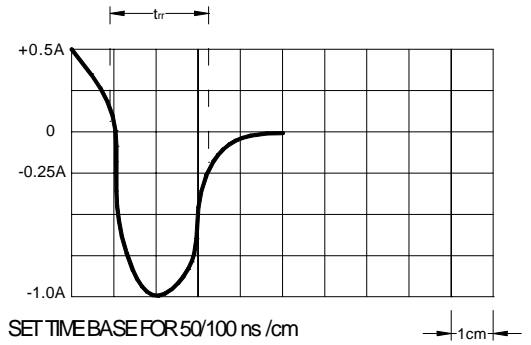


FIG.2 – FORWARD DERATING CURVE

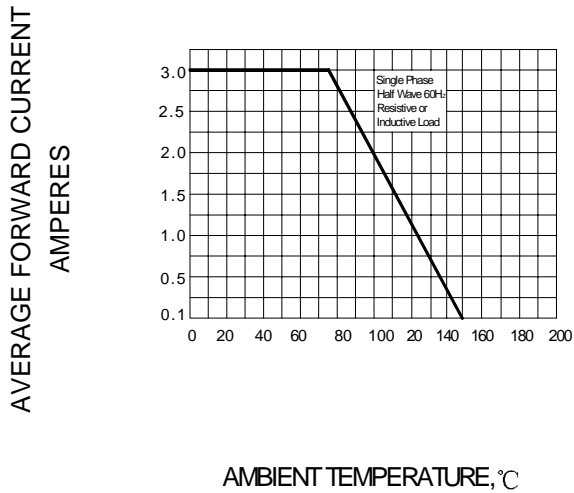


FIG.3 – PEAK FORWARD SURGE CURRENT

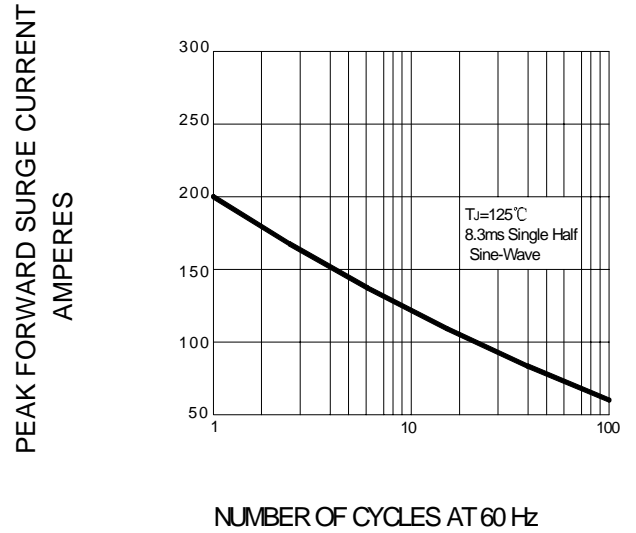


FIG.4 – TYPICAL FORWARD CHARACTERISTIC

