

# MC10178


## Binary Counter

The MC10178 is a four-bit counter capable of divide-by-two, divide-by-four, divide-by-eight or a divide-by-sixteen function.

Clock inputs trigger on the positive going edge of the clock pulse. Set and Reset inputs override the clock, allowing asynchronous "set" or "clear." Individual Set and common Reset inputs are provided, as well as complementary outputs for the first and fourth bits. True outputs are available at all bits.

- $P_D = 370 \text{ mW typ/pkg (No Load)}$
- $f_{\text{toggle}} = 150 \text{ MHz (typ)}$
- $t_r, t_f = 2.7 \text{ ns typ (20\%–80\%)}$

### LOGIC DIAGRAM

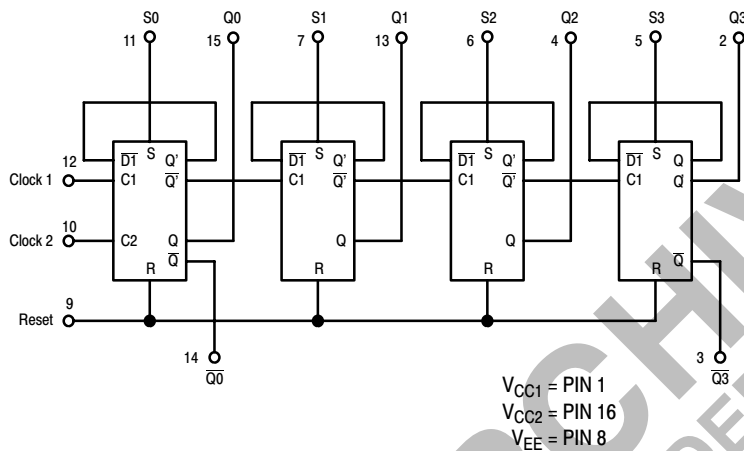

### TRUTH TABLE

| INPUTS |    |    |    |    |    |    | OUTPUTS  |    |    |    |
|--------|----|----|----|----|----|----|----------|----|----|----|
| R      | S0 | S1 | S2 | S3 | C1 | C2 | Q0       | Q1 | Q2 | Q3 |
| H      | L  | L  | L  | L  | X  | X  | L        | L  | L  | L  |
| L      | H  | H  | H  | H  | X  | X  | H        | H  | H  | H  |
| L      | L  | L  | L  | L  | H  | X  | No Count |    |    |    |
| L      | L  | L  | L  | L  | X  | H  | No Count |    |    |    |
| L      | L  | L  | L  | L  | ** | ** | L        | L  | L  | L  |
| L      | L  | L  | L  | L  | ** | ** | H        | L  | L  | L  |
| L      | L  | L  | L  | L  | ** | ** | L        | H  | L  | L  |
| L      | L  | L  | L  | L  | ** | ** | H        | H  | L  | L  |
| L      | L  | L  | L  | L  | ** | ** | L        | L  | H  | L  |
| L      | L  | L  | L  | L  | ** | ** | H        | L  | H  | L  |
| L      | L  | L  | L  | L  | ** | ** | L        | L  | L  | H  |
| L      | L  | L  | L  | L  | ** | ** | H        | L  | L  | H  |
| L      | L  | L  | L  | L  | ** | ** | L        | H  | L  | H  |
| L      | L  | L  | L  | L  | ** | ** | H        | H  | L  | H  |
| L      | L  | L  | L  | L  | ** | ** | L        | L  | H  | H  |
| L      | L  | L  | L  | L  | ** | ** | H        | L  | H  | H  |
| L      | L  | L  | L  | L  | ** | ** | L        | H  | H  | H  |
| L      | L  | L  | L  | L  | ** | ** | H        | H  | H  | H  |


\*\* Clock transition from  $V_{IL}$  to  $V_{IH}$  may be applied to C1 or C2 or both for same effect.




ON Semiconductor

<http://onsemi.com>

### MARKING DIAGRAMS




CDIP-16  
L SUFFIX  
CASE 620



PDIP-16  
P SUFFIX  
CASE 648




PLCC-20  
FN SUFFIX  
CASE 775



A = Assembly Location  
WL = Wafer Lot  
YY = Year  
WW = Work Week

### DIP PIN ASSIGNMENT

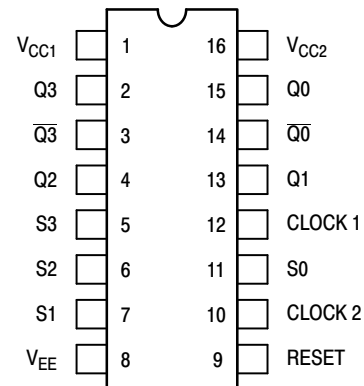

Pin assignment is for Dual-in-Line Package.  
For PLCC pin assignment, see the Pin Conversion Tables on page 18 of the ON Semiconductor MECL Data Book (DL122/D).

### ORDERING INFORMATION

| Device    | Package | Shipping        |
|-----------|---------|-----------------|
| MC10178L  | CDIP-16 | 25 Units / Rail |
| MC10178P  | PDIP-16 | 25 Units / Rail |
| MC10178FN | PLCC-20 | 46 Units / Rail |

# MC10178

## ELECTRICAL CHARACTERISTICS

| Characteristic                     | Symbol      | Pin Under Test | Test Limits |        |        |     |        |        | Unit   |           |     |
|------------------------------------|-------------|----------------|-------------|--------|--------|-----|--------|--------|--------|-----------|-----|
|                                    |             |                | -30°C       |        | +25°C  |     |        | +85°C  |        |           |     |
|                                    |             |                | Min         | Max    | Min    | Typ | Max    | Min    |        | Max       |     |
| Power Supply Drain Current         | $I_E$       | 8              |             | 97     |        |     | 88     |        | 97     | mAdc      |     |
| Input Current                      | $I_{inH}$   | 12             |             | 390    |        |     | 245    |        | 245    | $\mu$ Adc |     |
|                                    |             | 11             |             | 350    |        |     | 220    |        | 220    |           |     |
| 9                                  |             |                | 650         |        |        | 410 |        | 410    |        |           |     |
|                                    | $I_{inL}$   | *              | 0.5         |        | 0.5    |     |        | 0.3    |        | $\mu$ Adc |     |
| Output Voltage Logic 1             | $V_{OH}$    | 14             | -1.060      | -0.890 | -0.960 |     | -0.810 | -0.890 | -0.700 | Vdc       |     |
|                                    |             | 15             | -1.060      | -0.890 | -0.960 |     | -0.810 | -0.890 | -0.700 |           |     |
| Output Voltage Logic 0             | $V_{OL}$    | 14             | -1.890      | -1.675 | -1.850 |     | -1.650 | -1.825 | -1.615 | Vdc       |     |
|                                    |             | 15             | -1.890      | -1.675 | -1.850 |     | -1.650 | -1.825 | -1.615 |           |     |
| Threshold Voltage Logic 1          | $V_{OHA}$   | 3              | -1.080      |        | -0.980 |     |        | -0.910 |        | Vdc       |     |
|                                    |             | 14             | -1.080      |        | -0.980 |     |        | -0.910 |        |           |     |
|                                    |             | 15             | -1.080      |        | -0.980 |     |        | -0.910 |        |           |     |
| Threshold Voltage Logic 0          | $V_{OLA}$   | 3              |             | -1.655 |        |     | -1.630 |        | -1.595 | Vdc       |     |
|                                    |             | 14             |             | -1.655 |        |     | -1.630 |        | -1.595 |           |     |
|                                    |             | 15             |             | -1.655 |        |     | -1.630 |        | -1.595 |           |     |
| Switching Times (50 $\Omega$ Load) |             |                |             |        |        |     |        |        |        | ns        |     |
| Propagation Delay                  | Clock Input | $t_{12+15+}$   | 15          | 1.4    | 5.0    | 1.5 | 3.5    | 4.8    | 1.5    | 5.3       |     |
|                                    |             | $t_{12-13-}$   | 13          | 1.9    | 9.4    | 2.0 | 6.0    | 9.2    | 2.0    | 9.8       |     |
|                                    |             | $t_{12+4-}$    | 4           | 2.9    | 12.3   | 3.0 | 8.5    | 12.0   | 3.0    | 12.8      |     |
|                                    |             | $t_{12-3+}$    | 3           | 3.9    | 14.9   | 4.0 | 11.0   | 14.5   | 4.0    | 15.5      |     |
| Rise Time (20 to 80%)              |             | $t_{15+}$      | 15          | 1.1    | 4.7    | 1.1 | 2.5    | 4.5    | 1.1    | 5.0       |     |
| Fall Time (20 to 80%)              |             | $t_{15-}$      | 15          | 1.1    | 4.7    | 1.1 | 2.5    | 4.5    | 1.1    | 5.0       |     |
| Set Input                          |             | $t_{11-15+}$   | 15          | 1.4    | 5.2    | 1.5 |        | 5.0    | 1.5    | 5.5       |     |
| Reset Input                        |             | $t_{9-15+}$    | 15          | 1.4    | 5.2    | 1.5 |        | 5.0    | 1.5    | 5.5       |     |
| Counting Frequency                 |             | $f_{count}$    | 15          | 125    |        | 125 | 150    |        | 125    |           | MHz |

\* Individually test each input applying  $V_{IL}$  to input under test.

# MC10178

## ELECTRICAL CHARACTERISTICS (continued)

|                            |                     |                     | TEST VOLTAGE VALUES (Volts)               |                    |                     |                     |                 |                           |        |       |
|----------------------------|---------------------|---------------------|---|--------------------|---------------------|---------------------|-----------------|---------------------------|--------|-------|
|                            |                     |                     | V <sub>IHmax</sub>                        | V <sub>ILmin</sub> | V <sub>IHAmin</sub> | V <sub>ILAmax</sub> | V <sub>EE</sub> |                           |        |       |
| @ Test Temperature         |                     |                     |   |                    |                     |                     |                 |                           |        |       |
|                            |                     |                     | -30°C                                     |                    |                     |                     |                 |                           |        |       |
|                            |                     |                     | +25°C                                     |                    |                     |                     |                 |                           |        |       |
|                            |                     |                     | +85°C                                     |                    |                     |                     |                 |                           |        |       |
| Characteristic             | Symbol              | Pin Under Test      | TEST VOLTAGE APPLIED TO PINS LISTED BELOW |                    |                     |                     |                 | (V <sub>CC</sub> )<br>Gnd |        |       |
|                            |                     |                     | V <sub>IHmax</sub>                        | V <sub>ILmin</sub> | V <sub>IHAmin</sub> | V <sub>ILAmax</sub> | V <sub>EE</sub> |                           |        |       |
| Power Supply Drain Current | I <sub>E</sub>      | 8                   | 9   |                    |                     |                     | 8               | 1, 16                     |        |       |
| Input Current              | I <sub>inH</sub>    | 12                  | 12  |                    |                     |                     | 8               | 1, 16                     |        |       |
|                            |                     | 11                  | 11  |                    |                     |                     | 8               | 1, 16                     |        |       |
| 9                          |                     | 9                   |   |                    |                     | 8                   | 1, 16           |                           |        |       |
| Output Voltage             | Logic 1             | V <sub>OH</sub>     | 14  | 9                  |                     |                     |                 | 8                         | 1, 16  |       |
|                            |                     |                     | 15  | 11                 |                     |                     |                 | 8                         | 1, 16  |       |
| Output Voltage             | Logic 0             | V <sub>OL</sub>     | 14  | 11                 |                     |                     |                 | 8                         | 1, 16  |       |
|                            |                     |                     | 15  | 9                  |                     |                     |                 | 8                         | 1, 16  |       |
| Threshold Voltage          | Logic 1             | V <sub>OHA</sub>    | 3   |                    |                     | 5                   |                 | 8                         | 1, 16  |       |
|                            |                     |                     | 14  |                    |                     | 11                  |                 | 8                         | 1, 16  |       |
|                            |                     |                     | 15  |                    |                     | 9                   |                 | 8                         | 1, 16  |       |
| Threshold Voltage          | Logic 0             | V <sub>OLA</sub>    | 3   |                    |                     | 5                   |                 | 8                         | 1, 16  |       |
|                            |                     |                     | 14  |                    |                     | 11                  |                 | 8                         | 1, 16  |       |
|                            |                     |                     | 15  |                    |                     | 9                   |                 | 8                         | 1, 16  |       |
| Switching Times (50Ω Load) |                     |                     |   |                    |                     |                     |                 |                           |        |       |
| Propagation Delay          | Data Input          | t <sub>12+15+</sub> | 15  |                    |                     | Pulse In            | Pulse Out       | -3.2 V                    | +2.0 V |       |
|                            |                     |                     | t <sub>12-13-</sub>                       | 13                 |                     |                     | 12              | 15                        | 8      | 1, 16 |
|                            |                     |                     | t <sub>12+4-</sub>                        | 4                  |                     |                     | 12              | 13                        | 8      | 1, 16 |
|                            |                     |                     | t <sub>12-3+</sub>                        | 3                  |                     |                     | 12              | 4                         | 8      | 1, 16 |
|                            |                     |                     | t <sub>12-3+</sub>                        | 3                  |                     |                     | 12              | 3                         | 8      | 1, 16 |
| Rise Time (20 to 80%)      | t <sub>+</sub>      | 15                  |   |                    | 12                  | 15                  | 8               | 1, 16                     |        |       |
| Fall Time (20 to 80%)      | t <sub>-</sub>      | 15                  |   |                    | 12                  | 15                  | 8               | 1, 16                     |        |       |
| Set Input                  | t <sub>11-15+</sub> | 15                  |   |                    | 11                  | 15                  | 8               | 1, 16                     |        |       |
| Reset Input                | t <sub>9-15+</sub>  | 15                  |   |                    | 9                   | 15                  | 8               | 1, 16                     |        |       |
| Counting Frequency         | f <sub>count</sub>  | 15                  |   |                    | 12                  | 15                  | 8               | 1, 16                     |        |       |


\* Individually test each input applying V<sub>IL</sub> to input under test.

Each MECL 10,000 series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50-ohm resistor to -2.0 volts. Test procedures are shown for only one gate. The other gates are tested in the same manner.

# MC10178

## PACKAGE DIMENSIONS

PLCC-20  
FN SUFFIX  
PLASTIC PLCC PACKAGE  
CASE 775-02  
ISSUE C

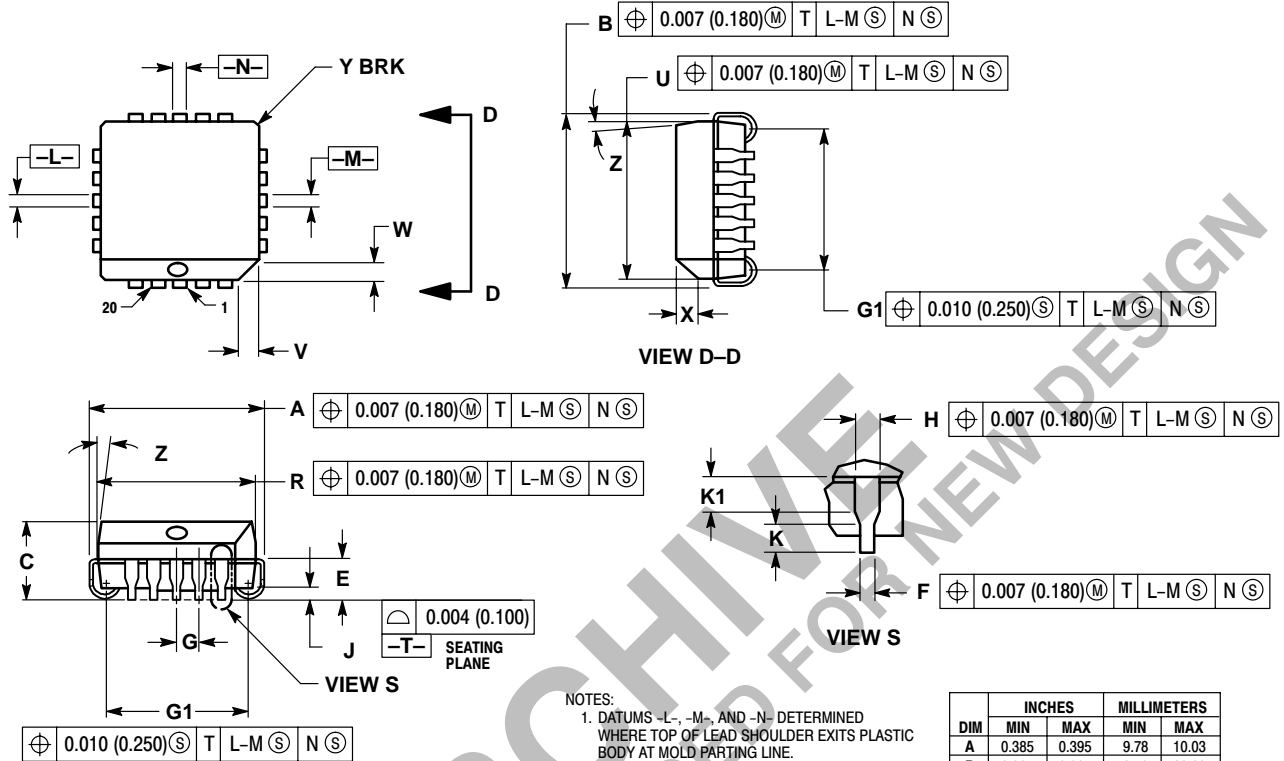

### NOTES:

- DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
- DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
- DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.385     | 0.395 | 9.78        | 10.03 |
| B   | 0.385     | 0.395 | 9.78        | 10.03 |
| C   | 0.165     | 0.180 | 4.20        | 4.57  |
| E   | 0.090     | 0.110 | 2.29        | 2.79  |
| F   | 0.013     | 0.019 | 0.33        | 0.48  |
| G   | 0.050 BSC |       | 1.27 BSC    |       |
| H   | 0.026     | 0.032 | 0.66        | 0.81  |
| J   | 0.020     | ---   | 0.51        | ---   |
| K   | 0.025     | ---   | 0.64        | ---   |
| R   | 0.350     | 0.356 | 8.89        | 9.04  |
| U   | 0.350     | 0.356 | 8.89        | 9.04  |
| V   | 0.042     | 0.048 | 1.07        | 1.21  |
| W   | 0.042     | 0.048 | 1.07        | 1.21  |
| X   | 0.042     | 0.056 | 1.07        | 1.42  |
| Y   | ---       | 0.020 | ---         | 0.50  |
| Z   | 2°        | 10°   | 2°          | 10°   |
| G1  | 0.310     | 0.330 | 7.88        | 8.38  |
| K1  | 0.040     | ---   | 1.02        | ---   |

# MC10178

## PACKAGE DIMENSIONS

### CDIP-16 L SUFFIX CERAMIC DIP PACKAGE CASE 620-10 ISSUE T



- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
  4. DIMENSION F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.750     | 0.785 | 19.05       | 19.93 |
| B   | 0.240     | 0.295 | 6.10        | 7.49  |
| C   | ---       | 0.200 | ---         | 5.08  |
| D   | 0.015     | 0.020 | 0.39        | 0.50  |
| E   | 0.050 BSC |       | 1.27 BSC    |       |
| F   | 0.055     | 0.065 | 1.40        | 1.65  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.008     | 0.015 | 0.21        | 0.38  |
| K   | 0.125     | 0.170 | 3.18        | 4.31  |
| L   | 0.300 BSC |       | 7.62 BSC    |       |
| M   | 0°        | 15°   | 0°          | 15°   |
| N   | 0.020     | 0.040 | 0.51        | 1.01  |

### PDIP-16 P SUFFIX PLASTIC DIP PACKAGE CASE 648-08 ISSUE R



- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
  4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
  5. ROUNDED CORNERS OPTIONAL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.740     | 0.770 | 18.80       | 19.55 |
| B   | 0.250     | 0.270 | 6.35        | 6.85  |
| C   | 0.145     | 0.175 | 3.69        | 4.44  |
| D   | 0.015     | 0.021 | 0.39        | 0.53  |
| F   | 0.040     | 0.70  | 1.02        | 1.77  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.050 BSC |       | 1.27 BSC    |       |
| J   | 0.008     | 0.015 | 0.21        | 0.38  |
| K   | 0.110     | 0.130 | 2.80        | 3.30  |
| L   | 0.295     | 0.305 | 7.50        | 7.74  |
| M   | 0°        | 10°   | 0°          | 10°   |
| S   | 0.020     | 0.040 | 0.51        | 1.01  |

ARCHIVE FOR NEW DESIGN  
DEVICE NOT RECOMMENDED


**Notes**

**ARCHIVE**  
DEVICE NOT RECOMMENDED FOR NEW DESIGN

Notes

ARCHIVE  
DEVICE NOT RECOMMENDED FOR NEW DESIGN

ARCHIVE  
RECOMMENDED FOR NEW DESIGN

**ON Semiconductor** and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

## PUBLICATION ORDERING INFORMATION

### Literature Fulfillment:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** ONlit@hibbertco.com

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**JAPAN:** ON Semiconductor, Japan Customer Focus Center  
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-0031  
**Phone:** 81-3-5740-2700  
**Email:** r14525@onsemi.com

**ON Semiconductor Website:** <http://onsemi.com>

For additional information, please contact your local Sales Representative.