

## Features

- Single Output up to 25A  
Dual Outputs Total Power up to 100W
- Input/Output 1.6kVDC Isolation
- Adjustable Output Voltage
- Under-Voltage Lockout
- No Minimum Load
- Industry Standard Footprint
- Fixed Operating Frequency
- Halt Tested
- Compact 61.0 x 57.91 x 12.7mm Package
- High Efficiency to 90%

## Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (A)	Line Regulation (mV)	Load Regulation (mV)	Input Current <sup>(8)</sup> (A)	Efficiency <sup>(9)</sup> %
<b>Single Output</b>							
RP100-481.8S	36 – 75	1.8	25	4	6	1157	86
RP100-482.5S	36 – 75	2.5	25	5	8	1608	87
RP100-483.3S	36 – 75	3.3	25	7	10	2022	90
RP100-4805S	36 – 75	5	20	10	15	2480	90
RP100-4815S	36 – 75	15	6.66	30	45	2507	90

Part Number	Input Voltage (VDC)	Output Voltage V1 / V2 (VDC)	Output Current I1 / I2 (A)	Line Regulation V1 / V2 (mV)	Load Regulation V1 / V2 (mV)	Input Current <sup>(8)</sup> (A)	Efficiency <sup>(9)</sup> %
<b>Dual Output</b>							
RP100-483.305DI	36 – 75	5 / 3.3	20 / 25	25 / 16.5	25 / 16.5	2.39	87
RP100-482.505DI	36 – 75	5 / 2.5	20 / 25	25 / 12.5	25 / 12.5	2.45	85
RP100-482.53.3DI	36 – 75	3.3 / 2.5	25 / 25	16.5 / 12.5	16.5 / 12.5	2.44	85


## Notes:

1. Maximum output deviation is 10% inclusive of remote sense. If remote sense is not being used, the +Vsense should be connected to its corresponding +Vout and likewise the -Vsense should be connected to its corresponding -Vout.
2. Single: Measured with a 1 $\mu$ F M/C and a 10 $\mu$ F T/C.  
Dual: For each outputs.
3. An external filter capacitor is required for normal operation.  
The capacitor should be capable of handling 1A ripple current for 48V models.  
RECOM suggest: Nippon chemi-con KMF series, 220 $\mu$ F/100V, ESR 90m $\Omega$ .
4. Single: The negative / positive logic and length are optional ( see table ).  
The pin voltage is referenced to negative input.  
Dual: The ON/OFF control function. There are positive logic ( standard ) and negative logic ( option ).  
The pin voltage is referenced to negative input.  
To order negative logic ON/OFF control add the suffix-N. ( Ex:RP100-483.305I/N )
5. BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C.  
( Ground fixed and controlled environment )
6. Heat sink is optional and P/N: 7G-0021, 7G-0022, 7G-0023, 7G-0024.
7. The RP100 meets level A and level B conducted emissions only with external components connected before the input pin to the converter.
8. Maximum value at nominal input voltage and full load.
9. Typical value at nominal input voltage and full load.  
The dual efficiency test condition: RP100-483.305DI @ 5V/12A and 3.3V/12A  
RP100-482.505DI @ 5V/12A and 2.5V/16A  
RP100-482.53.3DI @ 3.3V/18A and 2.5V/16A
10. BASEPLATE GROUNDING: Base-plate should be grounded at one of four screw bolts prior to operation.
11. The converter is provided by basic insulation.
12. "N" for Negative remote ON/OFF.
13. "P" for Positive remote ON/OFF.

**INNOLINE**  
DC/DC-Converter

# RP100-S\_DI Series

**100 Watt  
Isolated  
Single &  
Dual Output**



**RECOM**

**Specifications (refer to the standard application circuit, Ta: 25°C)**

Input Voltage Range	36-75VDC	48V nom.
Over-Voltage Lockout Start-up Voltage	Dual	76.5V typ.
Over-Voltage Lockout Shutdown Voltage	Dual	78.5V typ.
Unde-Voltage Lockout Start-up Voltage	Single	34V typ.
	Dual	35V typ.
Unde-Voltage Lockout Shutdown Voltage	Single	32V typ.
	Dual	33V typ.
Input Filter (Note 3)		L-C type
Input voltage variation	dv/dt	5V/ms max (Complies with ETS300 132 part4.4)
Input Surge Voltage 100ms max	Single	100VDC
Start up time	Nominal Vin and constant resistive load	Single 25ms typ.
Input Reflected-Ripple Current (5Hz to 20Hz, 12µH Source inpedance)	Single	20mA <sub>p-p</sub>
Remote ON/OFF (Note 4)		
Single (Positive logic)	ON=Open or 3.0V < Vr < 15V, OFF=Short or 0V < Vr < 1.2V,	I <sub>IN</sub> =50µA max. I <sub>IN</sub> =1mA max.
Single (Negative logic)	ON=Short or 0V < Vr < 1.2V, OFF=Open or 3.0V < Vr < 15V,	I <sub>IN</sub> =1mA max. I <sub>IN</sub> =50µA max.
Dual (Positive logic)	ON=Open or 3.0V < Vr < +Vin, OFF=Short or Vr < 1.2V,	
Dual (Negative logic)	ON=Short or 3.0V < Vr < +Vin, OFF=Open or Vr < 1.2V.	
Continuous Output Power		100W max.
Output Voltage Accuracy (full load and nominal Vin)	Single	±1.5%
	Dual	±1.0%
Output Voltage Adjustment (Note 1)	Single	+10%, -20%
	Dual	±10%
Minimum Load		0%
Line Regulation	low line to high line at full load	See table
Load Regulation	Single 0% to 100%full load Dual 0% to 100% full load Dual for each Outputs	See table
Remote Sense (Note 1)		10% of Vout
Ripple and Noise 20MHz bandwidth (Note 2)		100mV <sub>p-p</sub>
Temperature Coefficient		±0.02%/°C
Transient Response Recovery Time (25% load step change)		200µs
Over Voltage Protection threshold (Hiccup)	Single & Dual	115% ~ 130% of Vout
	2.5V	3.0V
	3.3V	3.9V
	5V	6.2V
Over Current Protection threshold		110% ~ 140% of Iout Rated
Short Circuit Protection		Hiccup, Automatic recovery
Efficiency (at nominal input voltage, full load)		up to 90%


Continued next page

**Specifications (refer to the standard application circuit, Ta: 25°C)**


Isolation Voltage	Input to Output	1600VDC min.
	Input to Case	1000VDC min.
	Output to Case	1000VDC min.
Isolation Resistance	Single	10 MΩ min.
	Dual	10 GΩ min.
Isolation Capacitance	Single	2500pF max.
	Dual	1500pF max.
Operating Frequency		300KHz typ.
Operating Base-plate Temperature Range ( Note 6 )		-40°C to +100°C
Over Temperature Protection	Single	110°C
	Dual for Base-plate	105°C
Storage Temperature Range		-55°C to +125°C
Humidity max., Non-condensing		95%
Thermal Shock		MIL-STD-810D
Vibration	10 ~ 55Hz 2G, 3minutes period, 30minutes analog	X, Y and Z
Conducted Emissions	EN55022 (Note 7)	Level A
	EN55022 (Note 7)	Level B
Radiated Emissions	EN55022	Level A
ESD	EN61000-4-2	Perf. Criteria2
Radiated Immunity	EN61000-4-3	Perf. Criteria2
Fast Transient	EN61000-4-4	Perf. Criteria2
Surge	EN61000-4-5	Perf. Criteria2
Conducted Immunity	EN61000-4-6	Perf. Criteria2
Case Material	Dual	Non-conductive black plastic
Base material		Aluminum base-plate
Potting material	Dual	Silicon (UL94-V0)
Weight	Single	55g
	Dual	105g
MTBF ( Note 6 )	Single	2000 x 10 <sup>3</sup> hours
	Dual	1004 x 10 <sup>3</sup> hours

**Characteristics**


## Efficiency vs Output Load

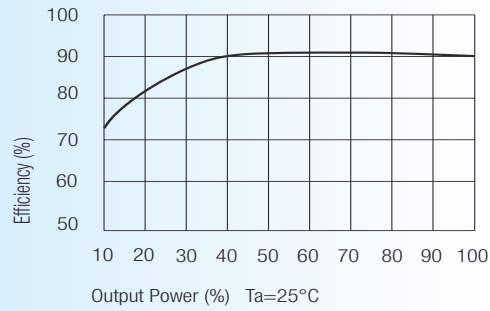

## 48V Input Without Heatsink



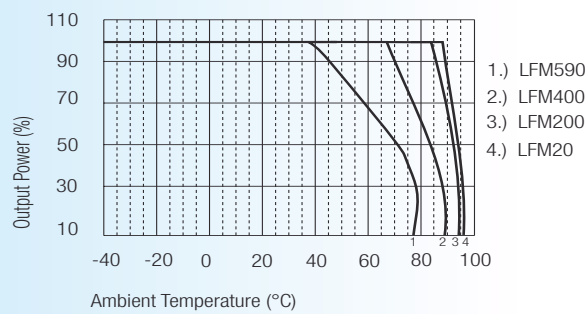


## 48V Input With Heatsink (7G-0022)

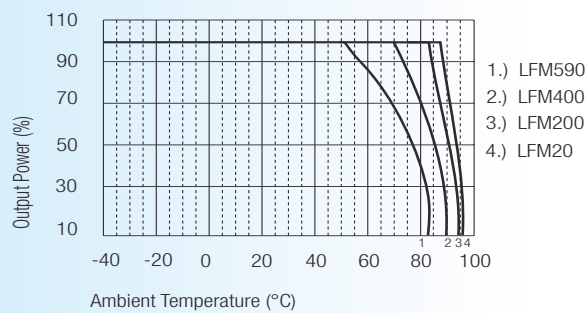

Package Style and Pinning (mm)

## Single Output

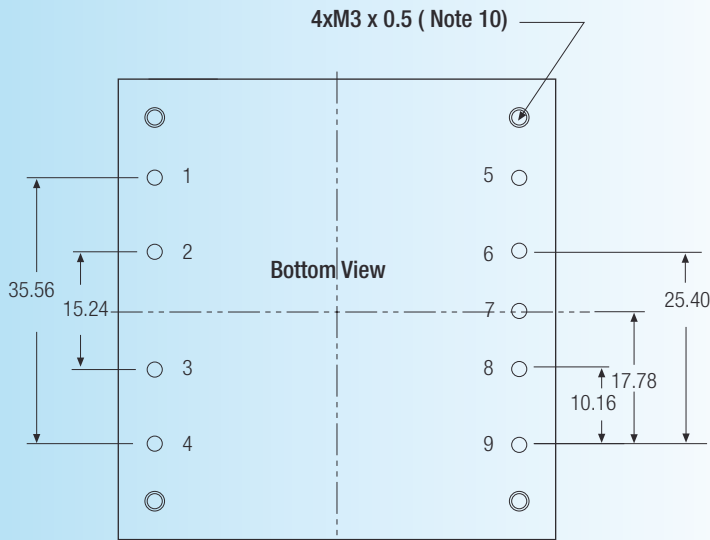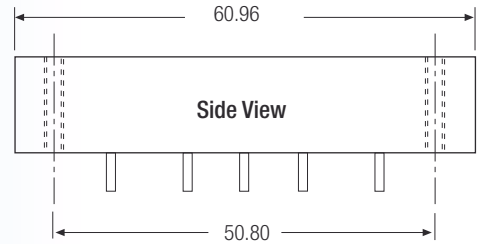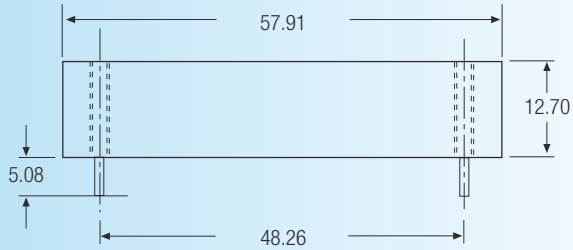


**Pin Connections**

Pin #	Function	Pin Ø
1	-Vin	1.016 mm
2	Case	1.016 mm
3	Remote ON/OFF	1.016 mm
4	+Vin	1.016 mm
5	-Vout	2.032 mm
6	-Vsense	1.016 mm
7	Trim	1.016 mm
8	+Vsense	1.016 mm
9	+Vout	2.032 mm

XX.X ± 0.5 mm  
XX.XX ± 0.25 mm  
Pin pitch tolerance 0.35mm

## External Output Trimming

Output can be externally trimmed by using the method shown below.

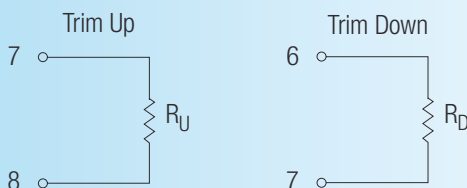

## Product Options Table




Option	Suffix
Negative remote ON/OFF logic, 0.20" pin length (standard)	
Negative remote ON/OFF logic, 0.145" pin length	L
Negative remote ON/OFF logic, 0.11" pin length	K
Positive remote ON/OFF logic, 0.20" pin length	P
Positive remote ON/OFF logic, 0.145" pin length	S
Positive remote ON/OFF logic, 0.11" pin length	M

Example: RP100-483.3S/P

**Package Style and Pinning (mm)**

## Dual Output

3rd angle projection 

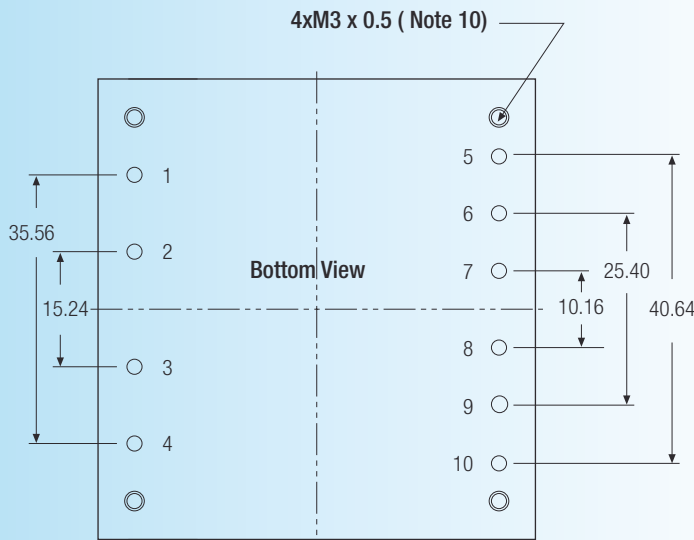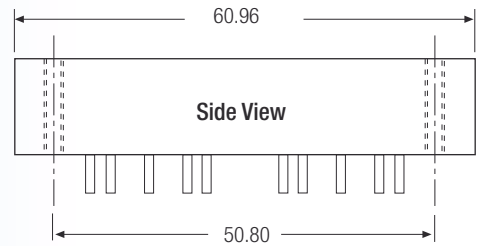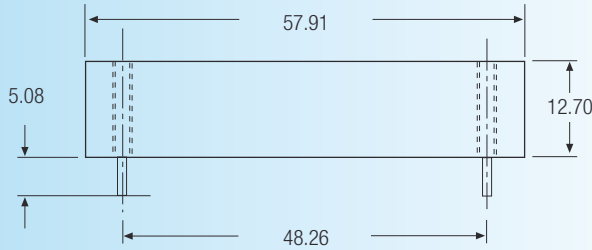

**Pin Connections**


Pin #	Function	Pin Ø
1	-Vin	1.016 mm
2	Case	1.016 mm
3	Remote ON/OFF	1.016 mm
4	+Vin	1.016 mm
5	+V2	2.032 mm
6	-V2 (Com)	2.032 mm
7	V2 Trim	1.016 mm
8	+V1	2.032 mm
9	+V1 (Com)	2.032 mm
10	V1 Trim	1.016 mm

XX.X ± 0.5 mm  
XX.XX ± 0.25 mm  
Pin pitch tolerance 0.35mm

## External Output Trimming

Output can be externally trimmed by using the method shown below.

( ) for V2 output trim

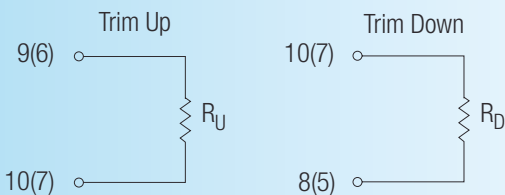

## Product Options Table

Option	Suffix
Negative remote ON/OFF logic, 0.20" pin length (standard)	
Negative remote ON/OFF logic, 0.145" pin length	L
Negative remote ON/OFF logic, 0.11" pin length	K
Positive remote ON/OFF logic, 0.20" pin length	P
Positive remote ON/OFF logic, 0.145" pin length	S
Positive remote ON/OFF logic, 0.11" pin length	M

Example: RP100-483.305I/N