

June 1994

## Monolithic Quad SPST CMOS Analog Switches

### Features

- This Circuit is Processed in Accordance to MIL-STD-883 and is Fully Conformant Under the Provisions of Paragraph 1.2.1.
- ON-Resistance 85Ω Max
- Low Power Consumption ( $P_D < 1.6\text{mW}$ )
- Fast Switching Action
  - $t_{ON} < 250\text{ns}$
  - $t_{OFF} < 120\text{ns}$  (DG441/883)
- Low Charge Injection
- Upgrade from DG201A/883/DG202/883
- TTL, CMOS Compatible
- Single or Split Supply Operation

### Applications

- Audio Switching
- Battery Operated Systems
- Data Acquisition
- Hi-Rel Systems
- Sample and Hold Circuits
- Communication Systems
- Automatic Test Equipment

### Description

The DG441/883 and DG442/883 monolithic CMOS analog switches are drop-in replacements for the popular DG201A/883 and DG202/883 series devices. They include four independent single pole single throw (SPST) analog switches, TTL and CMOS compatible digital inputs, and a voltage reference for logic thresholds.

These switches feature lower analog ON resistance ( $< 85\Omega$ ) and faster switch time ( $t_{ON} < 250\text{ns}$ ) compared to the DG201A/883 and DG202/883. Charge injection has been reduced, simplifying sample and hold applications.


The improvements in the DG441/883 series are made possible by using a high voltage silicon-gate process. An epitaxial layer prevents the latch-up associated with older CMOS technologies. The 44V maximum voltage range permits controlling 40V peak-to-peak signals. Power supplies may be single-ended from +5V to +34V, or split from  $\pm 5\text{V}$  to  $\pm 20\text{V}$ .

The four switches are bilateral, equally matched for AC or bidirectional signals. The ON resistance variation with analog signals is quite low over a  $\pm 5\text{V}$  analog input range. The switches in the DG441/883 and DG442/883 are identical, differing only in the polarity of the selection logic.


### Ordering Information

| PART NUMBER | TEMPERATURE RANGE | PACKAGE        |
|-------------|-------------------|----------------|
| DG441AK/883 | -55°C to +125°C   | 16 Lead CerDIP |
| DG442AK/883 | -55°C to +125°C   | 16 Lead CerDIP |

### Pinout

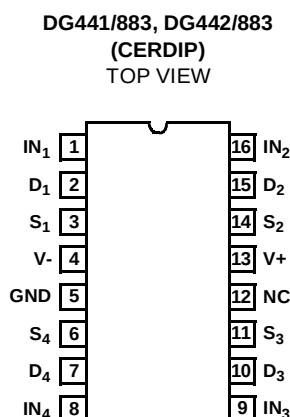

### Functional Diagrams

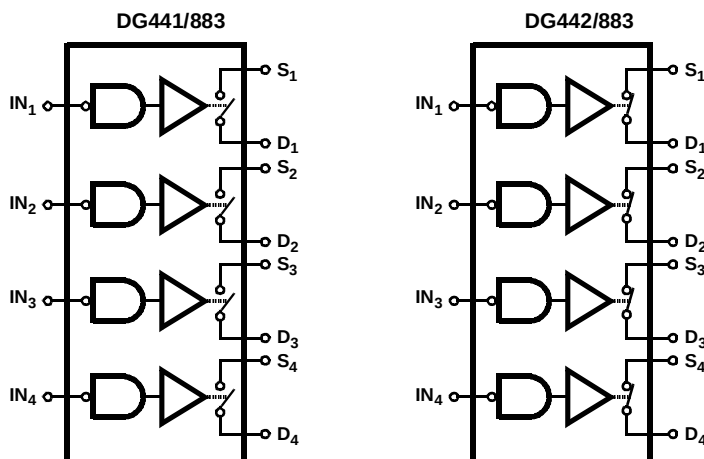

SWITCHES SHOWN FOR LOGIC "1" INPUT

### Pin Description

| PIN | SYMBOL          | DESCRIPTION                                |
|-----|-----------------|--------------------------------------------|
| 1   | IN <sub>1</sub> | Logic Control for Switch 1                 |
| 2   | D <sub>1</sub>  | Drain (Output) Terminal for Switch 1       |
| 3   | S <sub>1</sub>  | Source (Input) Terminal for switch 1       |
| 4   | V-              | Negative Power Supply Terminal             |
| 5   | GND             | Ground Terminal (Logic Common)             |
| 6   | S <sub>4</sub>  | Source (Input) Terminal for Switch 4       |
| 7   | D <sub>4</sub>  | Drain (Output) Terminal for Switch 4       |
| 8   | IN <sub>4</sub> | Logic Control for Switch 4                 |
| 9   | IN <sub>3</sub> | Logic Control for Switch 3                 |
| 10  | D <sub>3</sub>  | Drain (Output) Terminal for Switch 3       |
| 11  | S <sub>3</sub>  | Source (Input) Terminal for Switch 3       |
| 12  | NC              | No Internal Connection                     |
| 13  | V+              | Positive Power Supply Terminal (Substrate) |
| 14  | S <sub>2</sub>  | Source (Input) Terminal for Switch 2       |
| 15  | D <sub>2</sub>  | Drain (Output) Terminal for Switch 2       |
| 16  | IN <sub>2</sub> | Logic Control for Switch 2                 |

### TRUTH TABLE

| LOGIC | V <sub>IN</sub> | DG441 | DG442 |
|-------|-----------------|-------|-------|
| 0     | ≤0.8V           | ON    | OFF   |
| 1     | ≥2.4V           | OFF   | ON    |

### Specifications DG441/883, DG442/883

### Absolute Maximum Ratings

|                                                |                                                          |
|------------------------------------------------|----------------------------------------------------------|
| V+ to V- . . . . .                             | 44V                                                      |
| GND to V- . . . . .                            | 25V                                                      |
| Digital Inputs, (Note 1) . . . . .             | (V-) -2V to (V+) + 2V or 30mA,<br>Whichever Occurs First |
| Continuous Current, S or D (Note 1). . . . .   | $\pm 30\text{mA}$                                        |
| Peak Current, S or D (Note 1) . . . . .        | $\pm 100\text{mA}$                                       |
| Storage Temperature Range (A Suffix) . . . . . | -65°C to +150°C                                          |
| Lead Temperature (Soldering 10s). . . . .      | +300°C                                                   |

## Thermal Information

|                                        |               |               |
|----------------------------------------|---------------|---------------|
| Thermal Resistance (Max, Note 3)       | $\theta_{JA}$ | $\theta_{JC}$ |
| CerDIP Package .....                   | 85°C/W        | 25°C/W        |
| Junction Temperature .....             |               | +175°C        |
| Operating Temperature (A Suffix) ..... | -55°C to      | +125°C        |

**CAUTION:** Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

## Operating Conditions

|                             |                 |                          |          |
|-----------------------------|-----------------|--------------------------|----------|
| Operating Voltage Range     | ±20V Max        | Input High Voltage       | 2.4V Min |
| Operating Temperature Range | -55°C to +125°C | Input Rise and Fall Time | 20ns     |
| Input Low Voltage           | 0.8V Max        |                          |          |

**TABLE 1. DC ELECTRICAL PERFORMANCE CHARACTERISTICS**

Device Tested at:  $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ ,  $V_+ = +15\text{V}$ ,  $V_- = -15\text{V}$ , Unless Otherwise Specified

| PARAMETERS                                                                                        | SYMBOL              | CONDITIONS             |                                                                                     | GROUP A<br>SUBGROUP | TEMPERATURE   | LIMITS |     | UNITS |
|---------------------------------------------------------------------------------------------------|---------------------|------------------------|-------------------------------------------------------------------------------------|---------------------|---------------|--------|-----|-------|
| Drain-to-Source ON Resistance<br><br>DG441/883<br><br>DG442/883<br><br>DG441/883<br><br>DG442/883 | R <sub>DS(ON)</sub> | V <sub>IN</sub> = 0.8V | V+ = +13.5V,<br>V- = -13.5V,<br>I <sub>S</sub> = -10mA,<br>V <sub>D</sub> = ±8.5V   | 1, 3                | +25°C, -55°C  | -      | 85  | Ω     |
|                                                                                                   |                     |                        |                                                                                     | 2                   | +125°C        | -      | 100 | Ω     |
|                                                                                                   |                     | V <sub>IN</sub> = 2.4V | V+ = +13.5V,<br>V- = -13.5V,<br>I <sub>S</sub> = -10mA,<br>V <sub>D</sub> = ±8.5V   | 1, 3                | +25°C, -55°C  | -      | 85  | Ω     |
|                                                                                                   |                     |                        |                                                                                     | 2                   | +125°C        | -      | 100 | Ω     |
|                                                                                                   |                     | V <sub>IN</sub> = 0.8V | V+ = +10.8V,<br>V- = 0V,<br>I <sub>S</sub> = -10mA,<br>V <sub>D</sub> = 3.0V        | 1, 3                | +25°C, -55°C  | -      | 160 | Ω     |
|                                                                                                   |                     |                        |                                                                                     | 2                   | +125°C        | -      | 200 | Ω     |
|                                                                                                   |                     |                        | V+ = +10.8V,<br>V- = 0V,<br>I <sub>S</sub> = -10mA,<br>V <sub>D</sub> = 8.0V        | 1, 3                | +25°C, -55°C  | -      | 160 | Ω     |
|                                                                                                   |                     |                        |                                                                                     | 2                   | +125°C        | -      | 200 | Ω     |
|                                                                                                   |                     | V <sub>IN</sub> = 2.4V | V+ = +10.8V,<br>V- = 0V,<br>I <sub>S</sub> = -10mA,<br>V <sub>D</sub> = 3.0V        | 1, 3                | +25°C, -55°C  | -      | 160 | Ω     |
|                                                                                                   |                     |                        |                                                                                     | 2                   | +125°C        | -      | 200 | Ω     |
|                                                                                                   |                     |                        | V+ = +10.8V,<br>V- = 0V,<br>I <sub>S</sub> = -10mA,<br>V <sub>D</sub> = 8.0V        | 1, 3                | +25°C, -55°C  | -      | 160 | Ω     |
|                                                                                                   |                     |                        |                                                                                     | 2                   | +125°C        | -      | 200 | Ω     |
| Source OFF Leakage Current<br><br>DG441/883<br><br>DG442/883                                      | I <sub>S(OFF)</sub> | V <sub>IN</sub> = 2.4V | V+ = +16.5V,<br>V- = -16.5V,<br>V <sub>S</sub> = ∓15.5V,<br>V <sub>D</sub> = ±15.5V | 1                   | +25°C         | -0.5   | 0.5 | nA    |
|                                                                                                   |                     |                        |                                                                                     | 2, 3                | +125°C, -55°C | -20    | 20  | nA    |
|                                                                                                   |                     | V <sub>IN</sub> = 0.8V | V+ = +16.5V,<br>V- = -16.5V,<br>V <sub>S</sub> = ∓15.5V,<br>V <sub>D</sub> = ±15.5V | 1                   | +25°C         | -0.5   | 0.5 | nA    |
|                                                                                                   |                     |                        |                                                                                     | 2, 3                | +125°C, -55°C | -20    | 20  | nA    |

## Specifications DG441/883, DG442/883

**TABLE 1. DC ELECTRICAL PERFORMANCE CHARACTERISTICS (Continued)**

Device Tested at:  $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ ,  $V_+ = +15\text{V}$ ,  $V_- = -15\text{V}$ , Unless Otherwise Specified

| PARAMETERS                                               | SYMBOL                                     | CONDITIONS                                              |                                                                                               | GROUP A<br>SUBGROUP      | TEMPERATURE              | LIMITS |     | UNITS |
|----------------------------------------------------------|--------------------------------------------|---------------------------------------------------------|-----------------------------------------------------------------------------------------------|--------------------------|--------------------------|--------|-----|-------|
| Drain OFF Leakage Current<br>DG441/883<br><br>DG442/883  | I <sub>D(OFF)</sub>                        | V <sub>IN</sub> = 2.4V                                  | V+ = +16.5V,<br>V- = -16.5V,<br>V <sub>S</sub> = $\mp$ 15.5V,<br>V <sub>D</sub> = $\pm$ 15.5V | 1                        | +25°C                    | -0.5   | 0.5 | nA    |
|                                                          |                                            |                                                         |                                                                                               | 2, 3                     | +125°C, -55°C            | -20    | 20  | nA    |
|                                                          |                                            | V <sub>IN</sub> = 0.8V                                  | V+ = +16.5V,<br>V- = -16.5V,<br>V <sub>S</sub> = $\mp$ 15.5V,<br>V <sub>D</sub> = $\pm$ 15.5V | 1                        | +25°C                    | -0.5   | 0.5 | nA    |
|                                                          |                                            |                                                         |                                                                                               | 2, 3                     | +125°C, -55°C            | -20    | 20  | nA    |
| Channel ON Leakage Current<br>DG441/883<br><br>DG442/883 | I <sub>D(ON)</sub> +<br>I <sub>S(ON)</sub> | V <sub>IN</sub> = 0.8V                                  | V+ = +16.5V,<br>V- = -16.5V,<br>V <sub>S</sub> = V <sub>D</sub> = $\pm$ 15.5V                 | 1                        | +25°C                    | -0.5   | 0.5 | nA    |
|                                                          |                                            |                                                         |                                                                                               | 2, 3                     | +125°C, -55°C            | -40    | 40  | nA    |
|                                                          |                                            | V <sub>IN</sub> = 2.4V                                  | V+ = +16.5V,<br>V- = -16.5V,<br>V <sub>S</sub> = V <sub>D</sub> = $\pm$ 15.5V                 | 1                        | +25°C                    | -0.5   | 0.5 | nA    |
|                                                          |                                            |                                                         |                                                                                               | 2, 3                     | +125°C, -55°C            | -40    | 40  | nA    |
| Input Current with V <sub>IN</sub> Low                   | I <sub>IL</sub>                            | V <sub>IN</sub> Under Test = 0.8V,<br>All Others = 2.4V |                                                                                               | 1, 2, 3                  | +25°C, +125°C, -<br>55°C | -0.5   | 0.5 | μA    |
| Input Current with V <sub>IN</sub> High                  | I <sub>IH</sub>                            | V <sub>IN</sub> Under Test = 2.4V,<br>All Others = 0.8V |                                                                                               | 1, 2, 3                  | +25°C, +125°C, -<br>55°C | -0.5   | 0.5 | μA    |
| Positive Supply Current                                  | I+                                         | V+ = 16.5V, V- = -16.5V, V <sub>IN</sub> = 0V           |                                                                                               | 1, 2, 3                  | +25°C, +125°C, -<br>55°C | -      | 0.1 | mA    |
|                                                          |                                            | V+ = 16.5V, V- = -16.5V, V <sub>IN</sub> = 5V           |                                                                                               |                          |                          | -      | 0.1 | mA    |
|                                                          |                                            | V+ = 13.2V, V- = 0V, V <sub>IN</sub> = 0V               |                                                                                               |                          |                          | -      | 0.1 | mA    |
|                                                          |                                            | V+ = 13.2V, V- = 0V, V <sub>IN</sub> = 5V               |                                                                                               |                          |                          | -      | 0.1 | mA    |
| Negative Supply Current                                  | I-                                         | V+ = 16.5V, V- = -16.5V, V <sub>IN</sub> = 0V           |                                                                                               | 1, 3                     | +25°C, -55°C             | -1.0   | -   | μA    |
|                                                          |                                            |                                                         |                                                                                               | 2                        | +125°C                   | -100   | -   | μA    |
|                                                          |                                            | V+ = 16.5V, V- = -16.5V, V <sub>IN</sub> = 5V           |                                                                                               | 1, 3                     | +25°C, -55°C             | -1.0   | -   | μA    |
|                                                          |                                            |                                                         |                                                                                               | 2                        | +125°C                   | -100   | -   | μA    |
|                                                          |                                            | V+ = 13.2V, V- = 0V, V <sub>IN</sub> = 0V               |                                                                                               | 1, 3                     | +25°C, -55°C             | -1.0   | -   | μA    |
|                                                          |                                            |                                                         |                                                                                               | 2                        | +125°C                   | -100   | -   | μA    |
|                                                          |                                            | V+ = 13.2V, V- = 0V, V <sub>IN</sub> = 5V               |                                                                                               | 1, 3                     | +25°C, -55°C             | -1.0   | -   | μA    |
|                                                          |                                            |                                                         |                                                                                               | 2                        | +125°C                   | -100   | -   | μA    |
| Ground Current                                           | I <sub>GND</sub>                           | V+ = 16.5V, V- = -16.5V, V <sub>IN</sub> = 0V           | 1, 2, 3                                                                                       | +25°C, +125°C, -<br>55°C | -100                     | -      | μA  |       |
|                                                          |                                            | V+ = 16.5V, V- = -16.5V, V <sub>IN</sub> = 5V           |                                                                                               |                          | -100                     | -      | μA  |       |
|                                                          |                                            | V+ = 13.2V, V- = 0V, V <sub>IN</sub> = 0V               |                                                                                               |                          | -100                     | -      | μA  |       |
|                                                          |                                            | V+ = 13.2V, V- = 0V, V <sub>IN</sub> = 5V               |                                                                                               |                          | -100                     | -      | μA  |       |

## Specifications DG441/883, DG442/883

**TABLE 2. AC ELECTRICAL PERFORMANCE CHARACTERISTICS**

Device Tested at:  $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ ,  $V_+ = +15\text{V}$ ,  $V_- = -15\text{V}$ , Unless Otherwise Specified

| PARAMETERS    | SYMBOL           | CONDITIONS                                                                                                      | GROUP A<br>SUBGROUP | TEMPERATURE                                                               | LIMITS |     | UNITS |
|---------------|------------------|-----------------------------------------------------------------------------------------------------------------|---------------------|---------------------------------------------------------------------------|--------|-----|-------|
|               |                  |                                                                                                                 |                     |                                                                           | MIN    | MAX |       |
| Turn ON Time  | $t_{\text{ON}}$  | $C_L = 35\text{pF}$ , $V_S = \pm 10\text{V}$ ,<br>$R_L = 1\text{k}\Omega$                                       | 9                   | $+25^{\circ}\text{C}$                                                     | -      | 250 | ns    |
| DG441         |                  |                                                                                                                 |                     |                                                                           | -      | 315 | ns    |
| DG442         |                  | $C_L = 35\text{pF}$ , $V_S = \pm 10\text{V}$ ,<br>$R_L = 1\text{k}\Omega$                                       | 10, 11              | $+125^{\circ}\text{C}$ , $-55^{\circ}\text{C}$                            | -      | 300 | ns    |
| DG441         |                  |                                                                                                                 |                     |                                                                           | -      | 400 | ns    |
| DG442         |                  | $V_+ = 12\text{V}$ , $V_- = 0\text{V}$ ,<br>$C_L = 35\text{pF}$ , $V_S = 8.0\text{V}$ , $R_L = 1\text{k}\Omega$ | 9                   | $+25^{\circ}\text{C}$                                                     | -      | 400 | ns    |
| DG441         |                  |                                                                                                                 |                     |                                                                           | -      | 450 | ns    |
| DG442         |                  | $V_+ = 12\text{V}$ , $V_- = 0\text{V}$ ,<br>$C_L = 35\text{pF}$ , $V_S = 8.0\text{V}$ , $R_L = 1\text{k}\Omega$ | 10, 11              | $+125^{\circ}\text{C}$ , $-55^{\circ}\text{C}$                            | -      | 600 | ns    |
| DG441         |                  |                                                                                                                 |                     |                                                                           | -      | 675 | ns    |
| Turn OFF Time | $t_{\text{OFF}}$ | $C_L = 35\text{pF}$ , $V_S = \pm 10\text{V}$ ,<br>$R_L = 1\text{k}\Omega$                                       | 9                   | $+25^{\circ}\text{C}$                                                     | -      | 120 | ns    |
| DG441         |                  |                                                                                                                 |                     |                                                                           | -      | 210 | ns    |
| DG442         |                  | $C_L = 35\text{pF}$ , $V_S = \pm 10\text{V}$ ,<br>$R_L = 1\text{k}\Omega$                                       | 10, 11              | $+125^{\circ}\text{C}$ , $-55^{\circ}\text{C}$                            | -      | 150 | ns    |
| DG441         |                  |                                                                                                                 |                     |                                                                           | -      | 250 | ns    |
| DG442         |                  | $V_+ = 12\text{V}$ , $V_- = 0\text{V}$ ,<br>$C_L = 35\text{pF}$ , $V_S = 8.0\text{V}$ , $R_L = 1\text{k}\Omega$ | 9, 10, 11           | $+25^{\circ}\text{C}$ , $+125^{\circ}\text{C}$ ,<br>$-55^{\circ}\text{C}$ | -      | 200 | ns    |
| DG441, DG442  |                  |                                                                                                                 |                     |                                                                           | -      | 200 | ns    |

**NOTES:**

1. All leads soldered to PC Board.
2. Room:  $+25^{\circ}\text{C}$ . Cold: A suffix  $-55^{\circ}\text{C}$ , D suffix  $-40^{\circ}\text{C}$ . Hot: A suffix  $+125^{\circ}\text{C}$ , D suffix  $+85^{\circ}\text{C}$ .
3. Dissipation rating assumes device is mounted with all leads soldered to printed circuit board.
4. Typical values are for DESIGN AID ONLY, not guaranteed nor production tested.

**TABLE 3. ELECTRICAL PERFORMANCE CHARACTERISTICS**

Table 3 Intentionally Left Blank.

**TABLE 4. ELECTRICAL TEST REQUIREMENTS**

| MIL-STD-883 TEST REQUIREMENTS               | SUBGROUPS (SEE TABLES 1 AND 2) |
|---------------------------------------------|--------------------------------|
| Interim Electrical Parameters (Pre Burn-In) | 1                              |
| Final Electrical Test Parameters            | 1 (Note 1), 2, 3, 9, 10, 11    |
| Group A Test Requirements                   | 1, 2, 3, 9, 10, 11             |
| Groups C and D Endpoints                    | 1                              |

**NOTE:**

1. PDA applies to Subgroup 1 only.

## Die Characteristics

### DIE DIMENSIONS:

2760 $\mu$ m x 1780 $\mu$ m x 485  $\pm$  25 $\mu$ m

### METALLIZATION:

Type: SiAl

Thickness: 12k $\text{\AA}$   $\pm$  1k $\text{\AA}$

### GLASSIVATION:


Type: Nitride

Thickness: 8k $\text{\AA}$   $\pm$  1k $\text{\AA}$

### WORST CASE CURRENT DENSITY:


1.5 x 10<sup>5</sup>A/cm<sup>2</sup>

## Metallization Mask Layout

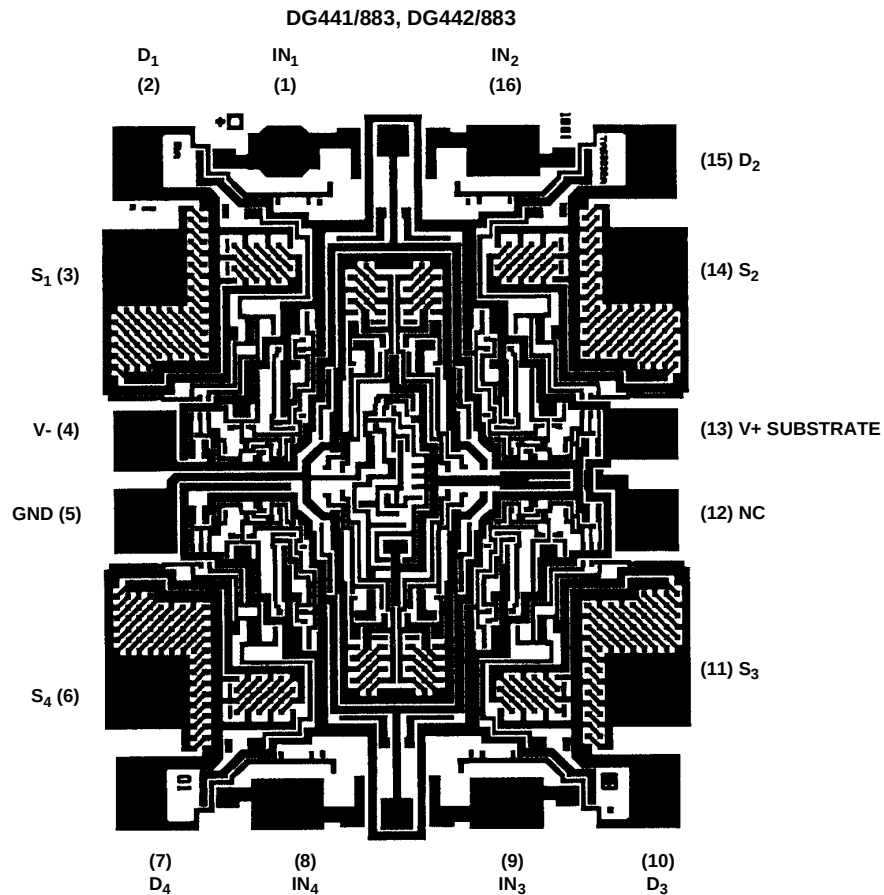


## Test Circuits

$V_O$  is the steady state output with the switch on. Feedthrough via switch capacitance may result in spikes at the leading and trailing edge of the output waveform.

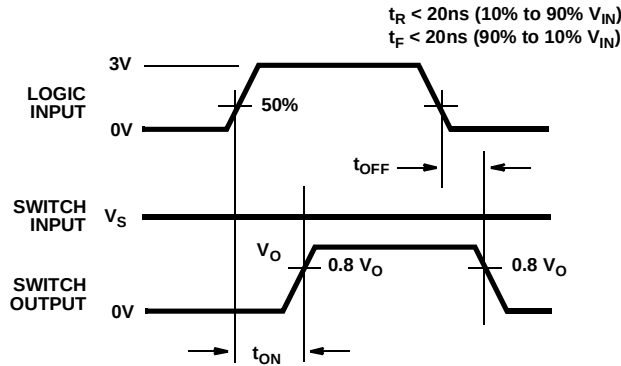

NOTE: Logic input waveform is inverted for switches that have the opposite logic sense.

FIGURE 1A.

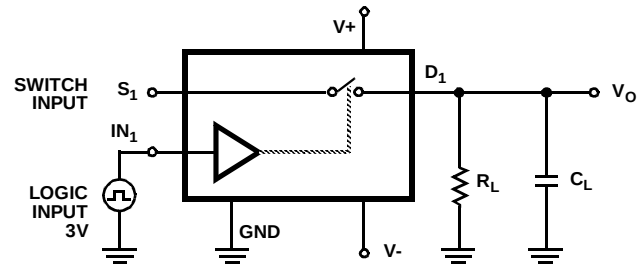

Repeat test for Channels 2, 3 and 4.


For load conditions, see Specifications  $C_L$  (includes fixture and stray capacitance)

$$V_O = V_S \frac{R_L}{R_L + r_{DS(ON)}}$$


FIGURE 1B.

FIGURE 1. SWITCHING TIME

## Burn-In Circuit

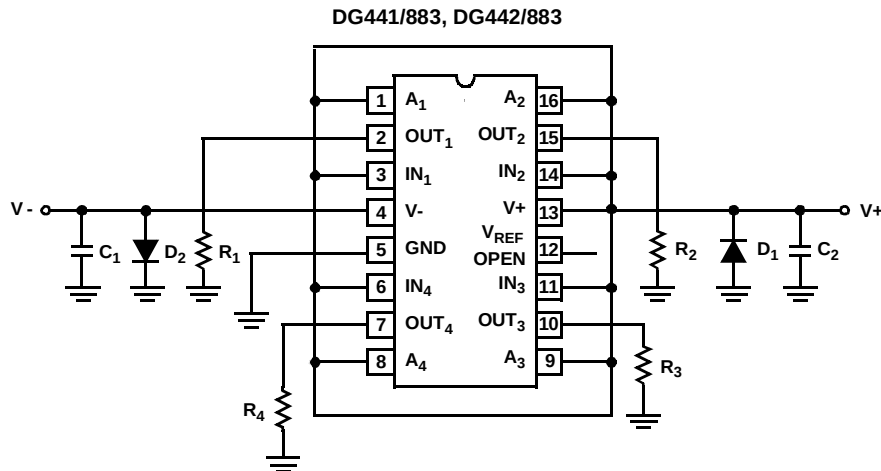

# **Schematic Diagram (One Channel)**

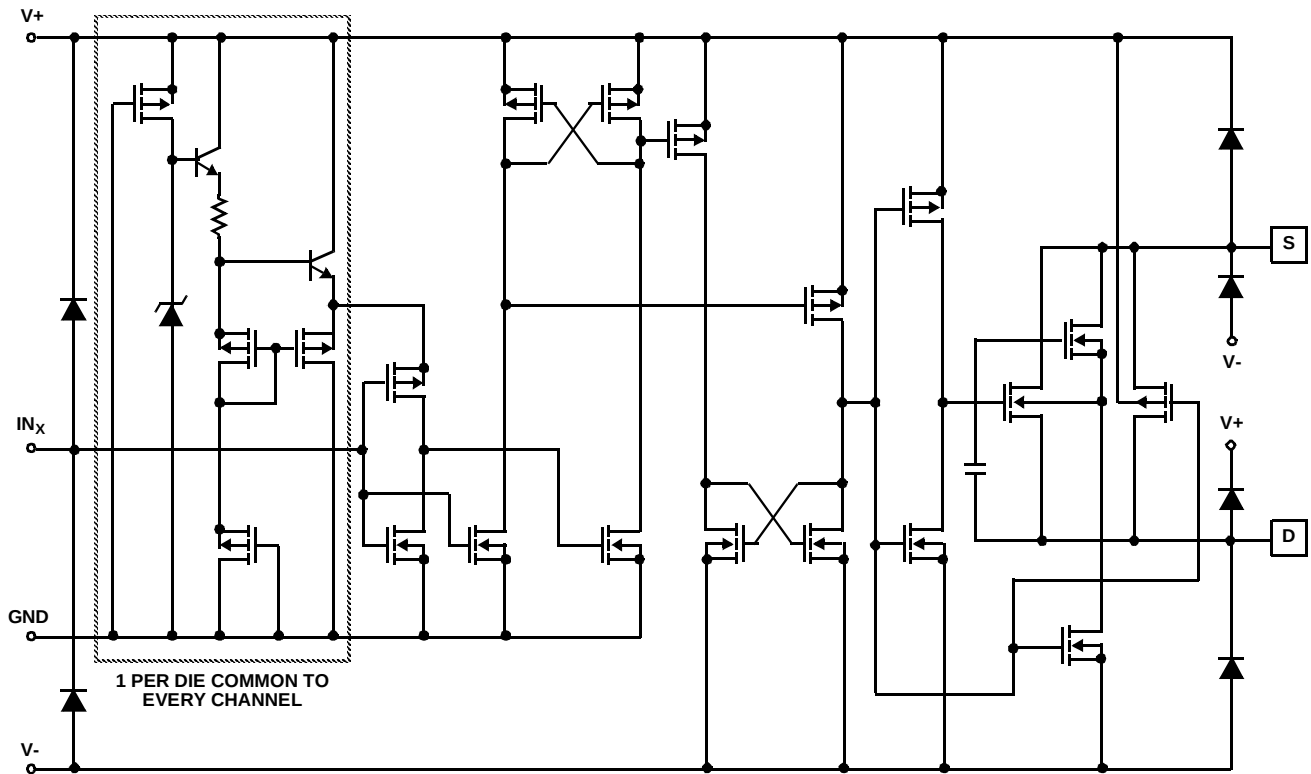


All Intersil semiconductor products are manufactured, assembled and tested under **ISO9000** quality systems certification.

*Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

For information regarding Intersil Corporation and its products, see web site <http://www.intersil.com>

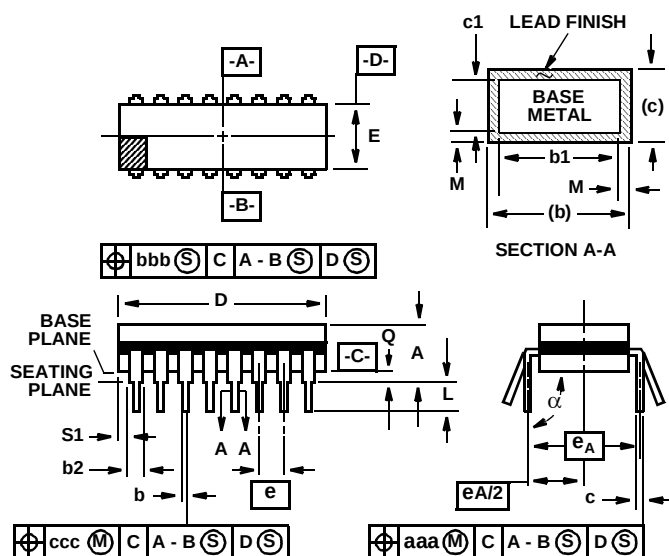

**Ceramic Dual-In-Line Frit Seal Packages (CerDIP)****NOTES:**

1. Index area: A notch or a pin one identification mark shall be located adjacent to pin one and shall be located within the shaded area shown. The manufacturer's identification shall not be used as a pin one identification mark.
2. The maximum limits of lead dimensions b and c or M shall be measured at the centroid of the finished lead surfaces, when solder dip or tin plate lead finish is applied.
3. Dimensions b1 and c1 apply to lead base metal only. Dimension M applies to lead plating and finish thickness.
4. Corner leads (1, N, N/2, and N/2+1) may be configured with a partial lead paddle. For this configuration dimension b3 replaces dimension b2.
5. This dimension allows for off-center lid, meniscus, and glass overrun.
6. Dimension Q shall be measured from the seating plane to the base plane.
7. Measure dimension S1 at all four corners.
8. N is the maximum number of terminal positions.
9. Dimensioning and tolerancing per ANSI Y14.5M - 1982.
10. Controlling dimension: INCH.

**F16.3 MIL-STD-1835 GDIP1-T16 (D-2, CONFIGURATION A)  
16 LEAD CERAMIC DUAL-IN-LINE FRIT SEAL PACKAGE**

| SYMBOL   | INCHES    |        | MILLIMETERS |       | NOTES |
|----------|-----------|--------|-------------|-------|-------|
|          | MIN       | MAX    | MIN         | MAX   |       |
| A        | -         | 0.200  | -           | 5.08  | -     |
| b        | 0.014     | 0.026  | 0.36        | 0.66  | 2     |
| b1       | 0.014     | 0.023  | 0.36        | 0.58  | 3     |
| b2       | 0.045     | 0.065  | 1.14        | 1.65  | -     |
| b3       | 0.023     | 0.045  | 0.58        | 1.14  | 4     |
| c        | 0.008     | 0.018  | 0.20        | 0.46  | 2     |
| c1       | 0.008     | 0.015  | 0.20        | 0.38  | 3     |
| D        | -         | 0.840  | -           | 21.34 | 5     |
| E        | 0.220     | 0.310  | 5.59        | 7.87  | 5     |
| e        | 0.100 BSC |        | 2.54 BSC    |       | -     |
| eA       | 0.300 BSC |        | 7.62 BSC    |       | -     |
| eA/2     | 0.150 BSC |        | 3.81 BSC    |       | -     |
| L        | 0.125     | 0.200  | 3.18        | 5.08  | -     |
| Q        | 0.015     | 0.060  | 0.38        | 1.52  | 6     |
| S1       | 0.005     | -      | 0.13        | -     | 7     |
| $\alpha$ | 90°       | 105°   | 90°         | 105°  | -     |
| aaa      | -         | 0.015  | -           | 0.38  | -     |
| bbb      | -         | 0.030  | -           | 0.76  | -     |
| ccc      | -         | 0.010  | -           | 0.25  | -     |
| M        | -         | 0.0015 | -           | 0.038 | 2, 3  |
| N        | 16        |        | 16          |       | 8     |

Rev. 0 4/94







## DESIGN INFORMATION

June 1994

## Monolithic Quad SPST CMOS Analog Switches

The information contained in this section has been developed through characterization by Intersil Corporation and is for use as application and design information only. No guarantee is implied.

### Typical Performance Curves

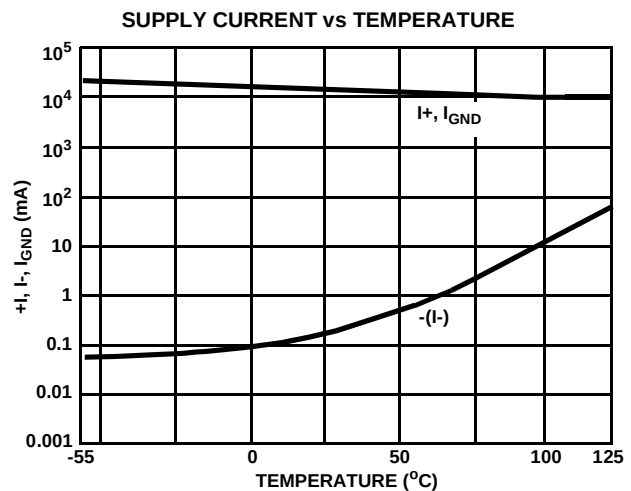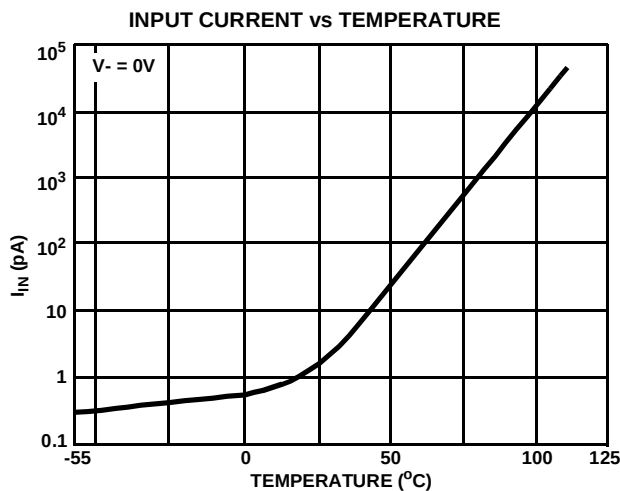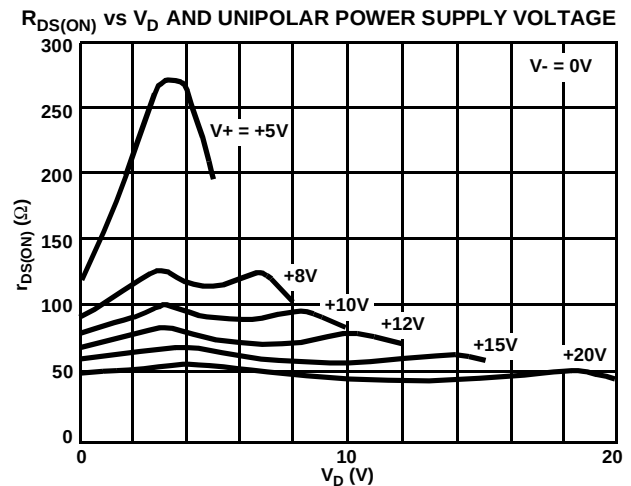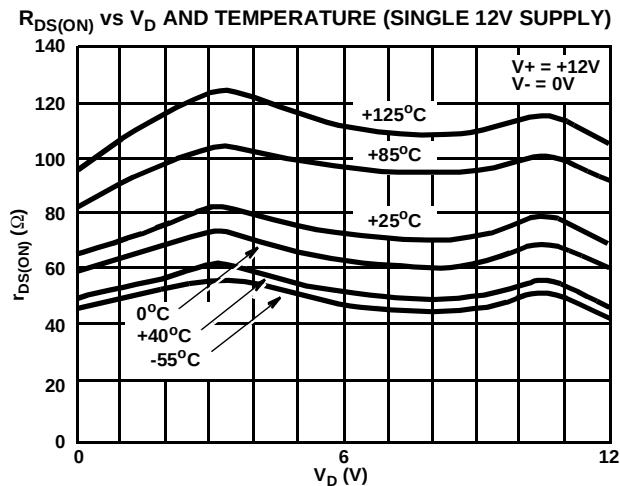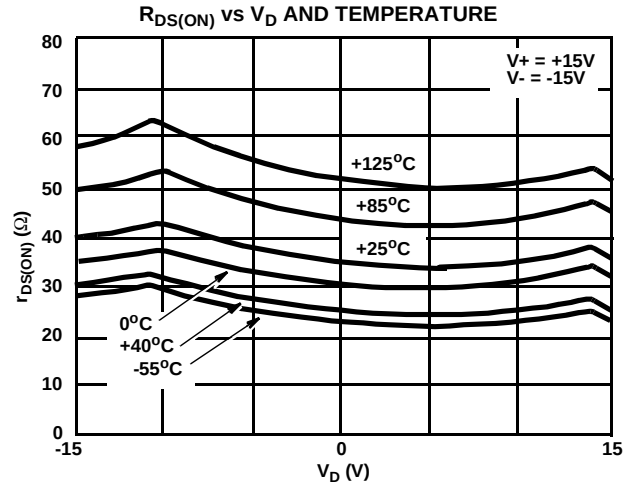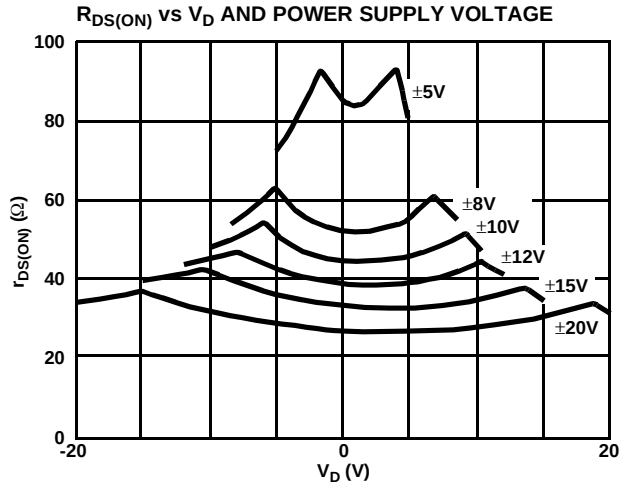


## DESIGN INFORMATION (Continued)


The information contained in this section has been developed through characterization by Intersil Corporation and is for use as application and design information only. No guarantee is implied.

### Typical Performance Curves (Continued)


CROSSTALK AND OFF ISOLATION vs FREQUENCY

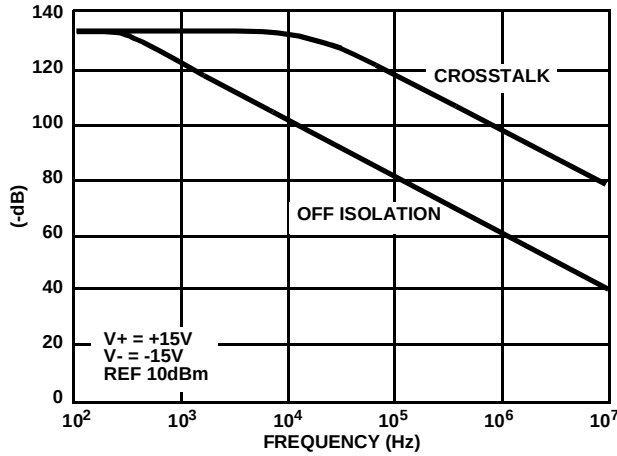


CHARGE INJECTION vs SOURCE VOLTAGE

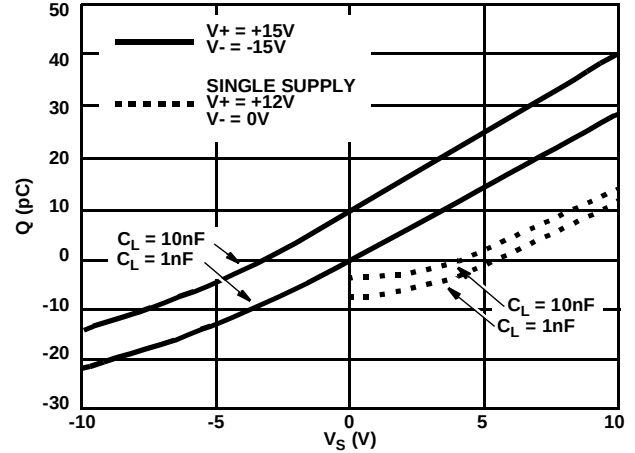


SWITCHING TIMES vs INPUT VOLTAGE

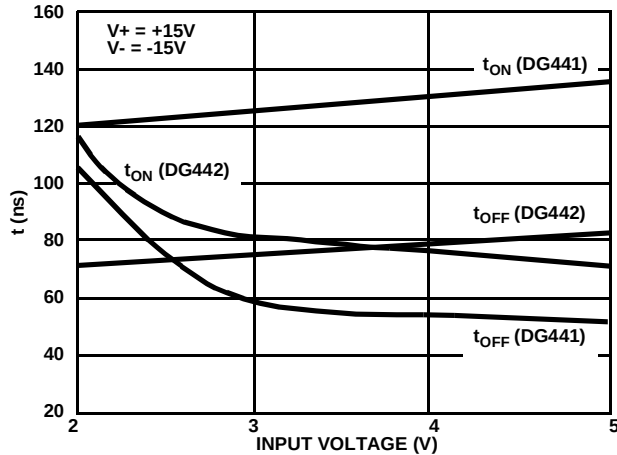


SOURCE/DRAIN LEAKAGE CURRENTS

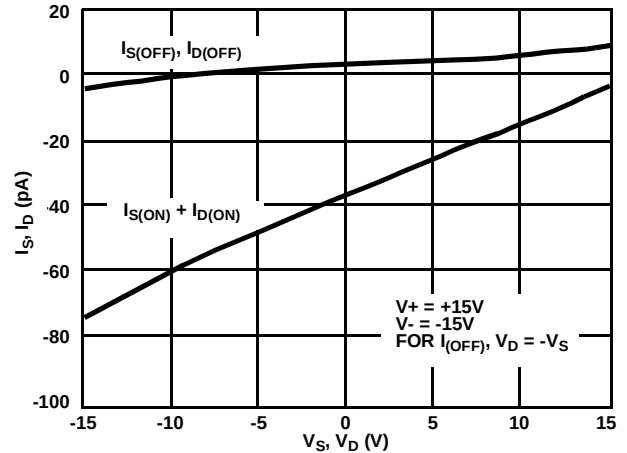

SWITCHING THRESHOLD vs SUPPLY VOLTAGE

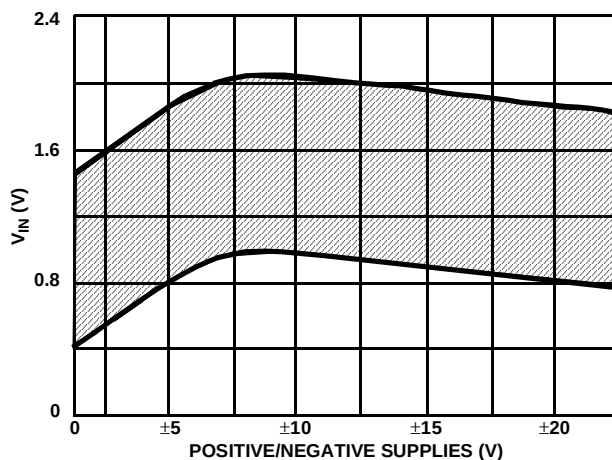

SOURCE/DRAIN CAPACITANCE vs ANALOG VOLTAGE

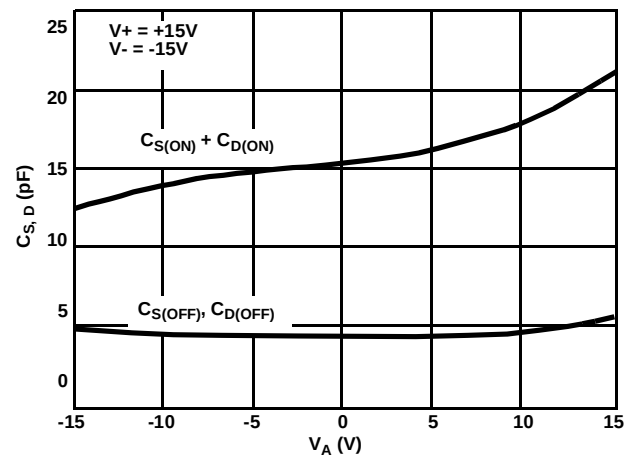


## DESIGN INFORMATION (Continued)


The information contained in this section has been developed through characterization by Intersil Corporation and is for use as application and design information only. No guarantee is implied.

### Typical Performance Curves (Continued)


SOURCE/DRAIN CAPACITANCE vs ANALOG VOLTAGE  
(SINGLE 12V SUPPLY)

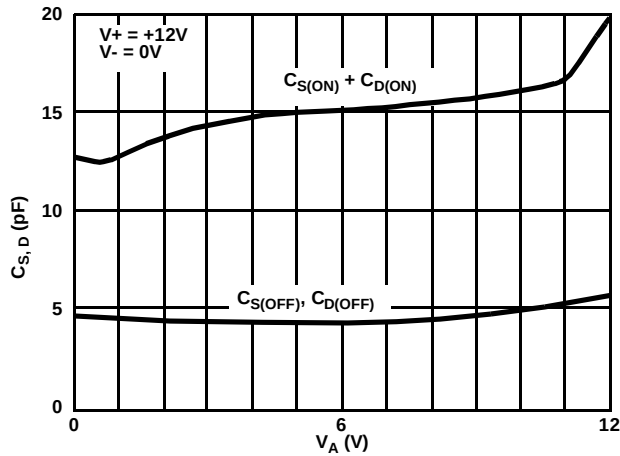


SOURCE/DRAIN LEAKAGE CURRENTS (SINGLE 12V SUPPLY)

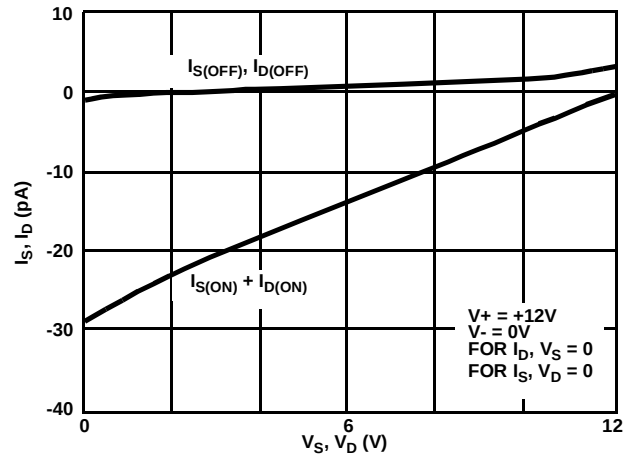

SWITCHING TIME vs POWER SUPPLY VOLTAGE (DG441)

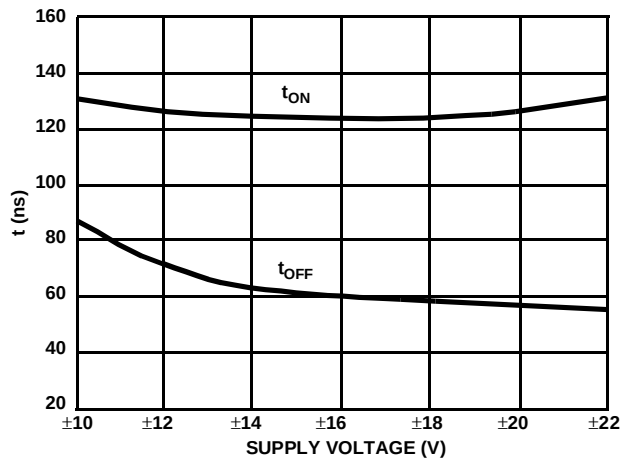

SWITCHING TIMES vs INPUT VOLTAGE

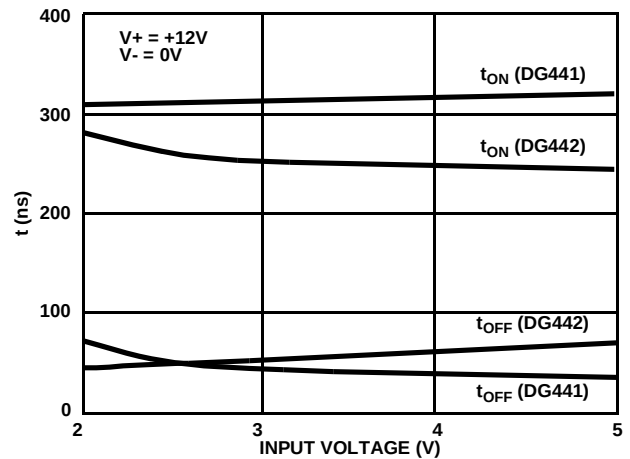

SWITCHING TIME vs POWER SUPPLY VOLTAGE (DG441)

