

Variable Capacitance Diode

Description

The 1T387 is a variable capacitance diode designed for electronic tuning of BS and CS tuners using a super miniature package (SMVC).

Features


- Super miniature package
- Low series resistance: 1.5Ω Max. ($f = 470\text{MHz}$)
- Large capacitance ratio: 14.6 Typ. (C_1/C_{25})
- Small leakage current: 10nA Max. ($V_R = 25\text{V}$)
- Capacitance deviation in a matching group: within 6%

Applications

Electronic tuning of BS and CS tuners

Structure

Silicon epitaxial planar type diode

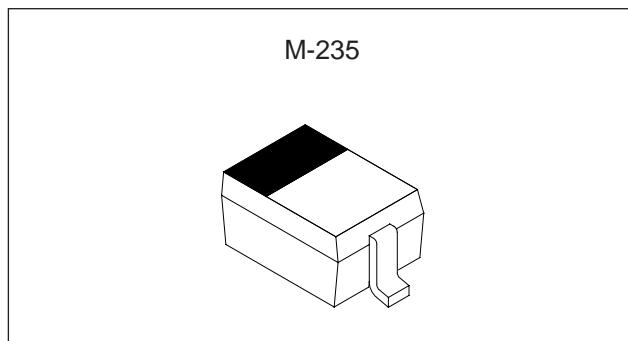

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)





| | | | |
|-------------------------|-----------|-------------------------------|----|
| • Reverse voltage | V_R | 30 | V |
| • Peak reverse voltage | V_{RM} | 35 | V |
| | | $(R_L \geq 10\text{k}\Omega)$ | |
| • Operating temperature | T_{opr} | -20 to +75 | °C |
| • Storage temperature | T_{stg} | -65 to +150 | °C |




Electrical Characteristics

($T_a = 25^\circ\text{C}$)

| Item | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---|--------------|---|------|------|------|------|
| Reverse voltage | V_R | $I_R = 1\mu\text{A}$ | 30.0 | | | V |
| Reverse current | I_R | $V_R = 25\text{V}$ | | | 10.0 | nA |
| Diode capacitance | C_1 | $V_R = 1\text{V}, f = 1\text{MHz}$ | 7.84 | | 9.44 | pF |
| | C_{25} | $V_R = 25\text{V}, f = 1\text{MHz}$ | 0.54 | | 0.64 | pF |
| Capacitance ratio | C_1/C_{25} | | 12.2 | 14.6 | | |
| Series resistance | r_s | $V_R = 5\text{V}, f = 470\text{MHz}$ | | 1.30 | 1.50 | Ω |
| Capacitance deviation in a matching group | ΔC | $V_R = 1 \text{ to } 25\text{V}, f = 1\text{MHz}$ | | | 6.0 | % |

Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.

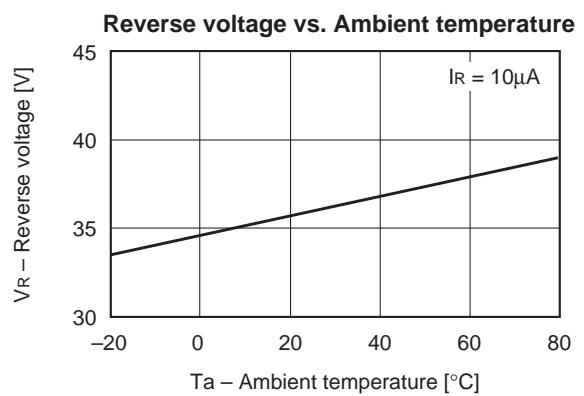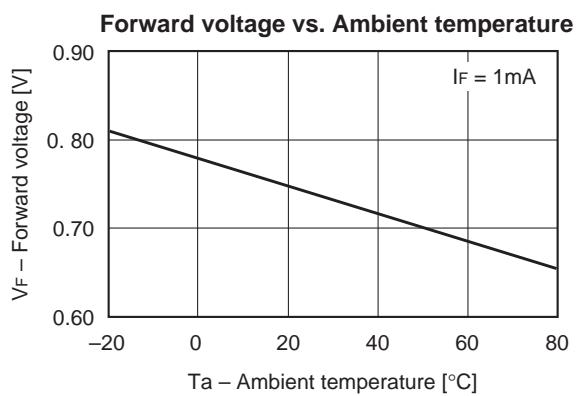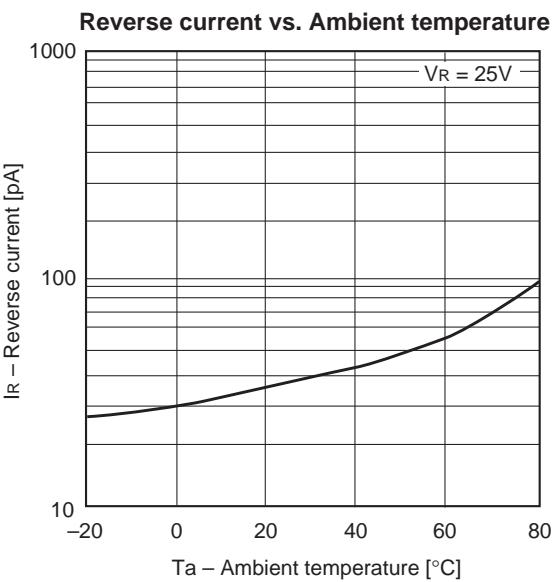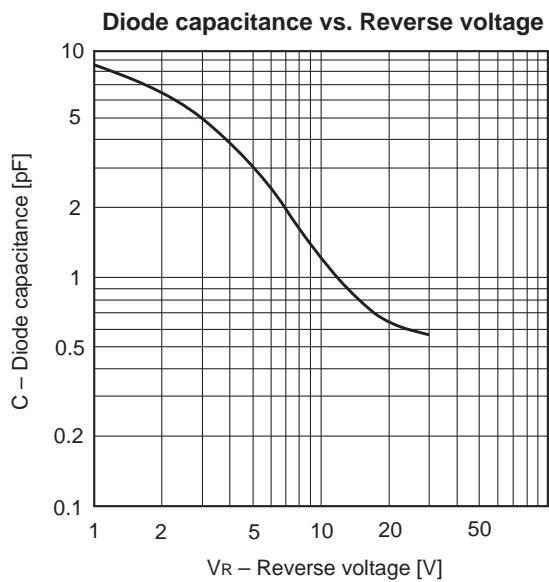


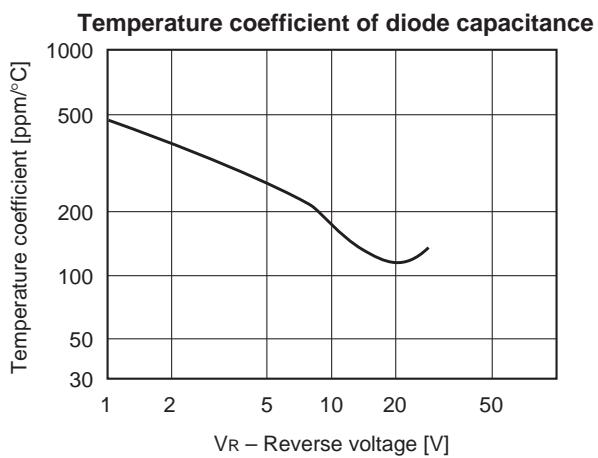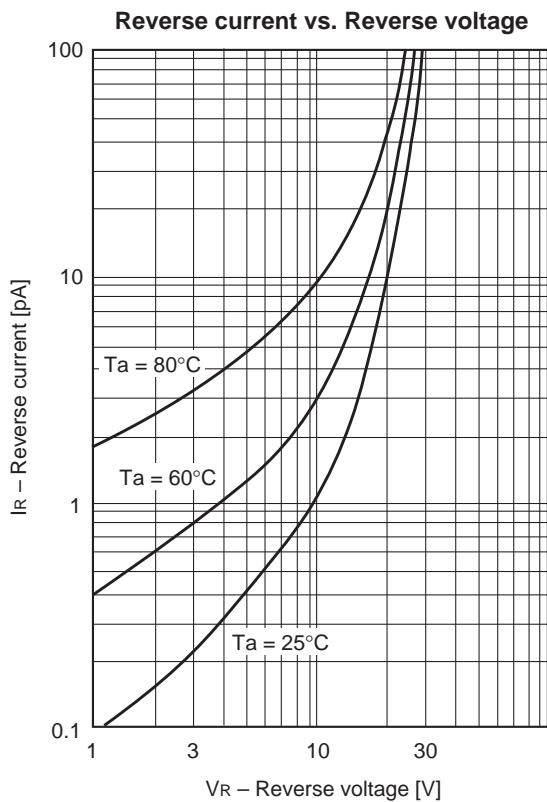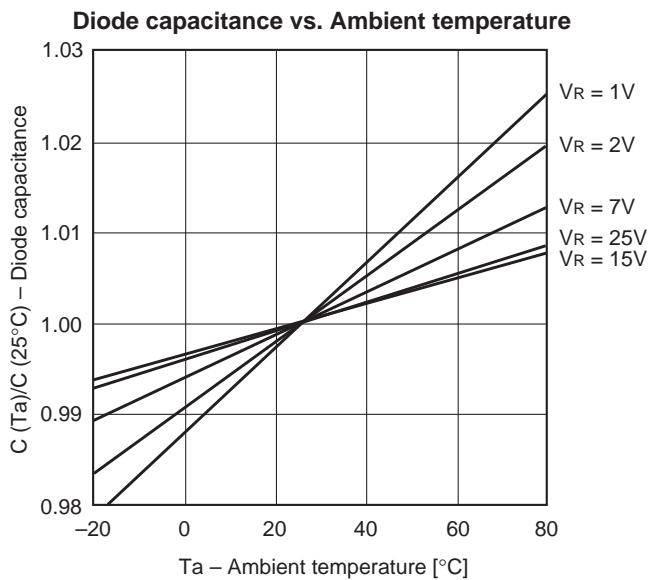

Package Outline

Unit: mm

M-235

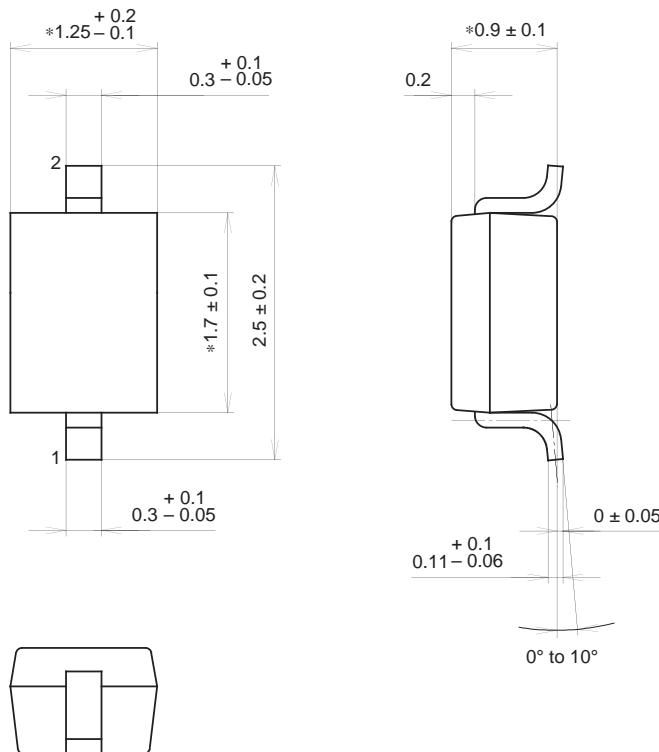


NOTE: Dimension "*" does not include mold protrusion.

| | |
|------------|-------|
| SONY CODE | M-235 |
| EIAJ CODE | _____ |
| JEDEC CODE | _____ |

| | |
|----------------|------|
| PACKAGE WEIGHT | 0.1g |
|----------------|------|

Marking

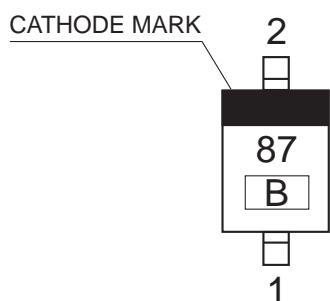

Note

B: Lot No. (Year and Month of manufacture)
 Year; Last one digit
 Month; A, B, C (for Oct. to Dec.)
 1 to 9 (for Jan. to Sept.)

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.