




SR2020PT THRU SR2060PT

20.0 AMPS. Schottky Barrier Rectifiers



Voltage Range
20 to 60 Volts
Current
20.0 Amperes


TO-3P/TO-247AD

Features

- ◇ Dual rectifier construction, positive center-tap
- ◇ Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- ◇ Metal silicon junction, majority carrier conduction
- ◇ Low power loss, high efficiency
- ◇ High current capability, low VF
- ◇ High surge capability
- ◇ Epitaxial construction
- ◇ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◇ Guardring for transient protection
- ◇ High temperature soldering guaranteed:
260°C/10seconds, 0.17" (4.3mm) lead lengths at 5 lbs., (2.3kg) tension

Mechanical Data

- ◇ Cases: JEDEC TO-3P/TO-247AD molded plastic
- ◇ Terminals: Leads solderable per MIL-STD-750, Method 2026
- ◇ Polarity: As marked
- ◇ Mounting position: Any
- ◇ Weight: 0.2 ounce, 5.6 grams

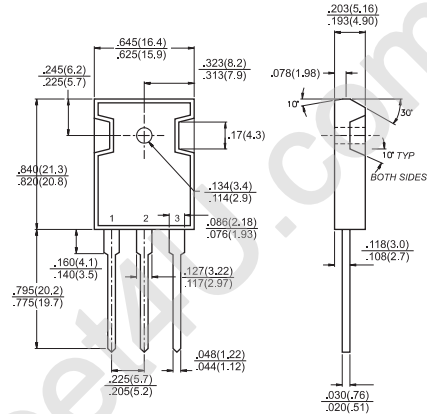

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	SR 2020PT	SR 2030PT	SR 2040PT	SR 2050PT	SR 2060PT	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	V
Maximum Average Forward Rectified Current at $T_c=105^\circ\text{C}$	$I_{(AV)}$	20					A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	250					A
Maximum Instantaneous Forward Voltage @10.0A (Note 3)	V_F	0.55			0.70		V
Maximum D.C. Reverse Current @ $T_c=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_c=100^\circ\text{C}$	I_R	1.0			50		mA
Typical Thermal Resistance Per Leg (Note 1)	$R_{\theta JC}$	1.5					$^\circ\text{C}/\text{W}$
Typical Junction Capacitance (Note 2)	C_j	600			400		pF
Operating Junction Temperature Range	T_J	-65 to +125			-65 to +150		$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150					$^\circ\text{C}$

- Notes: 1. Thermal Resistance from Junction to Case Per Leg.
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.
3. 300 us Pulse Width, 2% Duty Cycle

RATINGS AND CHARACTERISTIC CURVES (SR2020PT THRU SR2060PT)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

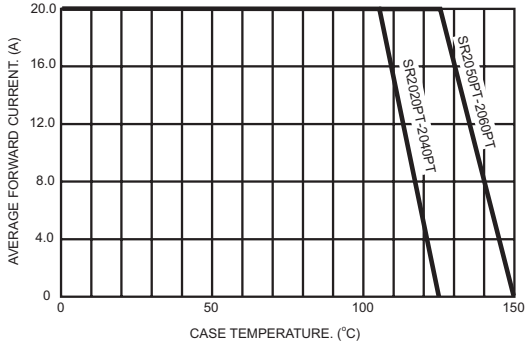


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

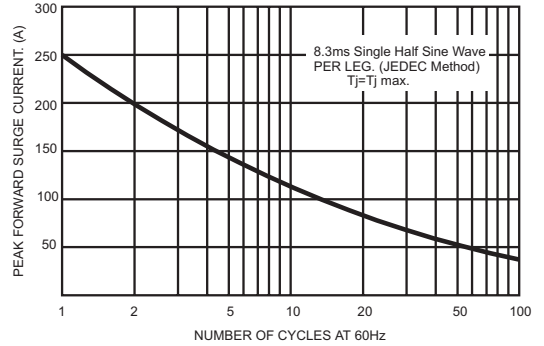


FIG.3- TYPICAL REVERSE CHARACTERISTICS PER LEG

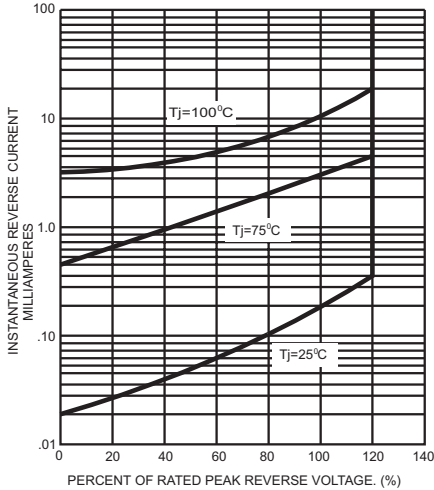


FIG.4- TYPICAL FORWARD CHARACTERISTICS

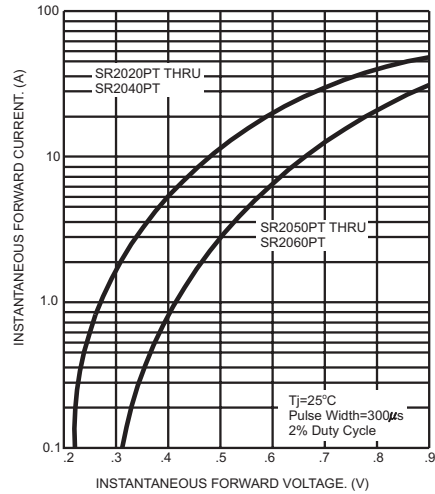


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

