

**DLN10**

Silicon Diffused Junction Type


Low-loss Rectifier**Features**

- Fast reverse recovery time, small switching loss.
- Peak reverse voltage : $V_{RM}=200$ to $400V$.
- Average rectified current : $I_O=1.0A$.

Package Dimensions

unit:mm

1264





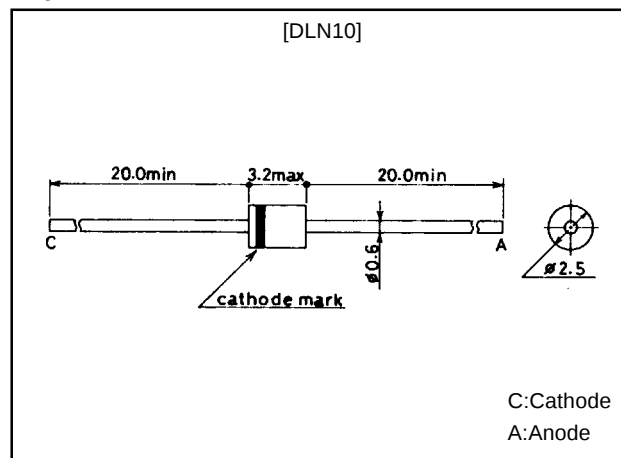
**Specifications****Absolute Maximum Ratings at $T_a = 25^\circ C$**

Parameter	Symbol	Conditions	DLN10C	DLN10E	Unit
Peak Reverse Voltage	V_{RM}		200	400	V
Average Rectified Current	I_O	[DLN10C] $T_a=25^\circ C$	1.0		A
		[DLN10E] $T_a=25^\circ C$		0.9	A
		$T_\ell = 137^\circ C$		1.0	A
Surge Forward Current	I_{FSM}	50Hz sine wave, non-repetitive, 1 cycle peak value	→	25	A
Junction Temperature	T_j		→	150	$^\circ C$
Storage Temperature	T_{stg}		→	-55 to +150	$^\circ C$

Electrical Characteristics at $T_a = 25^\circ C$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
[DLN10C]						
Forward Voltage	V _F	I _F =1A			0.98	V
Reverse Current	I _R	V _R =200V			10	μA
Reverse Recovery Time	t _{rr}	I _F =0.5A, I _R =1A			35	ns
Thermal Resistance	Rth(j- ℓ)	Junction-Lead			10	°C/W
	Rth(j-a)	Juntion-Ambeient			113	°C/W
[DLN10E]						
Forward Voltage	V _F	I _F =0.9A			1.3	V
Reverse Current	I _R	V _R =400V			10	μA
Reverse Recovery Time	t _{rr}	I _F =0.5A, I _R =1A			50	ns
Thermal Resistance	Rth(j- ℓ)	Junction-Lead			10	°C/W
	Rth(j-a)	Juntion-Ambient			113	°C/W

DLN10

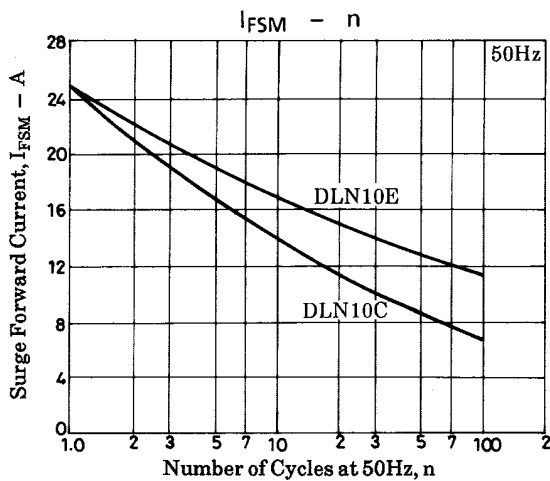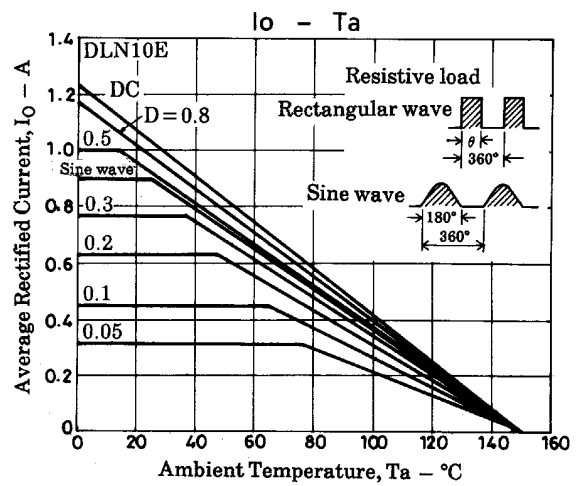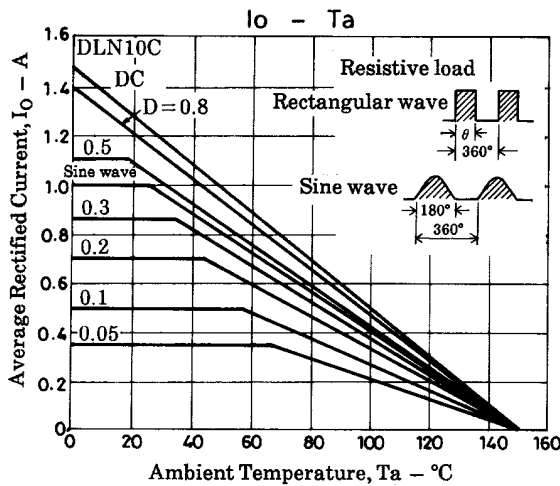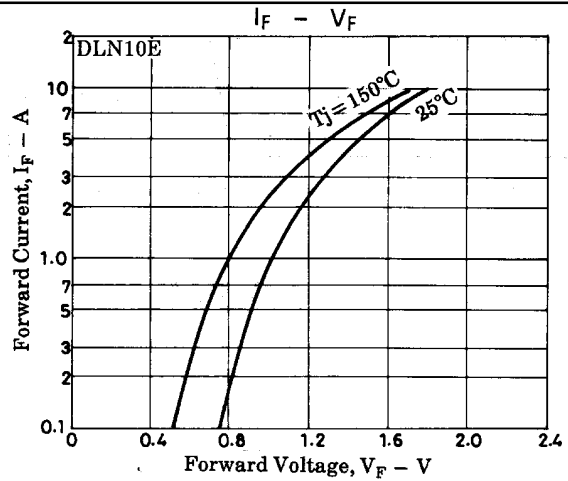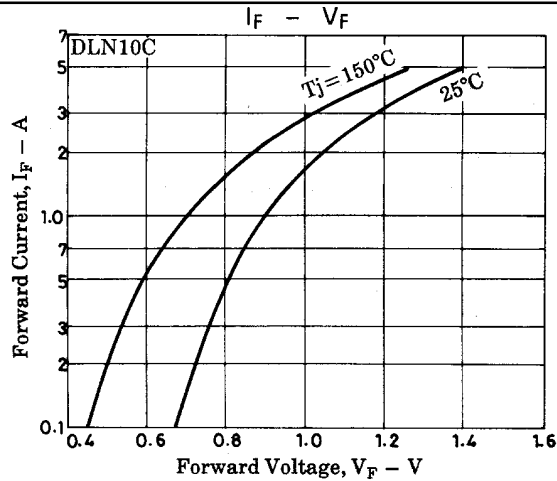

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 1998. Specifications and information herein are subject to change without notice.