

TLP722

Unit in mm

The TOSHIBA TLP722 consists of a photo-diode optically coupled to a gallium arsenide infrared emitting diode in a four lead plastic DIP (DIP4).


TLP722 : Single circuit

- Cathode-Anode Voltage : 30 V (max)
- Current Transfer Ratio : 0.1% (min)
- Input/Output Isolation Voltage : 4000 V_{rms} (min)
- Operating Temperature Range : -55~100°C
- Storage Temperature Range : -55~125°C
- UL Recognized : UL1577, E67349
- VDE Approved : VDE0884
 - Maximum Operating Insulation Voltage : 890 V_{PK}
 - Maximum Permissible Over Voltage : 8000 V_{PK}

(Note) : When a VDE0884 approved type is needed, please designate the “Option (D4)”


- SEMKO Approved Product : SS EN60950,
Approved No. 9808324 / 01
- Construction Mechanical Rating

	TLP722 type	TLP722F type
Creepage Distance	7.0 mm	8.0 mm
Clearance	7.0 mm	8.0 mm
Insulation Thickness	0.4 mm	0.4 mm

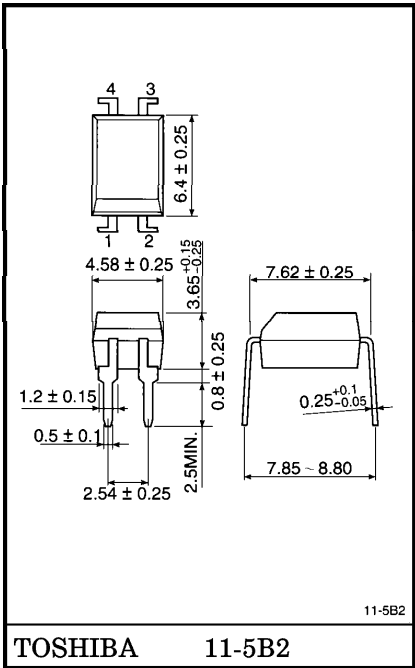

Weight : 0.28 g

PIN CONFIGURATIONS (TOP VIEW)

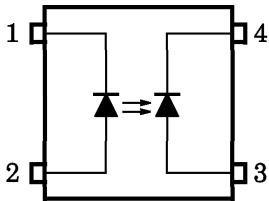

- 1 : LED CATHODE
- 2 : LED ANODE
- 3 : DETECTOR ANODE
- 4 : DETECTOR CATHODE

980910EBC1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		STMBOL	RATING	UNIT
LED	Forward Current	I _F	25	mA
	Forward Current Derating	$\Delta I_F / ^\circ\text{C}$	-0.45 (Ta $\geq 70^\circ\text{C}$)	mA / °C
	Pulse Forward Current	I _{FP}	1 (1 μs pulse, 1000 pps)	mA
	Pulse Forward Current	I _{FTP}	1 (100 μs pulse, 1000 pps)	A
	Reverse Voltage	V _R	5	V
DETECTOR	Cathode-Anode Voltage	V _{KAO}	30	V
	Anode-Cathode Voltage	V _{AKO}	0.5	V
	Photodiode Output Current	I _{PB}	100	μA
	Junction Temperature	T _j	125	°C
Storage Temperature Range		T _{stg}	-55~125	°C
Operating Temperature Range		T _{opr}	-55~100	°C
Lead Soldering Temperature (10 s)		T _{sol}	260 (10 s)	°C
Isolation Voltage		BVS	4000 (AC, 1 min., R.H. 60%)	V _{rms}

INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN	TYP.	MAX	UNIT
LED	Forward Voltage	V _F	I _F = 16 mA	—	1.65	1.85	V
	Reverse Current	I _R	V _R = 5 V	—	—	10	μA
	Capacitance	C _T	V = 0, f = 1 MHz	—	30	—	pF
DETECTOR	Cathode-Anode Breakdown Voltage	V (BR) KAO	I _{KA} = 0.1 mA	30	—	—	V
	Anode-Cathode Breakdown Voltage	V (BR) AKO	I _{AK} = 0.1 mA	0.5	—	—	V
	Dark Current	I _{leak}	V _{KA} = 10 V	—	—	50	nA
			V _{KA} = 10 V, Ta = 85°C	—	—	1	μA
	Photodiode Output Current	I _{PB}	V = 10 mA, V _{KA} = 5 V	10	—	50	μA
	Capacitance	C _{AK}	V = 0, f = 1 MHz	—	10	—	pF

ISOLATION CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	TYP.	MAX	UNIT
Capacitance (Input to Output)	C _S	V _S = 0, f = 1 MHz	—	0.8	—	pF
Isolation Resistance	R _S	V _S = 500 V	1×10^{12}	10^{14}	—	Ω
Isolation Voltage	BVS	AC, 1 minute	4000	—	—	V _{rms}
		AC, 1 second, in oil	—	10000	—	
		DC, 1 minute, in oil	—	10000	—	V _{dc}