



Inductors/Transformers

Customizable, Surface Mount Torodial,
Kool-Mu®, Powdered Iron and MPP Cores



FEATURES

- Toroidal design for minimal EMI radiation in DC to DC converter applications.
- Designed to support the growing need for efficient DC to DC converters in battery operated equipment.
- Two separate windings provide versatility by ability to connect windings in series or parallel.
- Supplied on tape and reel and is designed to be pick and place compatible.
- Custom versions and turns ratios available. Contact the factory with your specifications.
- Half and quarter height parts available upon request.

STANDARD ELECTRICAL SPECIFICATIONS (In Parallel)

MODEL LA=KOOL-MU® CORE	ACTUAL INDUCTANCE – μH (L_{OC}) $\pm 15\%$	RATED IDC (40°C†)	INDUCTANCE @ IDC (L_{BIAS}) [30%]	DCR Ω
LPT-4545-1R0LA	0.832	6.90	0.51 @ 7.62	0.003
LPT-4545-1R5LA	1.30	6.45	0.80 @ 6.10	0.004
LPT-4545-2R5LA	2.55	5.75	1.57 @ 4.35	0.006
LPT-4545-3R3LA	3.33	5.50	2.05 @ 3.81	0.007
LPT-4545-5R0LA	5.20	4.45	3.20 @ 3.05	0.011
LPT-4545-100LA	10.2	3.45	6.28 @ 2.18	0.019
LPT-4545-150LA	15.0	2.79	9.26 @ 1.79	0.029
LPT-4545-200LA	20.8	2.61	12.4 @ 1.53	0.038
LPT-4545-250LA	25.2	2.25	15.5 @ 1.39	0.048
LPT-4545-330LA	32.5	1.85	20.0 @ 1.22	0.068
LPT-4545-500LA	50.0	1.50	30.8 @ 0.98	0.107
LPT-4545-101LA	101	1.15	62.0 @ 0.69	0.195
LPT-4545-151LA	152	0.92	93.4 @ 0.56	0.302
LPT-4545-251LA	248	0.73	153.0 @ 0.44	0.491
LPT-4545-301LA	300	0.63	179.0 @ 0.40	0.670
LPT-4545-331LA	333	0.60	205.0 @ 0.38	0.706
LB=POWDER IRON				
LPT-4545-1R0LB	0.838	6.61	0.53 @ 7.09	0.004
LPT-4545-1R5LB	1.21	6.08	0.76 @ 5.91	0.005
LPT-4545-2R5LB	2.71	5.01	1.71 @ 3.94	0.009
LPT-4545-3R3LB	3.35	4.22	2.11 @ 3.54	0.012
LPT-4545-5R0LB	5.66	3.32	3.57 @ 2.73	0.019
LPT-4545-100LB	10.9	2.52	6.84 @ 1.97	0.034
LPT-4545-150LB	14.8	2.10	9.31 @ 1.69	0.049
LPT-4545-250LB	26.3	1.61	16.5 @ 1.27	0.084
LPT-4545-330LB	34.3	1.34	21.6 @ 1.11	0.119
LPT-4545-500LB	51.0	1.09	32.1 @ 0.91	0.180
LPT-4545-101LB	105	0.81	66.2 @ 0.63	0.342
LPT-4545-151LB	150	0.66	94.7 @ 0.53	0.509
LPT-4545-251LB	248	0.52	156.0 @ 0.41	0.831
LPT-4545-331LB	335	0.43	211.0 @ 0.35	10.194
LC=MPP				
LPT-4545-1R0LC	0.838	7.54	0.54 @ 11.11	0.004
LPT-4545-1R5LC	1.30	6.82	0.84 @ 8.89	0.004
LPT-4545-2R5LC	2.55	5.84	1.64 @ 6.35	0.007
LPT-4545-3R3LC	3.33	5.49	2.14 @ 5.56	0.008
LPT-4545-5R0LC	5.20	4.37	3.35 @ 4.45	0.012
LPT-4545-100LC	10.2	3.32	6.56 @ 3.18	0.022
LPT-4545-150LC	15.0	2.69	9.68 @ 2.61	0.033
LPT-4545-250LC	25.2	2.12	16.2 @ 2.02	0.054
LPT-4545-330LC	32.5	1.76	20.9 @ 1.78	0.076
LPT-4545-500LC	50.0	1.41	32.2 @ 1.43	0.119
LPT-4545-101LC	101	1.07	64.8 @ 1.01	0.219
LPT-4545-151LC	152	0.86	97.7 @ 0.82	0.340
LPT-4545-251LC	248	0.67	159.0 @ 0.64	0.551
LPT-4545-331LC	333	0.56	214.0 @ 0.56	0.788


Models LPT-4545-xxxLA, LB, LC

Vishay Dale




DIMENSIONAL CONFIGURATIONS

[Numbers in brackets indicate millimeters]

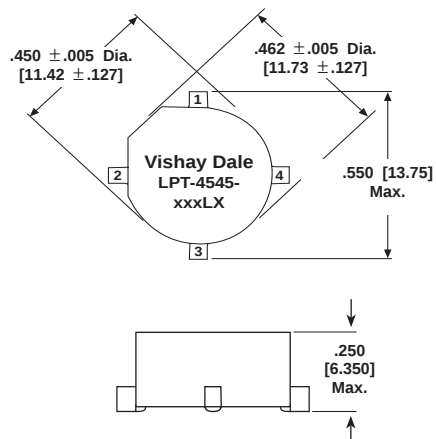


RECOMMENDED LAYOUT PATTERN (Top View)

[Numbers in brackets indicate millimeters]

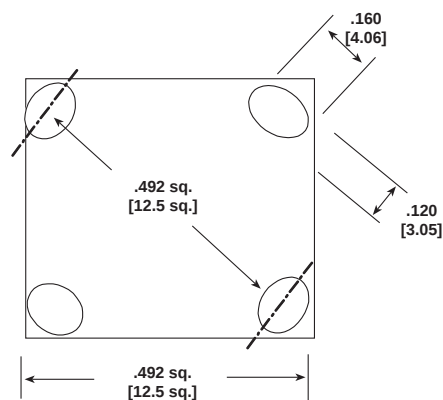

SCHEMATICS - CONNECTION DIAGRAMS

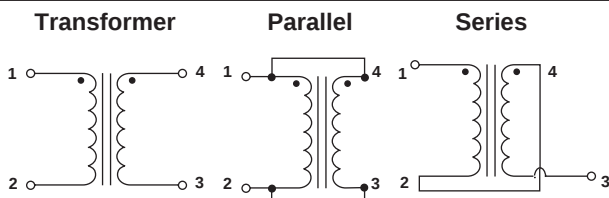

PART MARKING

- Vishay Dale
- Model number
- Pin 1 identification

HOW TO ORDER

LPT
MODEL

4545
SIZE


100
INDUCTANCE VALUE
(μ H)

± 15%
INDUCTANCE TOLERANCE

LA/LB/LC
CORE/HEIGHT
LA = KOOL-MU®
LB = POWDER IRON
LC = MPP

PACKAGING [Numbers in brackets indicate millimeters]

Pocket Tape Orientation

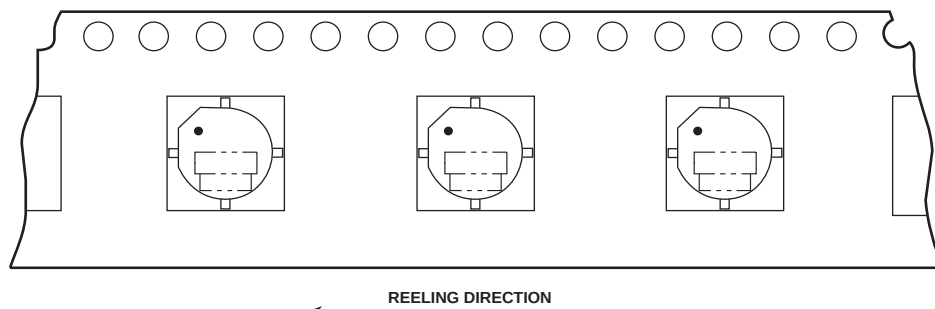

Carrier Tape Width	.945 [24.0]
Pitch	.630 [16.0]
Parts per 13" [330.2] Reel	600

All embossed carrier tape packaging will be in compliance with the latest revision of EIA-481.