

DURACELL[®]

COPPERTOP[™]

MN1500

Size: AA (LR6)

Alkaline-Manganese Dioxide Battery

Zn/MnO₂

Dimensions shown are ANSI/IEC standards

Nominal Voltage:	1.5 V
Nominal Internal Impedance:	120 m-ohm @ 1kHz
Average Weight:	24 gm (0.84 oz.)
Volume:	8.4 cm ³ (0.51 in. ³)
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
ANSI:	15A
IEC:	LR6

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

Service Hours	3.9 OHMS (V)	10 OHMS (V)	24 OHMS (V)	43 OHMS (V)
0	1.50	1.50	1.50	1.50
10	1.10	1.35	1.40	1.45
20	-	1.00	1.30	1.38
40	-	-	1.10	1.25
60	-	-	0.85	1.10
80	-	-	-	0.95
100	-	-	-	0.85
110	-	-	-	0.80

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Duracell for the latest information

4/03


DURACELL[®] COPPERTOP[™] MN1500

Alkaline-Manganese Dioxide Battery


Size: AA (LR6)

Zn/MnO₂


TYPICAL CONSTANT CURRENT DISCHARGE CHARACTERISTICS AT 21°C (70°F)

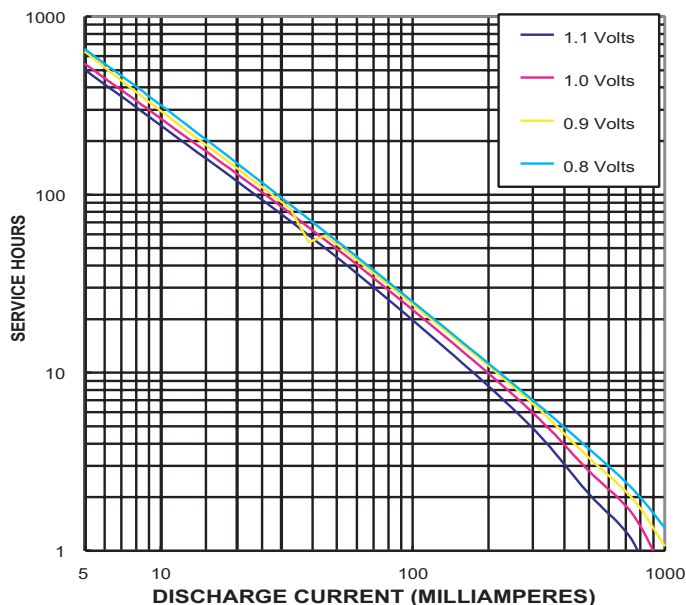

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

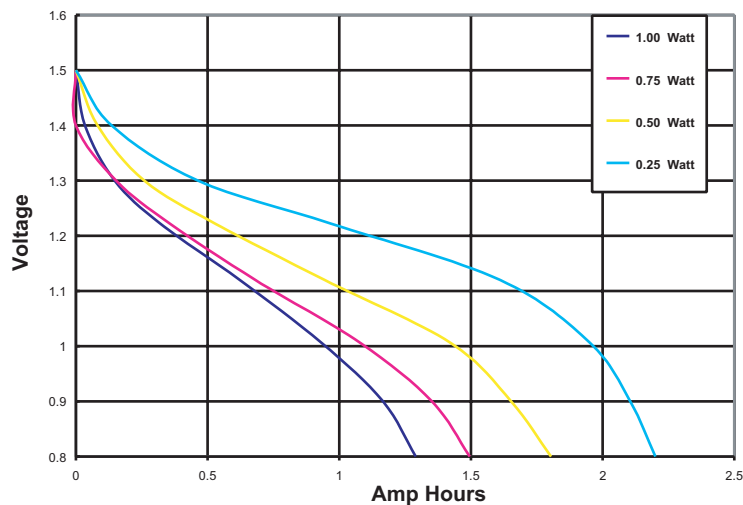

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

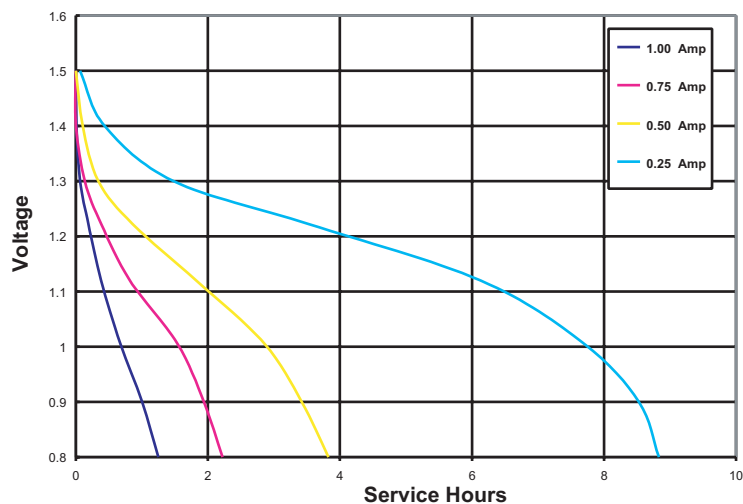

DURACELL[®]
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.