


# SB520 THRU SB5100

HIGH CURRENT SCHOTTKY BARRIER RECTIFIERS  
VOLTAGE - 20 to 100 Volts CURRENT - 5.0 Amperes

## FEATURES

- Low cost
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0 utilizing
- Metal to silicon rectifier, Majority carrier conduction
- Low power loss, high efficiency
- High current capability, Low  $V_F$
- High surge capacity
- Epitaxial construction
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 250  $\phi$ J/10 seconds/.375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension

DO-201AD

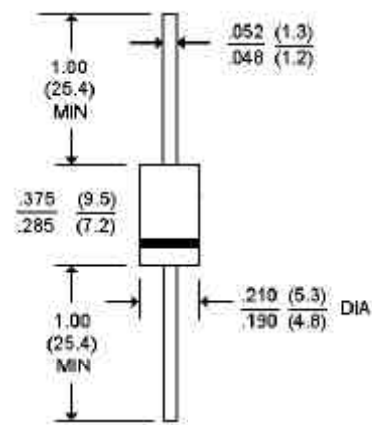

Dimensions in inches and (millimeters)

## MECHANICAL DATA

- Case: Molded plastic, DO-201AD
- Terminals: Axial leads, solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode
- Mounting Position: Any
- Weight: 0.04 ounce, 1.12 gram

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25  $\phi$ J ambient temperature unless otherwise specified.

Resistive or inductive load.

For capacitive load, derate current by 20%.

|   | SB520       | SB530 | SB540 | SB550 | SB560 | SB580 | SB5100 | UNITS      |
|---|-------------|-------|-------|-------|-------|-------|--------|------------|
| Maximum Recurrent Peak Reverse Voltage  | 20          | 30    | 40    | 50    | 60    | 80    | 100    | V          |
| Maximum RMS Voltage   | 14          | 21    | 28    | 35    | 42    | 56    | 80     | V          |
| Maximum DC Blocking Voltage   | 20          | 30    | 40    | 50    | 60    | 80    | 100    | V          |
| Maximum Average Forward Rectified Current, .375" (9.5mm) Lead Length (Fig. 1)                     | 5.0         |       |       |       |       |       |        | A          |
| Peak Forward Surge Current, 8.3ms single half sine wave superimposed on rated load (JEDEC method) | 150         |       |       |       |       |       |        | A          |
| Maximum Instantaneous Forward Voltage at 5.0A   | 0.55        |       | 0.70  |       | 0.85  |       |        | V          |
| Maximum DC Reverse Current $T_A=25 \phi$ J  | 0.5         |       |       |       |       |       |        | mA         |
| Reverse Voltage $T_A=100 \phi$ J  | 50.0        |       |       |       |       |       |        |            |
| Typical Thermal Resistance (Note 1) R $\theta$ KJL  | 15          |       |       | 10    |       |       |        | $\phi$ J/W |
| Typical Junction capacitance (Note 2)   | 500         |       |       | 380   |       |       |        | pF         |
| Operating and Storage Temperature Range $T_J, T_{STG}$  | -50 TO +125 |       |       |       |       |       |        | $\phi$ J   |

## NOTES:

1. Thermal Resistance Junction to Lead Vertical PC Board Mounting .375(9.5mm) Lead Lengths
2. Measured at 1 MHz and applied reverse voltage of 4.0 Volts

# RATING AND CHARACTERISTIC CURVES

## SB520 THRU SB5100

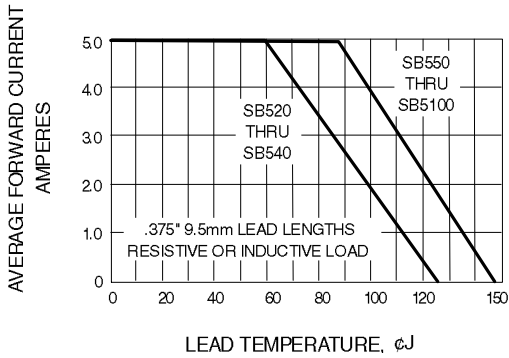


Fig. 1-FORWARD CURRENT DERATING CURVE

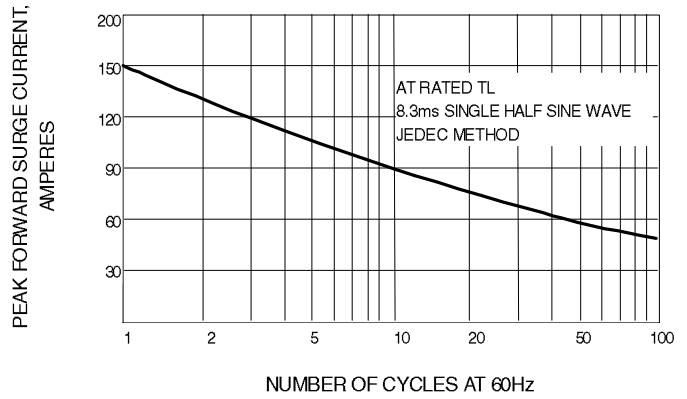


Fig. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

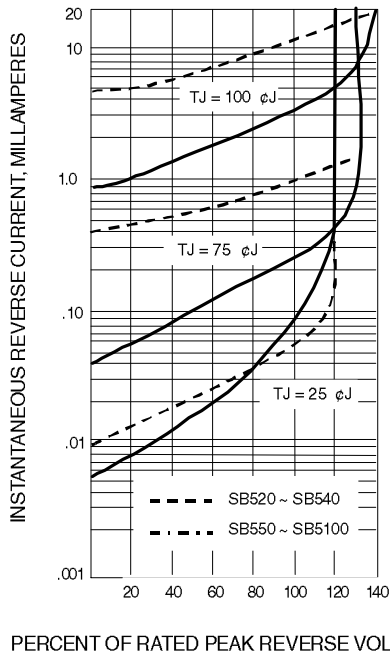


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

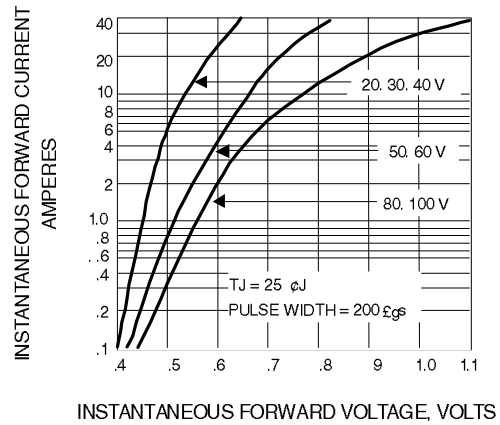


Fig. 4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

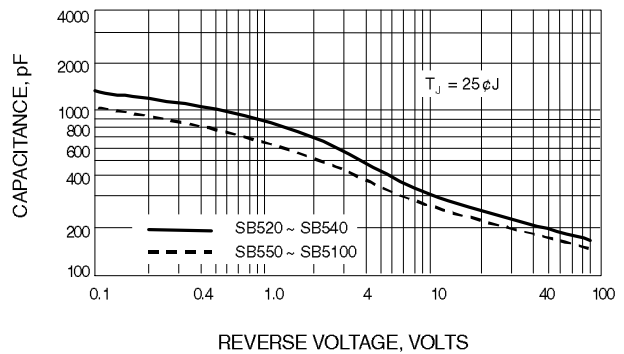


Fig. 5-TYPICAL JUNCTION CAPACITANCE