

VI TELEFILTER**Filter Specification****TFH 70E****1/5****1. Measurement condition :**

Ambient temperature T_A : 23 °C
 Input power level: 0 dBm.
 Terminating impedances at f_c : for input: 1287 Ω | - 6,97 pF.
 for output: 1227 Ω | - 7,18 pF.
 Q-value of matching elements: > 50

2. Characteristics :

Remark: The insertion loss a_e is defined as the insertion loss at the nominal frequency f_N . Reference level for the relative attenuation a_{rel} of the **TFH 70E** is the insertion loss. The reference frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The temperature coefficient of frequency T_{c_f} is valid both for the reference frequency f_c and the frequency response of the filter in the operating temperature range. The frequency shift of the filter in the operating temperature range is included in the production tolerance scheme.

Data	typ. value	tolerance / limit
Insertion loss (Reference level) a_e	25 dB	max. 27 dB
Nominal frequency f_N		70 MHz
Centre frequency f_c at ambient temperature T_A (f_{CAT})	70,01 MHz	70,0 $\pm$ 0,09 MHz
Pass band at ambient temperature T_A : (PB)		$f_N \dots f_N \pm 1,5$ MHz
Amplitude ripple in O.T.R. (p-p) in : $f_N \dots f_N \pm 1,4$ MHz	0,5 dB	max. 0,8 dB
Bandwidth in O.T.R. :		
0,8 dB - band width	3,19 MHz	min. 2,8 MHz
1 dB - band width	3,22 MHz	min. 3,0 MHz
3 dB - band width	3,61 MHz	min. 3,5 MHz
20 dB - band width	4,66 MHz	
40 dB - band width	5,21 MHz	max. 5,6 MHz
45 dB - band width	5,31 MHz	
Relative attenuation a_{rel}		
$f_N \dots f_N \pm 1,4$ MHz	0,5 dB	max. 0,8 dB
$f_N \pm 1,4$ MHz ... $f_N \pm 1,5$ MHz	0,7 dB	max. 1 dB
$f_N \pm 1,5$ MHz ... $f_N \pm 1,75$ MHz	2,5 dB	max. 3 dB
$f_N \pm 2,8$ MHz ... $f_N \pm 5,0$ MHz	44...53 dB	min. 40 dB
$f_N \pm 5,0$ MHz ... $f_N \pm 20$ MHz	53...65 dB	min. 50 dB
$f_N - 65$ MHz ... $f_N - 20$ MHz	75...65 dB	
$f_N + 35$ MHz ... $f_N + 63$ MHz	42...45 dB	
$f_N + 63$ MHz ... $f_N + 200$ MHz	65...70 dB	
Group delay (mean value in PB):	2,76 μ s	
Group delay ripple in PB (p-p):	45 ns	max. 100 ns
Deviation from linear phase in PB band (p-p):	2,6° (r.m.s. 0,6°)	max. 6°
(S11) / (S22) in PB :	3 / 3 dB	
Triple transit attenuation compared to main signal	59 dB	
Crosstalk	52 dB	
Frequency inversion temperature (T_o)	30 °C	
Temperature coefficient of frequency (T_{c_f})	-0,045 ppm/K ²	
Frequency deviation of f_c over temperature: *)	$\Delta f_c(\text{Hz}) = T_{c_f}(\text{ppm/K}) \times (T - T_o)^2 \times f_{T_o}(\text{MHz})$	
Operating temperature range (O.T.R.)	0 °C ... + 70 °C	
Storage temperature range	-40 °C ... + 85 °C	

*) f_{T_o} is reference frequency f_c at frequency inversion temperature (T_o)

Generated: _____


Checked/Approved: _____

VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
e-mail: tft@telefilter.com


Vectron International, Inc.
267 Lowell Road
Hudson, NH 03051 / USA
Tel: (603) 598-0070 Fax: (603) 598-0075
e-mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

3. Package :

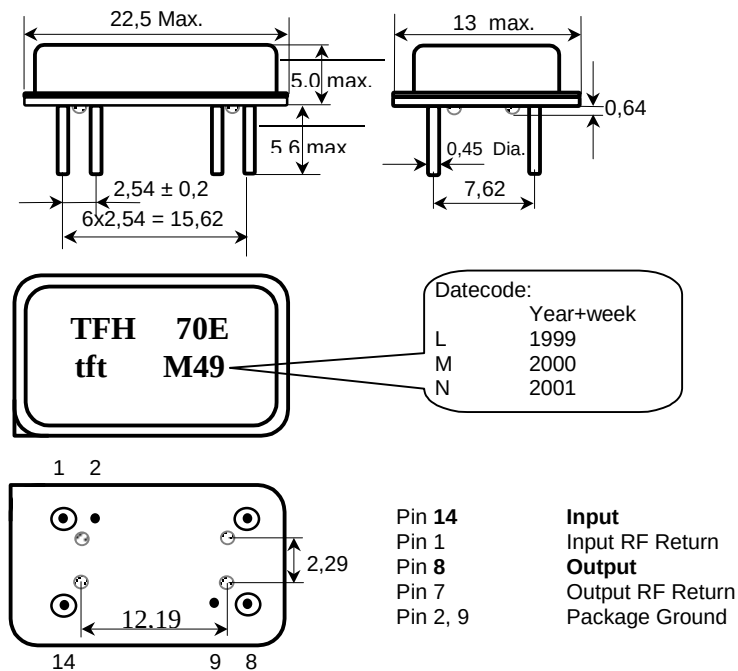

4. 50 Ω matching network : (see Application Note of TFH 70E)

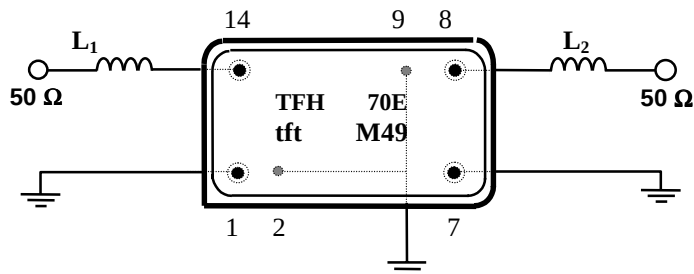

5. Stability characteristics :

After the following tests the filter shall meet the whole specification :

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
3. Damp heat:
(cycle) 25 °C to 55°C / 95% r.H. / 10 cycles
DIN IEC 68 - 2 – 30 Db
4. Resistance to
solder heat (reflow): max. 2 times reflow process;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;

6. Air reflow temperature conditions :

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

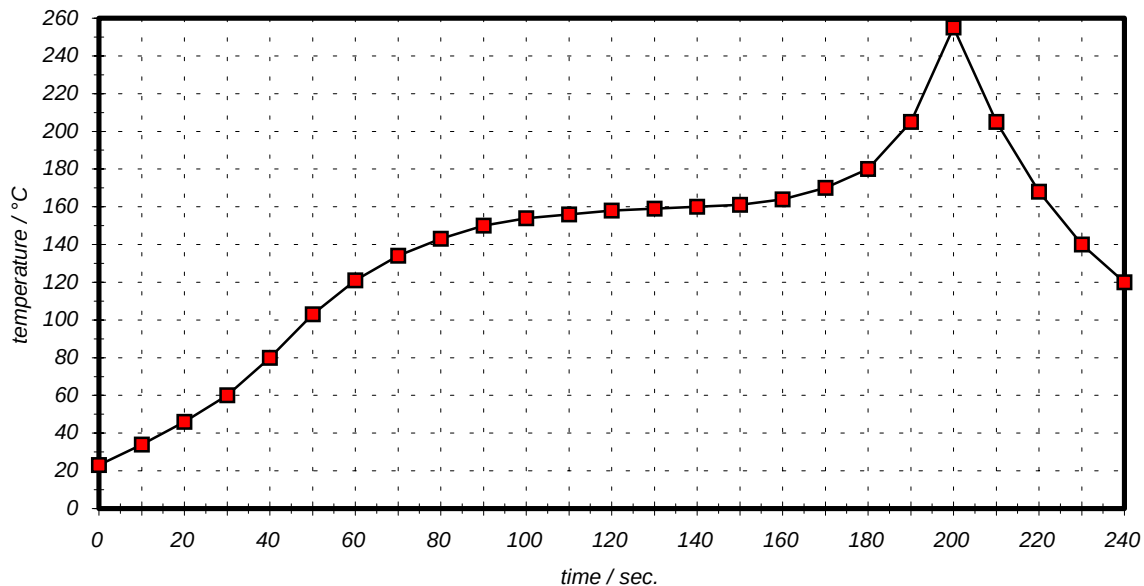
Air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

7. History :

Version	Reason of changes	Name	Date
1.0	Generate Filter Specification of TFS 70V :	Dunzow W.	06.12.2000
1.1	Change name from TFS 70V to TFH70E .	Dunzow / Wall	08.03.2001
1.2	Correct definition of insertion loss. Correct typical filter data. Reduce max. pass band ripple from 1 db to 0,8 dB. Correct termination impedances .	Dunzow / Wall	09.03.2001