

- ◆ CMOS 2-Input OR Gate
- ◆ High Speed Operation $t_{pd}=8\text{ns}$ TYP
- ◆ Operating Voltage Range 2V~5.5V
- ◆ Low Power Consumption $1\mu\text{A}$ MAX

Applications

- Palmtops
- Digital Equipment

General Description

The XC74UL32AA is a 2-input CMOS OR gate, manufactured using silicon gate CMOS fabrication.

CMOS low power circuit operation makes high speed LS-TTL operations achievable.

With a wave forming buffer connected internally, stabilized output can be achieved as the circuit offers high noise immunity.

As the XC74UL32AA is integrated into mini molded, SSOT-25 and SOT-25 packages, high density mounting is possible.

Features


High Speed Operation: $t_{pd}=8\text{ns}$ TYP

Operating Voltage Range: 2V~5.5V

Low Power Consumption: $1\mu\text{A}$ MAX

Space Saving Package: SSOT-25 and SOT-25

Pin Configuration

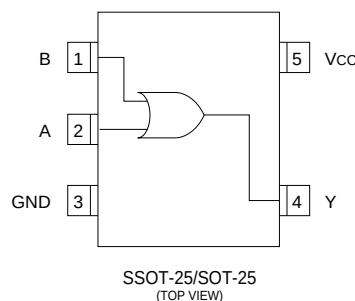

Function

INPUT		OUTPUT
A	B	Y
L	L	L
L	H	H
H	L	H
H	H	H

H=High level, L=Low level

Absolute Maximum Ratings

$T_a = -40^\circ\text{C} \sim 85^\circ\text{C}$

PARAMETER	SYMBOL	RATINGS	UNITS
Power Supply Voltage	V_{CC}	-0.5 ~ +6.0	V
Input Voltage	V_{IN}	-0.5 ~ +6.0	V
Output Voltage	V_{OUT}	-0.5 ~ $V_{CC} + 0.5$	V
Input Diode Current	I_{IK}	-20	mA
Output Diode Current	I_{OK}	± 20	mA
Output Current	I_{OUT}	± 25	mA
V_{CC} , GND Current	I_{CC} , I_{GND}	± 50	mA
Continuous Total Power Dissipation	P_d	150	mW
Storage Temperature	T_{stg}	-65 ~ +150	$^\circ\text{C}$

Note: Voltage is all Ground standardized.

Ordering Information

XC74UL xxxxxx
 ↑↑
 a b

DESIGNATOR	DESCRIPTION
a	Package Type N=SSOT-25 M=SOT-25
b	Device Orientation R=Embossed Tape (Orientation of Device:Right) L=Embossed Tape (Orientation of Device:Left)

DC Electrical Characteristics

PARAMETER	SYMBOL	CONDITIONS		Ta=25℃			Ta=-40~85℃		UNITS		
				VCC(V)	MIN	TYP	MAX	MIN		MAX	
Input Voltage	VIH	2.0			1.5	-	-	1.5	-	V	
		3.0			2.1	-	-	2.1	-		
		5.5			3.85	-	-	3.85	-		
	VIL	2.0			-	-	0.5	-	0.5	V	
		3.0			-	-	0.9	-	0.9		
		5.5			-	-	1.65	-	1.65		
Output Voltage	VOH	2.0	VIN=VIH or VIL	IOH=-50μA	1.9	2.0	-	1.9	-	V	
		3.0			2.9	3.0	-	2.9	-		
		4.5			4.4	4.5	-	4.4	-		
		3.0			2.58	-	-	2.48	-		
		4.5			3.94	-	-	3.80	-		
	VOL	2.0	VIN=VIH	IOL=50μA	-	-	0.1	-	0.1	V	
		3.0			-	-	0.1	-	0.1		
		4.5			-	-	0.1	-	0.1		
		3.0			IOL=4mA	-	-	0.36	-		0.44
		4.5			IOL=8mA	-	-	0.36	-		0.44
Input Current	IIN	5.5	VIN=VCC or GND		-0.1	-	0.1	-1.0	1.0	μA	
Quiescent Supply Current	ICC	5.5	VIN=VCC or GND. IOUT=0μA		-	-	1.0	-	10.0		


Switching Electrical Characteristics

PARAMETER	SYMBOL	C _L	V _{CC} (V)	CONDITIONS	Ta=25°C			Ta=-40~85°C		UNITS
					MIN	TYP	MAX	MIN	MAX	
Propagation Delay Time	t _{PLH}	15pF	3.3		-	5.5	7.9	1	9.5	ns
			5.0		-	3.8	5.5	1	6.5	
		50pF	3.3		-	8	11.4	1	13	ns
			5.0		-	5.3	7.5	1	8.5	
	t _{PHL}	15pF	3.3		-	5.5	7.9	1	9.5	ns
			5.0		-	3.8	5.5	1	6.5	
		50pF	3.3		-	8	11.4	1	13	ns
			5.0		-	5.3	7.5	1	8.5	
Input Capacitance	C _{IN}	-	5.0	V _{IN} =V _{CC} or GND	-	2	10	-	10	pF
Power Dissipation Capacitance	C _{pd}			No Load, f=1MHz	-	8.9	-	-	-	pF


Recommended Operating Conditions

PARAMETER	SYMBOL	V _{CC} (V)	CONDITIONS	UNITS
Supply Voltage	V _{CC}	-	2 ~ 5.5	V
Input Voltage	V _{IN}	-	0 ~ 5.5	V
Output Voltage	V _{OUT}	-	0 ~ V _{CC}	V
Operating Temperature	T _{opr}	-	-40 ~ +85	°C
Output Current	I _{OH}	3.0	-4	mA
		4.5	-8	
	I _{OL}	3.0	4	
		4.5	8	
Input Rise and Fall Time	t _r , t _f	3.3	0 ~ 100	ns/V
		5.0	0 ~ 20	

Waveforms

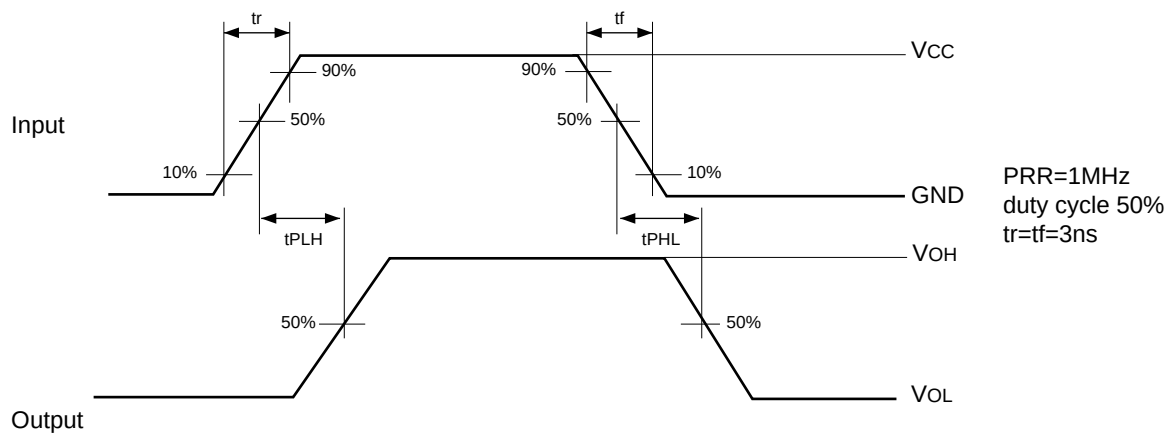

Typical Application Circuit

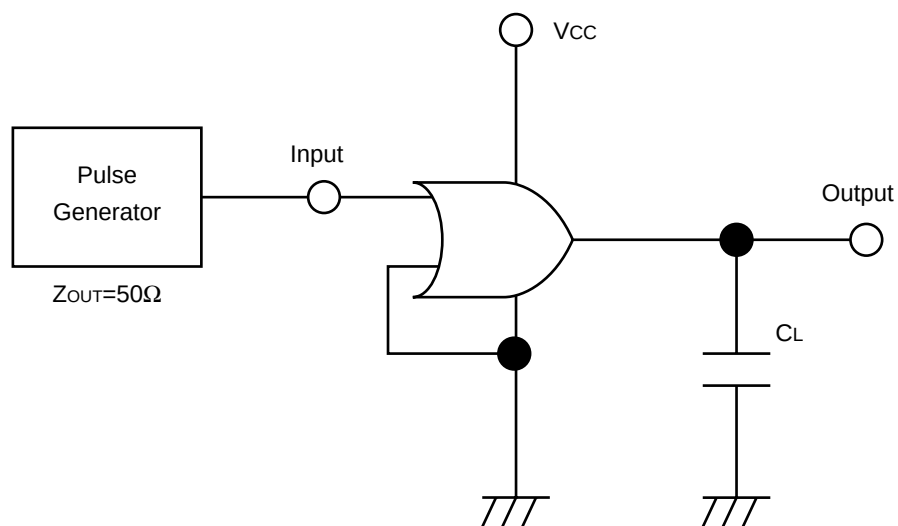

Note: open output when measuring supply current