

VHF POWER MOSFET

N-Channel Enhancement Mode

DESCRIPTION:

The **UFT150-28** is a gold metallized N-Channel enhancement mode MOSFET, intended for use in 28 VDC large signal applications to 512 MHz.


FEATURES:

- $P_G = 8.0$ dB Typical at 512 MHz
- No thermal Runaway
- **Omnigold™** Metalization System

MAXIMUM RATINGS

I_D	16 A
V_{DSS}	65 V
V_{GS}	± 40 V
V_{DGR}	65 V
P_{DISS}	300 W @ $T_C = 25^\circ\text{C}$
T_J	-65°C to $+200^\circ\text{C}$
T_{STG}	-65°C to $+150^\circ\text{C}$
θ_{JC}	0.6°C/W

PACKAGE STYLE .500 4L FLG

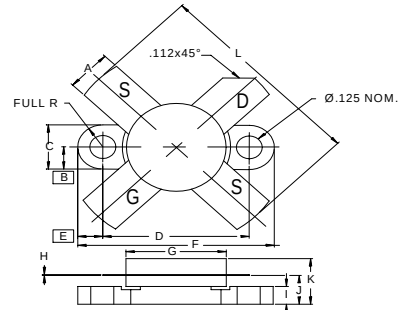

DIM	MINIMUM inches / mm	MAXIMUM inches / mm
A	.220 / 5.59	.230 / 5.84
B	.125 / 3.18	
C	.245 / 6.22	.255 / 6.48
D	.720 / 18.28	.730 / 18.54
E	.125 / 3.18	
F	.970 / 24.64	.980 / 24.89
G	.495 / 12.57	.505 / 12.83
H	.003 / 0.08	.007 / 0.18
I	.090 / 2.29	.110 / 2.79
J	.150 / 3.81	.175 / 4.45
K		.280 / 7.11
L	.980 / 24.89	1.050 / 26.67

CHARACTERISTICS $T_C = 25^\circ\text{C}$

SYMBOL	TEST CONDITIONS		MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{DSS}	$I_{DS} = 100$ mA		60			V
I_{DSS}	$V_{DS} = 28$ V	$V_{GS} = 0$ V			5.0	mA
I_{GSS}	$V_{DS} = 0$ V	$V_{GS} = 20$ V			1.0	μA
$V_{GS(th)}$	$I_D = 100$ mA	$V_{DS} = 10$ V	1.0		5.0	V
g_{fs}	$I_D = 5$ A	$V_{DS} = 10$ V	3.5			mho
C_{iss} C_{oss} C_{rss}	$V_{DS} = 28$ V	$V_{GS} = 0$ V	$f = 1.0$ MHz		375 188 26	pF
P_G η_D	$V_{DD} = 28$ V $P_{IN} = 15$ W	$I_{DQ} = 250$ mA	$P_{out} = 150$ W $f = 512$ MHz	7.0 50	8.0 60	dB %