


DESCRIPTION

MBB51TBH is high efficiency InGaN BLUE LED lamp with a 468nm peak wavelength encapsulated in a 5mm diameter clear transparent lens.

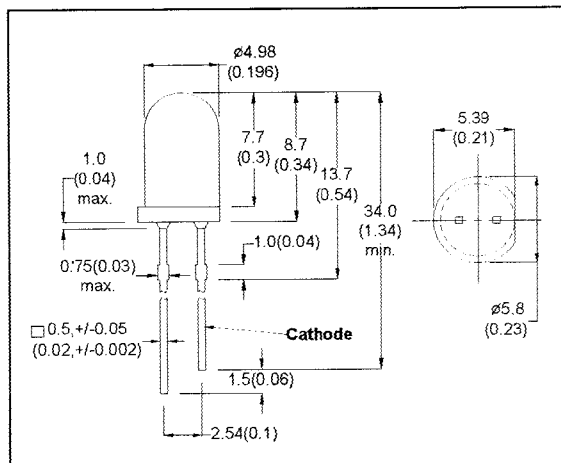

- All dimension in mm (inch)
- No scale
- Tol.: +/-0.3mm

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @ Ta=25°C	120mW
Forward Current, DC (IF)	30mA
Reverse Voltage	5V
Operating Temperature	-20 to +80°C
Storage Temperature	-30 to +100°C
Lead Soldering Temperature (1/16" from body)	260°C for 5 sec.

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF		3.7	4.5	V	IF=20mA
Reverse Breakdown Voltage	BVR	5			V	IR=10μA
Luminous Intensity	IV	1500	2600		mcd	IF=20mA
Peak Wavelength	λp		468		nm	IF=20mA
Spectral Line Half Width	Δλ		26		nm	IF=20mA
Viewing Angle	2θ 1/2		30		degree	IF=20mA

Remark : For A&A only.

A&A No.: 8

CAUTION

Static electricity does damage these product. Take preventive measures in handling.



MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

Rev.A.