


# NAN40 SERIES

Dual and triple output

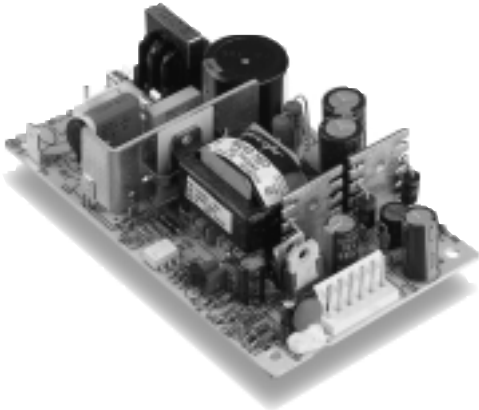

- **5.0 x 3.0 x 1.2 inch package (1U applications)**
- **Ideal for high volume designs**
- **Industry standard package**
- **Oversvoltage and short circuit protection**
- **40W with free air convection**
- **EN55022, EN55011 conducted emissions level B**

The NAN40 series are 40W universal input AC/DC power supplies on a 5 x 3 inch card with a maximum component height of 1.2 inch for use in 1U applications. These series are available with a wide range of models in the industry standard 5 x 3 inch footprint at low cost making the series ideal for new and existing high volume communication and industrial applications. The NAN40 series provide 40W of output power with free air convection cooling with a peak output of 50W for a maximum duration of 60 seconds. The NAN40 series are designed for use in high volume low power data networking, computer and telecom applications such as hubs, routers, POS terminals, cable modems and PABX's. This list is not exclusive as the generic feature set of both series with industry standard output configurations provide a solution for most high volume applications including many industrial applications.

[ 2 YEAR WARRANTY ]



## SPECIFICATION All specifications are typical at nominal input, full load at 25°C unless otherwise stated


OUTPUT SPECIFICATIONS		
Line regulation	Main output Auxiliary outputs	±0.5% ±1.0%
Total regulation	Main output Auxiliary outputs	±3.0% ±5.0%
Overshoot/undershoot	At turn-on	≤10%
Transient response	+5.1V (1.5A to 3A step)	±150mV max. dev., 500µs recovery
Temperature coefficient		±0.02%/°C
Oversvoltage protection	+5.1V output	6.25V ±0.75Vout
Output power limit	Primary power limited	50W Pout, min. 110W Pin, max.
Short circuit protection	Multiple output	30 seconds
INPUT SPECIFICATIONS		
Input voltage range	Universal input	90 to 264VAC 120 to 370VDC
Input frequency range		47Hz to 440Hz
Input surge current	110VAC, cold start 230VAC, cold start	15A 32A
Safety ground leakage current	110VAC, 60Hz 230VAC, 50Hz	0.2mA 0.4mA

EMC CHARACTERISTICS		
Conducted emissions	EN55022, FCC part 15	level B
Radiated emissions	EN55022, FCC part 15	level A
ESD air	EN61000-4-2, level 3	Perf. criteria 2
ESD contact	EN61000-4-2, level 4	Perf. criteria 2
Surge	EN61000-4-5, level 3	Perf. criteria 2
Fast transients	EN61000-4-4, level 3	Perf. criteria 2
Radiated immunity	EN61000-4-3, level 3	Perf. criteria 2
Conducted immunity	EN61000-4-6, level 3	Perf. criteria 2


GENERAL SPECIFICATIONS		
Hold-up time	110VAC 230VAC	10ms @ 40W 60ms @ 40W
Efficiency		68% min. @ 40W
Isolation voltage	Input/output Input/chassis	3000VAC 1500VAC
Switching frequency		Variable
Approvals and standards (See Note 8)	VDE0805, EN60950, IEC950 BABT, IEC1010, UL1950 CSA C22.2 No. 950	
Weight		200g (7.06oz)
MTBF	MIL-HDBK-217F	150,000 Hours

ENVIRONMENTAL SPECIFICATIONS		
Thermal performance	Operating Non-operating 0°C to 50°C ambient, convection cooled 50°C to 70°C, ambient conv. cooled Peak (0°C to 50°C) max. 60s	0°C to +70°C -40°C to +85°C 40W Derate linearly to half load 50W
Relative humidity	Non-condensing	5% to 95% RH
Altitude	Operating Non operating	10,000 feet max. 30,000 feet max.
Vibration	Three orthogonal axes, random vibration, 10 minute test for each axis	2.4G rms 5Hz to 500Hz

### International Safety Standard Approvals

 VDE0805/EN60950/IEC950/IEC1010 File No. 10401-3336-1076  
Licence No. 70567, 1076 and 90354

 UL1950 File No. E136005

 CSA C22.2 No. 950 File No. LR41062C

 Certificate No. PS/605108

# 40 Watt AC/DC universal input switch mode power supplies


OUTPUT VOLTAGE	OUTPUT CURRENT			RIPPLE (4)	TOTAL REG. (5)	MODEL NUMBER (B)
	MAX (1)	PEAK (2)	FAN (3)			
+ 5.1V (I <sub>A</sub> )	3A	7A	4A	50mV	±3.0%	NAN40-7608 (5)
+12V (I <sub>B</sub> )	2A	3A	2A	120mV	±5.0%	
-12V (I <sub>C</sub> )	0.35A	1A	0.5A	120mV	±5.0%	
+5.1V (I <sub>A</sub> )	3A	7A	4A	50mV	±3.0%	NAN40-7607 (5)
+12V (I <sub>B</sub> )	2A	3A	2A	120mV	±5.0%	
-5V (I <sub>C</sub> )	0.35A	1.0A	0.5A	50mV	±5.0%	
+5.1V (I <sub>A</sub> )	3A	7A	4A	50mV	±3.0%	NAN40-7629 (5)
+12V (I <sub>B</sub> )	2A	3A	2A	120mV	±5.0%	

**Notes**

- Natural convection cooling (40W maximum).
- Peak output current lasting less than 60 seconds with duty cycle less than 5%. During peak loading, output voltage may exceed total regulation limits.
- Forced air, 20CFM at 1 atmosphere, 50W maximum.
- Figure is peak-to-peak. Output noise measurements are made across a 50MHz bandwidth using a 12 inch twisted pair, terminated with a 47µF capacitor.
- Total regulation is defined as the static output regulation at 25°C, including initial tolerance, line voltage within stated limits, load currents within stated limits and output voltages adjusted to their factory settings. For multiple output units to maintain stated regulation then:  
 $0.25 \leq I_A / I_B \leq 5$ , for  $I_B > 0.3A$   
 $0.50 \leq I_A / I_B \leq 5$ , for  $I_B < 0.3A$   
 Minimum load must also be 4W to achieve design MTBF.  
 For maximum output current  $I_C$  on triple-output models, i.e. for:  $I_C = I_{Max.}$ , then  $I_A \text{ min.} \geq 0.5A$  and  $I_B \geq I_C$ .
- Derating curve is application specific for ambient temperatures >50°C, for optimum reliability, no part of the heatsink should exceed 120°C, and no semiconductor case temperature should exceed 130°C.
- Caution: allow a minimum of 1 second after disconnecting line power when making thermal measurements.
- This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.


**Mechanical notes**

- Ground pad encircling mounting hole near P1 allows system grounding through a metal stand-off of up to 8mm max. diameter to metal chassis.
- A standard L-bracket and cover is available for mounting, which contains all screws, connectors and necessary mounting hardware. Order part number 'NAL40 COVER KIT'.

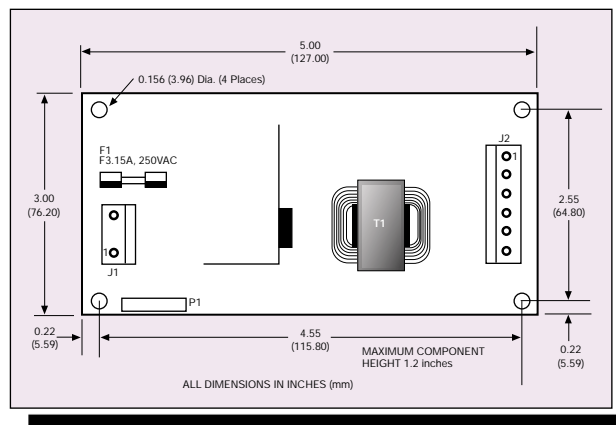

INPUT	
PIN CONNECTIONS	
J1	
Pin 1	AC Neutral
Pin 2	No Pin
Pin 3	AC Line
P1	
Pin 1	Safety Ground

OUTPUT PIN CONNECTIONS		
J2	DUAL	TRIPLE
P1	+12V	V (B)
P2	+5.1V	V (A)
P3	+5.1V	V (A)
P4	Return	Return
P5	Return	Return
P6	N/C	V (C)



**AC (J1) mating connector**

Molex 09-50-3031 or equiv. with Molex 08-50-0105 or equiv. crimp terminals.

**DC (J2) mating connector**

Molex 09-50-3061 or equiv. with Molex 08-50-0164 or equiv. crimp terminals.

Data Sheet © Artesyn Technologies® 2001

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.