Kingbright

1.8mm SOLID STATE LAMP

WP1060GD

GREEN


Features

- •1.8mm DIAMETER SMALL SIZE LED LAMP.
- •ULTRA BRIGHTNESS IS AVAILABLE.
- •RELIABLE AND RUGGED.
- •VERSATILE MOUNTING ON P.C. BOARD OR PANEL.
- •AVAILABLE IN DIFFUSED LENS.
- •Rohs Compliant.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions

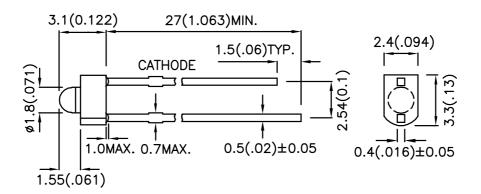

Notes

- All dimensions are in millimeters (inches).
- 2. Tolerance is $\pm 0.25 (0.01")$ unless otherwise noted.
- 3. Lead spacing is measured where the leads emerge from the package.
- 4. Specifications are subject to change without notice.

 SPEC NO: DSAF2115
 REV NO:V.1
 DATE: APR/11/2005
 PAGE: 1 OF 3

 APPROVED: J. Lu
 CHECKED: Allen Liu
 DRAWN: W.J.ZHU
 ERP:1101002654

Kingbright

Selection Guide

Part No.	Dice	Lens Type	lv (mcd) @ 10mA		Viewing Angle
			Min. Typ.		2 θ 1/2
WP1060GD	GREEN (GaP)	GREEN DIFFUSED	5	10	70°

Note:

Electrical / Optical Characteristics at Ta=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lr	Reverse Current	Green		10	uA	VR = 5V

Absolute Maximum Ratings at TA=25°C

Parameter	Green	Units		
Power dissipation	105	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
Lead Solder Temperature [3]	ad Solder Temperature [3] 260°C For 5 Seconds			


Notes

- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.
- 3. 5mm below package base.

SPEC NO: DSAF2115 REV NO:V.1 DATE: APR/11/2005 PAGE: 2 OF 3
APPROVED: J. Lu CHECKED: Allen Liu DRAWN: W.J.ZHU ERP:1101002654


^{1.} θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


Kingbright

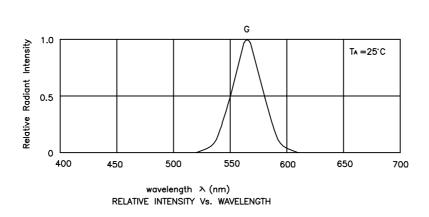



Green


WP1060GD











Remarks

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm

2. Luminous Intensity: +/-15%

3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

 SPEC NO: DSAF2115
 REV NO:V.1
 DATE: APR/11/2005
 PAGE: 3 OF 3

 APPROVED: J. Lu
 CHECKED: Allen Liu
 DRAWN: W.J.ZHU
 ERP:1101002654