


**200 Krad(Si) Ultra Low Dropout  
Linear Regulator  
Hermetic Package**

**OMR9807SC  
OMR9807SF  
+5.0Vin to +2.5Vout / 3.0A**

**Product Summary**

| Part Number | Vin   | Vout | Io   | Package         |
|-------------|-------|------|------|-----------------|
| OMR9807SC   | 5.0 V | 2.5V | 3.0A | MO-078AA        |
| OMR9807SF   | 5.0 V | 2.5V | 3.0A | 8-Lead Flatpack |



The OMR9807 is a radiation hardened, ultra low dropout linear regulator designed specifically for space applications. This product has been characterized to a total ionizing dose of 200 Krad (Si) per MIL-STD-883, Method 1019, Condition A at both high and low dose rates under biased and unbiased conditions to account for ELDRS effects in bipolar devices. The ultra low dropout voltage of 0.4V @ 3A makes the part particularly useful for applications requiring low noise and higher efficiency.

**Features:**

- Total dose and low dose capability to 200 Krad(Si) allows use in space applications
- Ultra low dropout voltage of 0.4 volts significantly reduces power consumption
- Low noise, higher efficiency
- Remote shutdown permits power sequencing to be easily implemented
- Hermetic MO-078AA (TO-258AA) and 8-lead flat pack ensure higher reliability
- K-level screened

**Absolute Maximum Ratings**


| Symbol     | Parameter                                              | Value       | Units |
|------------|--------------------------------------------------------|-------------|-------|
| $I_o$      | Output Current                                         | 3.5         | A     |
| $V_{in}$   | Input Voltage                                          | +7.0        | V     |
| $P_{TOT}$  | Power Dissipation TC=25 °C                             | 19          | W     |
| $R_{THJC}$ | Thermal Resistance, Junction to Case (MO-078AA)        | 6.5         | °C/W  |
| $R_{THJC}$ | Thermal Resistance, Junction to Case (8 lead flatpack) | 6.5         | °C/W  |
| $T_J$      | Operating Junction                                     | -55 to +125 | °C    |
| $T_{STG}$  | Storage Temperature Range                              | -65 to +150 | °C    |
| $T_L$      | Lead Temperature                                       | 300         | °C    |



**Electrical Characteristics @ TA= 25°C (Unless Otherwise Specified)**

| Parameter                  | Conditions                           | Symbol         | Min.  | Typ. | Max   | Unit |
|----------------------------|--------------------------------------|----------------|-------|------|-------|------|
| Output Voltage             | Vin = 5.0V, Io = 3.0A                | Vout           | 2.475 | 2.5  | 2.525 | V    |
| Input Voltage Range-       | Io= 3.0A                             |                | 4.5   |      | 6.5   | V    |
| Line Regulation            | 4.75 ≤ Vin ≤ 5.25, Io= 3.0A          | Vline          | -100  |      | +100  | mV   |
|                            | 4.5 ≤ Vin ≤ 5.5, Io= 50mA            |                | -5    |      | +5    | mV   |
| Load Regulation            | Vin= 5.0V<br>10ma ≤ Iout ≤ 3.0A      | Vload          | -20   |      | +20   | mV   |
| Dropout Voltage            |                                      | Vdrop          |       |      | 0.4   | V    |
| Current Limit              | Vin= 5.0V, Overcurrent<br>Latchup    | Ilatch         | 3.0   |      |       | A    |
| Ripple Rejection           | F= 120 Hz., Vout= Vref               |                | 65    |      |       | dB   |
| Shutdown source current    | Vshdn= 5V                            | Ishdn          |       | 200  |       | uA   |
| Shutdown Pin Threshold     | Isource= 200uA                       | Vshdn          | 1.0   |      | 1.6   | V    |
| Output Voltage at Shutdown | Vin= 5.0oV, Io= 50mA,<br>Shdn= +5.0V | Vout<br>(shdn) | -0.1  |      | +0.1  | V    |

**Electrical Characteristics TA= -55 to +125°C**

| Parameter                         | Conditions                           | Symbol         | Min.  | Typ. | Max   | Unit |
|-----------------------------------|--------------------------------------|----------------|-------|------|-------|------|
| Output Voltage                    | Vin = 5.0V, Io = 3.0A                | Vout           | 2.375 | 2.5  | 2.625 | V    |
| Input Voltage Range-<br>Operating | Io= 3.0A                             |                | 4.5   |      | 6.5   | V    |
| Line Regulation                   | 4.75 ≤ Vin ≤ 5.25, Io= 3.0A          | Vline          | -150  |      | +150  | mV   |
|                                   | 4.5 ≤ Vin ≤ 5.5, Io= 50mA            |                | -150  |      | +150  | mV   |
| Load Regulation                   | Vin= 5.0V<br>10ma ≤ Iout ≤ 3.0A      | Vload          | -150  |      | +150  | mV   |
| Dropout Voltage                   |                                      | Vdrop          |       |      | 0.4   | V    |
| Current Limit                     | Vin= 5.0V, Overcurrent<br>Latchup    | Ilatch         | 3.0   |      |       | A    |
| Ripple Rejection                  | F= 120 Hz., Vout= Vref               |                | 65    |      |       | dB   |
| Shutdown source current           | Vshdn= 5V                            | Ishdn          |       | 200  |       | uA   |
| Shutdown Pin Threshold            | Isource= 200uA                       | Vshdn          | 1.0   |      | 1.6   | V    |
| Output Voltage at Shutdown        | Vin= 5.0oV, Io= 50mA,<br>Shdn= +5.0V | Vout<br>(shdn) | -0.1  |      | +0.1  | V    |

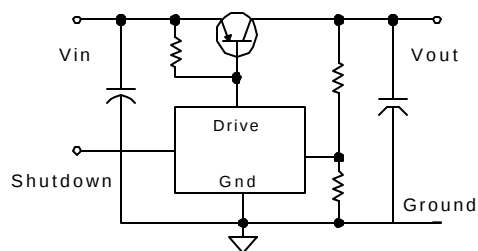**Simplified Schematic**

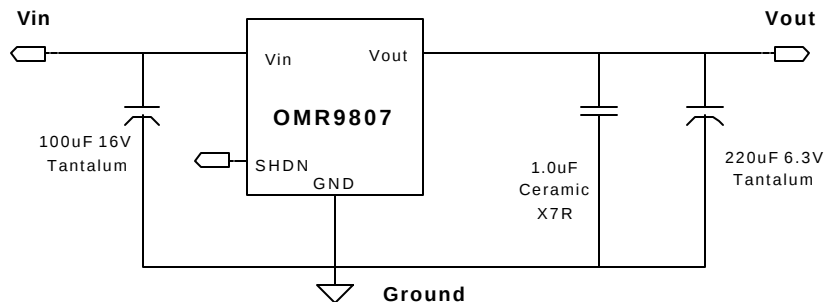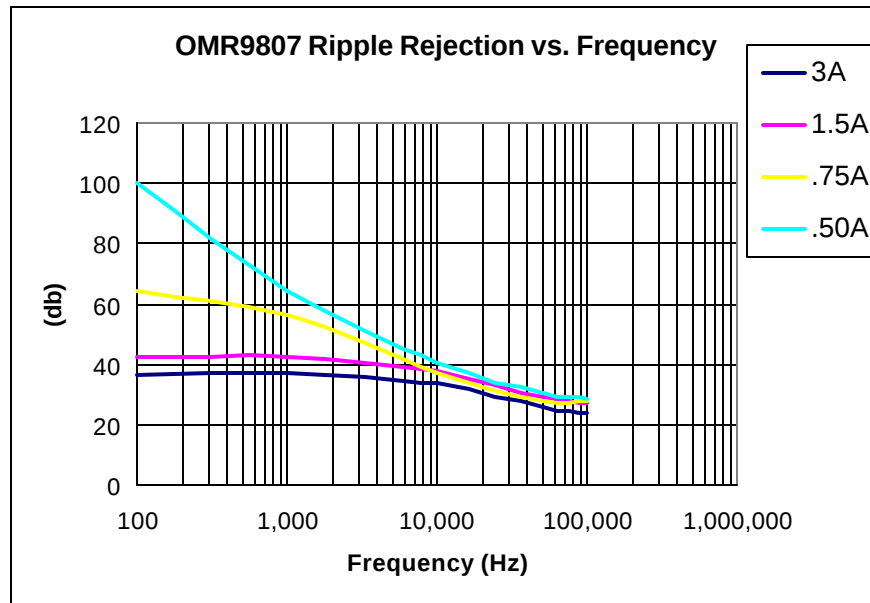

In order to maintain regulation and stability specified additional input and output bulk capacitors are recommended. Capacitors recommended above should be low ESR tantalums with tolerances of +/- 20% max. Internal to the product are a 4.7uF input capacitor and a 4.7uF output capacitor in parallel with a 0.33uF ceramic capacitor.

**Shutdown:** The regulator can be shutdown by applying a voltage >1.6V to pin 4. The regulator will restart when the SHDN pin is pulled below the shutdown threshold of 1.0V. If remote shutdown is not required, pin 4 should be connected to GND to insure a safe "off" state.


## OMR9807SC, OMR9807SF

International  
**IR** Rectifier

### Mechanical Outline MO-078AA

**Base:** GLIDCOP  
**Pins:** Copper core, Alloy 52  
**Seals:** Glass


| Pin Connections |               |
|-----------------|---------------|
| Terminal        | Description   |
| 1               | Vin           |
| 2               | GND           |
| 3               | Vout          |
| 4               | Shutdown      |
| 5               | No Connection |

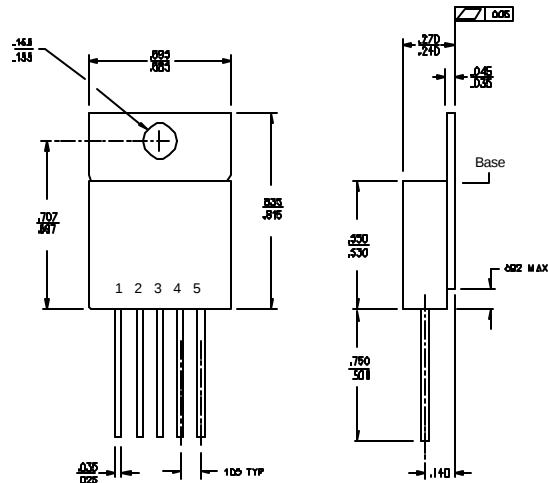

### Mechanical Outline 8-Lead Flat Pack

**Base:** 1010-1018 C.R.S.  
**Pins:** #52 Alloy, Copper Cored  
**Seals:** Glass – 9013 or Equiv.  
**Finish:** 100-250 Microinches Electroless Nickel Over 50-250 Microinches Electrolytic Nickel.

| Pin Connections |               |
|-----------------|---------------|
| Terminal        | Description   |
| 1,2             | GND           |
| 3               | Shutdown      |
| 4               | No Connection |
| 5,6             | Vout          |
| 7,8             | Vin           |

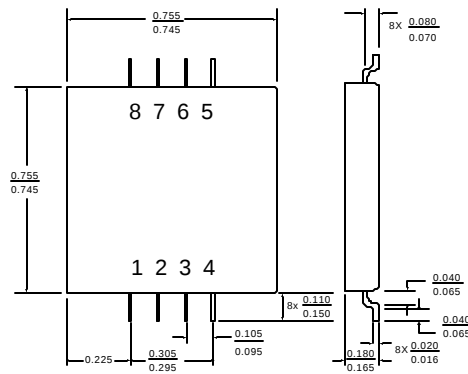

| <b>Part Number Nomenclature</b> |                                |                    |                              |                 |                 |
|---------------------------------|--------------------------------|--------------------|------------------------------|-----------------|-----------------|
| <b><u>OM</u></b>                | <b><u>R</u></b>                | <b><u>9807</u></b> | <b><u>X</u></b>              | <b><u>X</u></b> | <b><u>X</u></b> |
| Omnirel                         | Radiation<br>Hardened/Tolerant | Device             | S=Isolated<br>N=Non-Isolated | Package         | Screening       |

| Part Number | Package Description | Screening                 |
|-------------|---------------------|---------------------------|
| OMR9807SCP  | MO-078AA 5 - Lead   | 100% Final Electrical     |
| OMR9807SCH  | MO-078AA 5 - Lead   | Class H per MIL-PRF-38534 |
| OMR9807SCK  | MO-078AA 5 - Lead   | Class K per MIL-PRF-38534 |
| OMR9807SFP  | 8 -Lead Flat Pack   | 100% Final Electrical     |
| OMR9807SFH  | 8 -Lead Flat Pack   | Class H per MIL-PRF-38534 |
| OMR9807SFK  | 8 -Lead Flat Pack   | Class K per MIL-PRF-38534 |

**MIL-PRF-38534 Screening Requirements**

| TEST/INSPECTION          | SCREENING LEVEL |                          | MIL-STD-883 |
|--------------------------|-----------------|--------------------------|-------------|
|                          | Class H         | Class K<br>(Space Level) | Method      |
| Pre Seal Burn-In         | Optional        | Optional                 | 1030        |
| Nondestructive Bond Pull | N/A             | 100%                     | 2023        |
| Internal Visual          | 100%            | 100%                     | 2017        |
| Temperature Cycle        | 100%            | 100%                     | 1010        |
| Constant Acceleration    | 100%            | 100%                     | 2001        |
| Mechanical Shock         | 100%            | 100%                     | 2002        |
| PIND                     | N/A             | 100%                     | 2020        |
| Pre Burn-In Electrical   | Optional        | 100%                     |             |
| Burn-In                  | 100%            | 100%                     | 1015        |
| Final Electrical         | 100%            | 100%                     |             |
| Seal                     | 100%            | 100%                     | 1014        |
| Radiographic             | N/A             | 100%                     | 2012        |
| External Visual          | 100%            | 100%                     | 2009        |