

Product Specifications
May 1994

(1 of 2)

Low-Noise GaAs FETs
Features


- High Gain
- Super Low-Noise
- Pseudomorphic HEMT
- 70 Mil Hermetic Package

Applications

- Satellite Receivers
- Point-to-Point Radio Receivers
- Commercial Communications
- Defense Electronics

Description

The CFA0103-L series is a family of low-noise, high-gain FETs intended for satellite and point-to-point radio receiver applications. Manufactured in Celeritek's proprietary, state-of-the-art PHEMT process and assembled in an industry

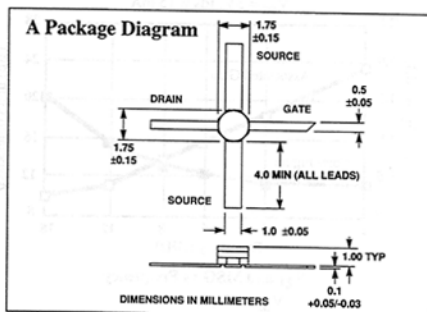

standard, 70 mil hermetic package, this high reliability family of devices is ideally suited for operation-critical applications where reliability and performance are required.

Specifications (TA = 25°C)

Parameter	Vds (V)	Bias Ids (mA)	Frequency (GHz)	Units	Performance Specifications			
					Grade	Min	Typ	Max
NF _{opt}	3.0	15.0	12.0	dB	L1	—	0.7	0.8
					L2	—	0.9	1.0
					L3	—	0.9	1.2
G _a	3.0	15.0	12.0	dB	L1	10.0	11.0	—
					L2	10.0	11.0	—
					L3	8.0	9.0	—
S ₂₁ ²	3.0	15.0	2.0	dB	—	13.0	—	
			10.0	dB	—	9.6	—	
			18.0	dB	—	7.2	—	
P _{1dB}	6.0	40.0	12.0	dBm	—	19.0	—	
g _m	Vds = 3.0V	Vgs = 0V	—	mS	—	90.0	—	
I _{dss}	Vds = 3.0V	Vgs = 0V	—	mA	30.0	60.0	120.0	
V _p	Vds = 3.0V	Ids = 1mA	—	Volts	-0.5	-1.3	-2.5	
BV _{gd}	Igd = 100 μA	—	—	Volts	-5.5	-8.0	—	
R _{th}	—	—	—	°C/W	—	250	—	





Absolute Maximum Ratings

Parameter	Symbol	Rating
Drain-Source Voltage	Vds	8V
Gate-Source Voltage	Vgs	-5V
Drain Current	Ids	Idss
Continuous Dissipation	Pt	800mW
RF Power In	Pin	+17 dBm
Channel Temperature	Tch	175°C
Storage Temperature	Tstg	-65°C to +175°C

Typical Noise Parameters (Vds = 3V, Ids = 15 mA)

Freq (GHz)	NF _{opt}	G _a (dB)	Gamma Mag	Opt Ang	Rn/50
2.0	0.39	23.6	0.87	36	0.42
4.0	0.47	18.3	0.77	71	0.34
6.0	0.57	15.2	0.69	100	0.27
8.0	0.69	13.0	0.63	124	0.22
10.0	0.84	11.5	0.58	147	0.18
12.0	1.00	10.6	0.53	171	0.16
14.0	1.18	10.1	0.49	-163	0.15
16.0	1.38	9.9	0.46	-132	0.16
18.0	1.60	9.8	0.42	-94	0.18

Typical Performance (TA = 25°C)

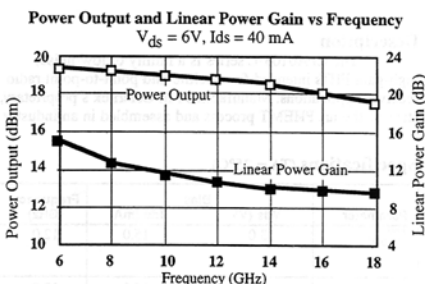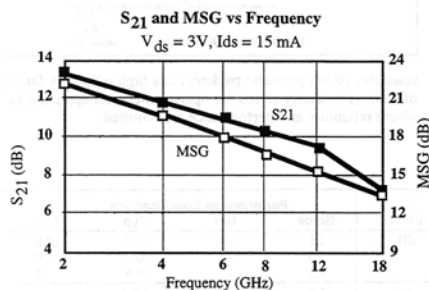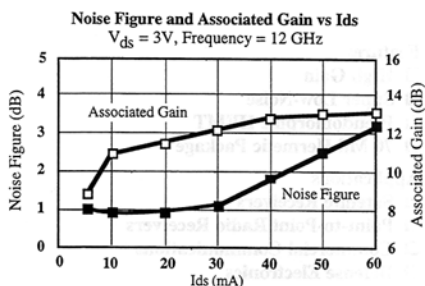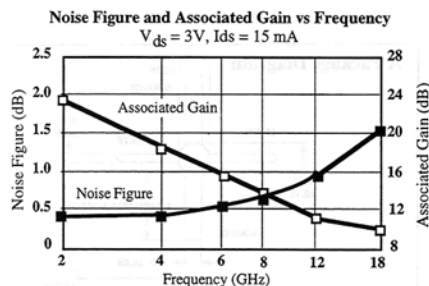

Typical Scattering Parameters (TA = 25°C, V_{ds} = 3V, I_{ds} = 15 mA)

CFA0103

Frequency (GHz)	S ₁₁		S ₂₁			S ₁₂			S ₂₂		MSG (dB)
	(Mag)	(Ang)	(dB)	(Mag)	(Ang)	(dB)	(Mag)	(Ang)	(Mag)	(Ang)	
2.0	0.97	-32	13.5	4.73	149	-31.1	0.03	69	0.56	-22	22.3
4.0	0.88	-69	11.9	3.94	113	-25.8	0.05	45	0.55	-50	18.9
6.0	0.79	-96	10.7	3.43	84	-23.6	0.07	27	0.54	-70	17.1
8.0	0.66	-129	10.6	3.39	55	-22.0	0.08	10	0.46	-84	16.3
10.0	0.59	-170	9.6	3.02	22	-21.4	0.09	-13	0.36	-121	15.5
12.0	0.57	162	9.0	2.82	-4	-21.6	0.08	-21	0.42	-138	15.3
14.0	0.57	123	8.5	2.66	-35	-21.0	0.09	-40	0.35	-166	14.8
16.0	0.57	104	7.7	2.43	-66	-20.9	0.09	-56	0.47	151	14.3
18.0	0.51	80	7.2	2.29	-100	-21.3	0.09	-79	0.59	128	14.3

Celertek reserves the right to make changes without further notice to any products herein. Celertek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Celertek assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Celertek does not convey any license under its patent rights nor the rights of others. Celertek products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Celertek product could create a situation where personal injury or death may occur. Should Buyer purchase or use Celertek products for any such unintended or unauthorized application, Buyer shall indemnify and hold Celertek and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Celertek was negligent regarding the design or manufacture of the part. Celertek is a registered trademark of Celertek, Inc. Celertek, Inc. is an Equal Opportunity/Affirmative Action Employer.