



# RS3A THRU RS3M

## 3.0 AMPS. Fast Recovery Surface Mount Rectifiers



Voltage Range  
50 to 1000 Volts  
Current  
3.0 Amperes


### Features

- ✧ For surface mounted application
- ✧ Glass passivated junction chip
- ✧ Built-in strain relief, ideal for automated placement
- ✧ Plastic material used carries Underwriters Laboratory Classification 94V-O
- ✧ Fast switching for high efficiency
- ✧ High temperature soldering: 260°C /10 seconds at terminals

### Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Terminals: Solder plated
- ✧ Polarity: Indicated by cathode band
- ✧ Packing: 16mm tape per E1A STD RS-481
- ✧ Weight: 0.21 gram

### SMC/DO-214AB

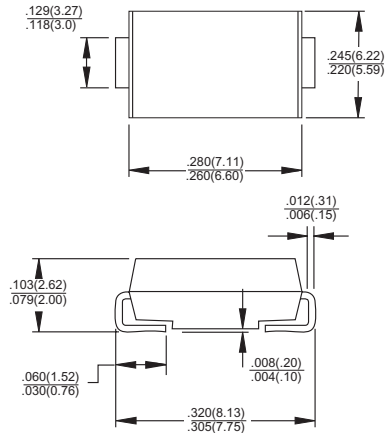

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	RS 3A	RS 3B	RS 3D	RS 3G	RS 3J	RS 3K	RS 3M	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current See Fig. 1 @ $T_L=75^\circ\text{C}$	$I_{(AV)}$	3.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	100							A
Maximum Instantaneous Forward Voltage @ 3.0A	$V_F$	1.3							V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	$I_R$	10 250							$\mu\text{A}$ $\mu\text{A}$
Maximum Reverse Recovery Time ( Note 1 )	$T_{rr}$	150			250	500		nS	
Typical Junction Capacitance ( Note 2 )	$C_j$	60							pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$ $R_{\theta JL}$	50.0 15.0							$^\circ\text{C}/\text{W}$ $^\circ\text{C}/\text{W}$
Operating Temperature Range	$T_J$	-55 to +150							$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 to +150							$^\circ\text{C}$


Notes: 1. Reverse Recovery Test Conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{RR}=0.25\text{A}$

2. Measured at 1 MHz and Applied  $V_R=4.0$  Volts


3. Thermal Resistance from Junction to Ambient and from Junction to Lead Mounted on P.C.B. with 0.6"x0.6" ( 16 x 16 mm ) Copper Pad Areas.

## RATINGS AND CHARACTERISTIC CURVES (RS3A THRU RS3M)


**FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE**

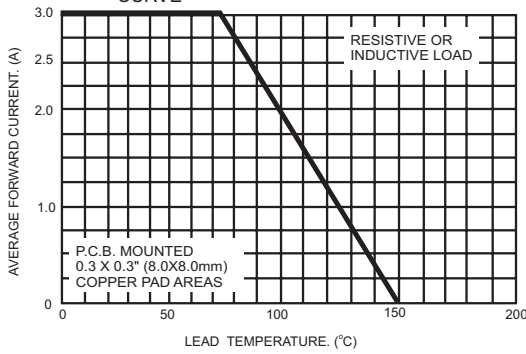


**FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

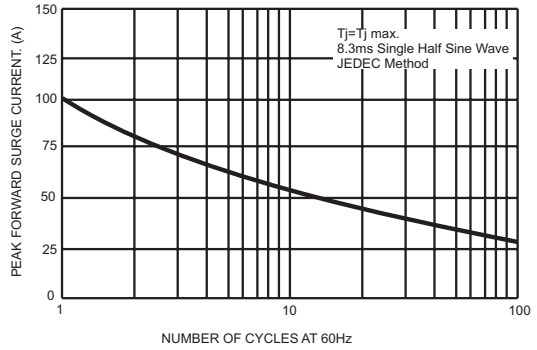

**FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

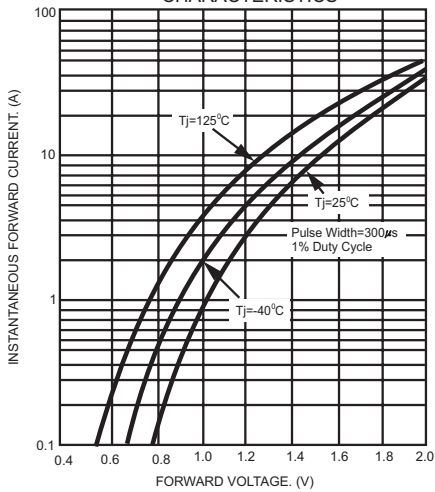

**FIG.4- TYPICAL REVERSE CHARACTERISTICS**

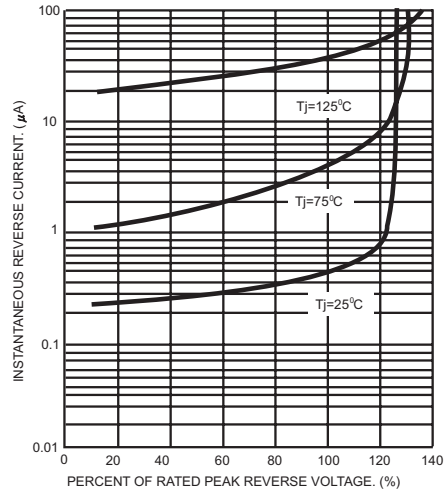

**FIG.5- TYPICAL JUNCTION CAPACITANCE**

