


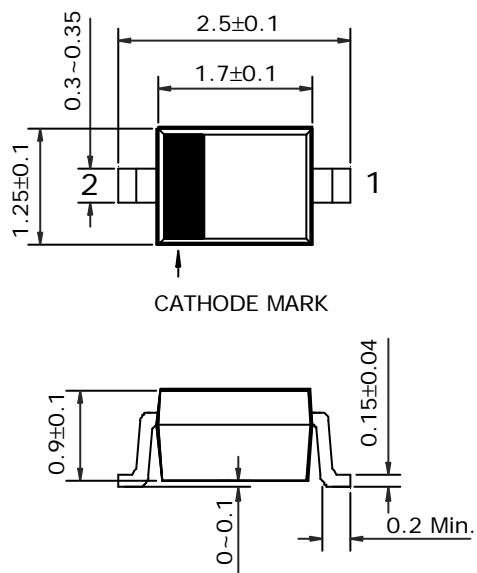
## Features

- Compact type
- Radiation size 1.25mm × 1.7mm
- Surface mount lead configuration

## Ordering Information

Type NO.	Marking	Package Code
SDZ5V6D	Z3	SOD-323

## Outline Dimensions

**unit : mm**

**PIN Connections**

1. Anode
2. Cathode

**Absolute maximum ratings**

(Ta=25°C)

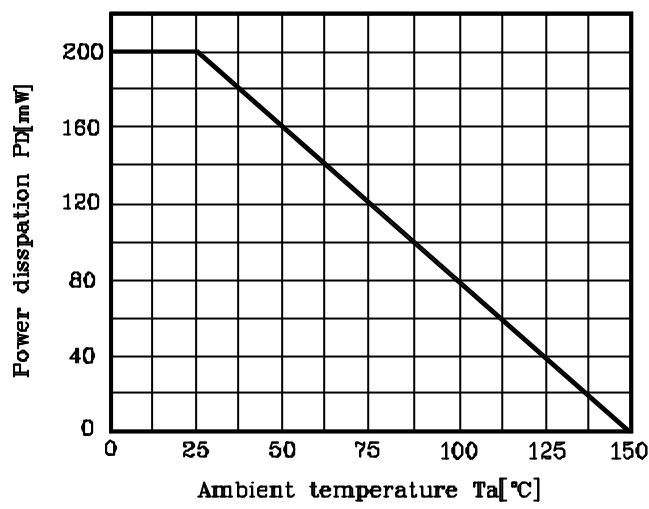
Characteristic	Symbol	Ratings	Unit
Power dissipation	P <sub>D</sub>	200	mW
Junction temperature	T <sub>J</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-55~150	°C

**Electrical Characteristics**

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Zener voltage	V <sub>Z</sub>	I <sub>Z</sub> =5mA	5.35	-	5.85	V
Dynamic impedance	Z <sub>ZT</sub>	I <sub>Z</sub> =5mA	-	-	25	Ω
KNEE dynamic impedance	Z <sub>ZK</sub>	I <sub>Z</sub> =0.25mA	-	-	1800	Ω
Reverse current	I <sub>R</sub>	V <sub>R</sub> =3V	-	-	2	μA

## Electrical Characteristic Curves

**Fig. 1  $P_D$ ,  $T_a$** **Fig. 2  $I_Z$ ,  $V_Z$** 