


T1 TRANSFORMER
0559-5999-05

TM0014


Bel introduces a new dual-in-line, T1 Transformer.

* Isolation Voltage is 1500 Vrms

MECHANICALS

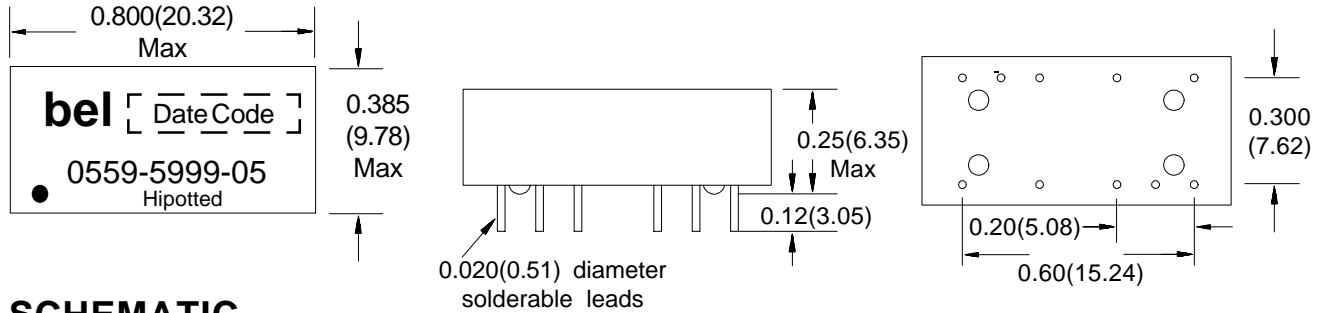

SCHEMATIC

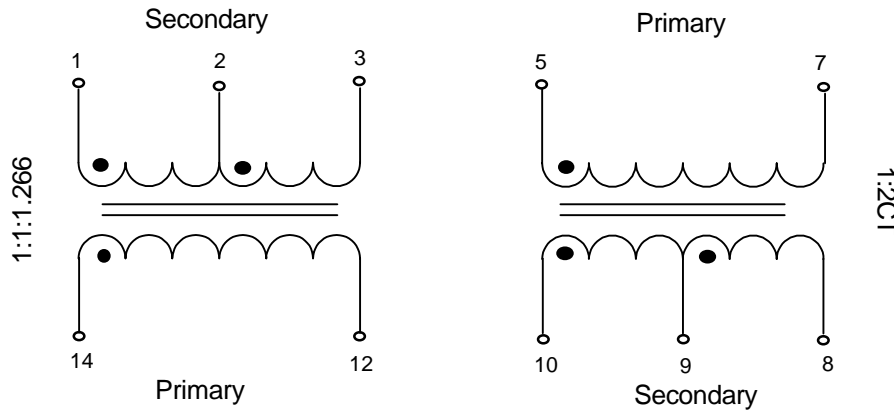

All dimensions are in in(mm).
Dimension tolerance is +/-0.02(0.51) unless otherwise specified.

Note: Pins (14-12) to Pins (1-3) is a 1:1.266 and Pins (14-12) to Pins (2-3) is a 1:1

ELECTRICALS @ 25° C

Part Number	Primary Inductance OCL (mH) Min		Leakage Inductance L_L (μ H) Max		Coupling Capacitance C_{wv} (pF) Max		DCR Ω (ohms) Max	
	Pins (5-7)	Pins (14-12)	Pins (5-7)	Pins (14-12)	Pins (14-1)	Pins (5-10)	Pins (5-7) to (14-12)	Pins (1-3) to (8-10)
0559-5999-05	1.2	1.5	0.4	0.5	35	40	0.7	1.1

Primary Inductance and Leakage Inductance measured at 100KHz, 20mV.

Corporate Office
Bel Fuse Inc.
198 Van Vorst Street, Jersey City, NJ 07302-4496
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: BelFuse@belfuse.com
Internet: http://www.belfuse.com

Far East Office
Bel Fuse Ltd.
8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office
Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K.
Tel: 44-1772-556601
Fax: 44-1772-888366